HGO - 4G LTE Improved


Multi Band Base Station Antenna


DESCRIPTION: New LTE improved for the LTE low band covering the **790-960MHz** and **1710-2700MHz** bands for **GSM 900/1800 dual-band**, **UMTS**, **WLAN** and **LTE systems**. Thanks to its very new electrical structure, the antenna guarantees high gain on all bands. It is protected by thermoplastic UV stabilized material for the best robustness and long life for outdoor and indoor installations. It is supplied with plastic bracket and fixing hardware for an easy installation on the mast or on the wall and it comes with 50 cm and 5m low loss cable /SMA-m


Electrical Data	
Туре	Multi Band Dipole Array
Frequency Range	790-960 MHz for GSM 900 and LTE 800
	1710-1880 MHz for GSM 1800
	1920-2170 MHz for UMTS
	2.4 - 2.7 GHz for WLAN and LTE 2600
Impedance	50 Ω
Radiation (H-plane)	360° Omnidirectional
Radiation (E-plane)	Beamwidth @ -3dB = see diagrams
Radiation angle deg.	0°
Polarization	Linear Vertical
Gain	5 dBi for GSM 900&1800 and LTE 800
	6 dBi for UMTS
	5÷6 dBi for WLAN and LTE 2600
Max Power (CW) @ 30°C	20 Watts for GSM 900 and LTE 800
	10 Watts for GSM 1800 & UMTS
	6 Watts for WLAN & LTE 2600
Cable Type / Length	White Low Loss / 50cm, 5m or other length on request
Connector	SMA-male (other type on request, acc min q.ty)

Mechanical Data

Materials	Thermoplastic UV Stabilized Grey RAL 7035,
	galvanized steel hardware
Wind Load @150 km/h	36 N
Wind Resistance	200 Km/h
Wind Surface	0.02 m²
Operating temperature	-40°C to + 80°C
Dimensions (approx.)	335 x 166 x 144 mm with bracket
Weight (approx.)	350 gr
Installation Type	Mast: Ø 25-42 mm with U-bolt (included)
	Wall: mounting screw (not included)

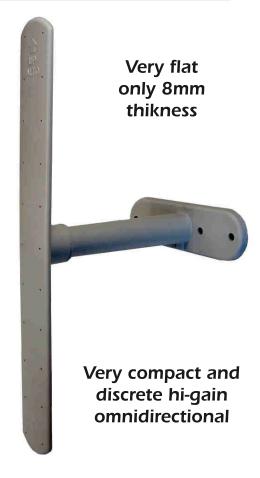




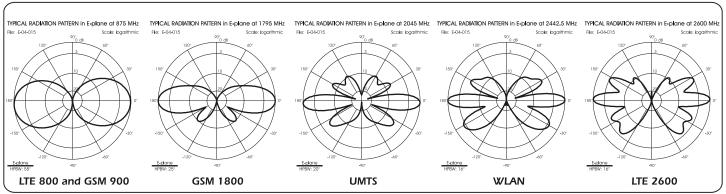



MOUNTING INSTRUCTIONS

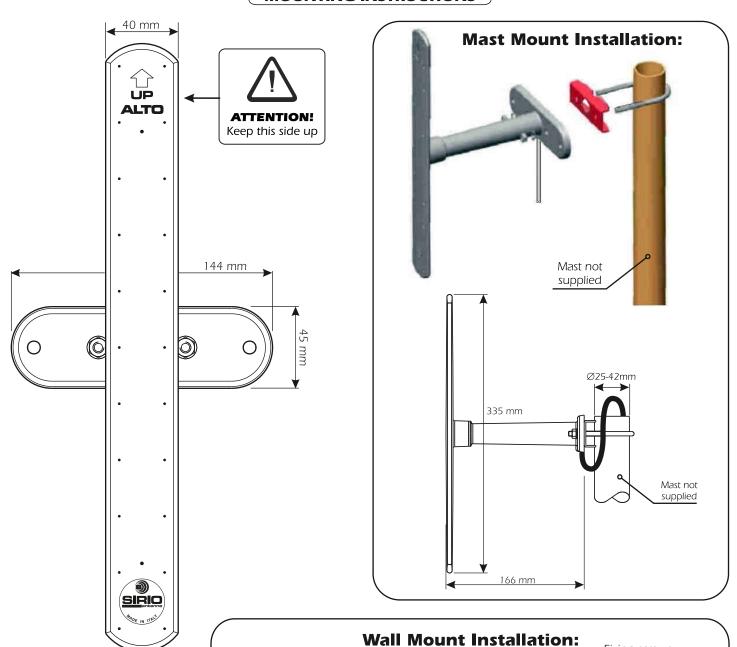


Fixing bracket part list	
O.ty	Description
1	Steel bracket
1	M6x180 U-bolt
2	M6 Flat Wascher
2	M6 Lock washer
2	M6 Hexagonal nut

Mounting needed tools: n. 1 10 mm open key

Fixing screws not supplied

The recommended installation is to drill a hole in the wall for the best cable fixation.



For the external cable fixation use the bracket hole to avoid cable damages / bendings.



HI-QUALITY ANTENNAS MADE IN ITALY