


## Konnect flex 45 click

Easy click mounting on the front of the module holder

- Easy and quick installation possible without requiring any tools
- Multiple connectivity
- Improved design, interface for level integration, no screws visible
- Frontwise dismounting of the adapter plates (only CablePort standard<sup>2</sup>)
- Also suitable for cable channels 45 with min. 60 mm installation depth

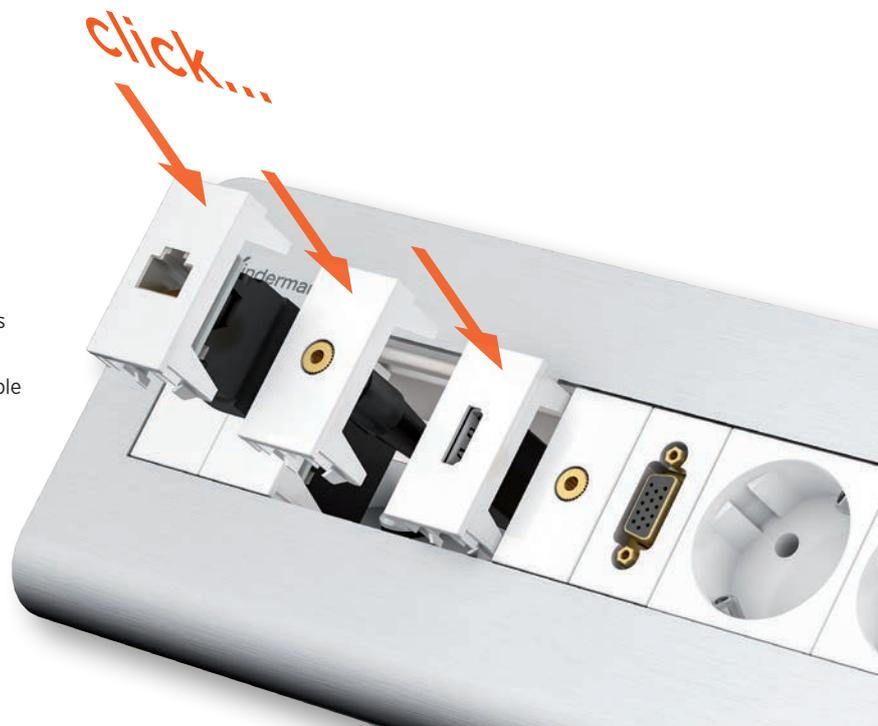

### Konnect flex 45 click - Miscellaneous

Illustration	Model	Connection, rear side	Ref. No.
	Faceplate		7464 000 400
	Faceplate (full size plate)		7464 000 500
	Push-button, stainless steel, 48 VDC/125 mA	Screw connection	7464 000 441
	Push-button, stainless steel, 30 VDC/500 mA	Euro plug	7464 000 442
	Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA light ring 9 - 12 VDC, (1 x open/close)	Euro plug	7464 000 443
	Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA light ring 5 VDC, (1 x open/close)	Cable+plug, 3 m with open ends	7464 000 448
	Faceplate with cable outlet with metal reinforcement on the rear	Opening: 8 mm	7464 000 446
		Opening: 12 mm	7464 000 447
	<b>Cable outlet socket incl. feed-through covers</b> <b>NEW!</b> For 2 connection cables needs the space of 4 half size plates ideal for CablePort frame slide		7464 000 450
	<b>Feed-through cover for SubD plug</b> with screws, replaces a cover of 7464 000 450		7464 000 451
	<b>Media control Neets SieRra</b>		7464 000 590
	<b>Media control Neets Echo</b>		7464 000 591
	<b>Media control Neets Echo Plus</b>		7464 000 593
	<b>NEB button field 8-fold</b> needs the space of 4 half size plates		7464 000 592

## Konnect flex 45 click

The adapter plates are available in 4 versions

- socket / socket, ca. 20 cm

- socket / 13/19-pin plug

- socket / plug, 100 cm
- socket / plug, 300 cm



### Konnect flex 45 click - Digital

Illustration	Model	Connection, rear side	Ref. No.
	HDMI - High Speed with Ethernet	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 542 7464 000 842 7464 000 942
	DVI-I (24 + 5-pin)	Cable+plug Cable+plug, 3 m	7464 000 502 7464 000 902
	DisplayPort	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 588 7464 000 888 7464 000 988

### Konnect flex 45 click - Digital to 19-pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	HDMI to 19-pin	Cable+plug Cable+plug, 3 m	7464 000 561 7464 000 961

### Konnect flex 45 click - VGA/Video

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15)	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 501 7464 000 801 7464 000 901

### Konnect flex 45 click - Analogue to 13-pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15 fully configured) to 13-pin	Cable+plug Cable+plug, 3 m	7464 000 552 7464 000 952



### Konnect flex 45 click - Audio

Illustration	Model	Connection, rear side	Ref. No.
	Audio L/R (cinch)	Cable+plug Cable+plug, 3 m	7464 000 510 7464 000 910
	Audio jack (3.5 mm stereo)	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 511 7464 000 811 7464 000 911
	XLR socket, 3-pin (full size plate) Neutrik socket	Soldering	7464 000 412

### Konnect flex 45 click - Daten/Netzwerk

Illustration	Model	Connection, rear side	Ref. No.
	USB 2.0 Type A / Type A	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 522 7464 000 822 7464 000 922
	USB 3.0 Type A / Type A	Cable+plug Cable+plug, 3 m	7464 000 529 7464 000 828

## Konnect flex 45 click - Daten/Network

Illustration	Model	Connection, rear side	Ref. No.
	<b>USB 2.0</b> B-socket/A-socket	Cable+plug	7464 000 525
	<b>NEW!</b> <b>USB 2.0 active hub</b> B-socket/A-socket with integrated repeater for max. 5 m cable length	Cable+plug	7464 000 528
	<b>USB 2.0</b> B-socket/B-plug	Cable+plug, 1 m	7464 000 829
	<b>Cat-6 (RJ45)</b> Cat-6a transmission properties are compatible with the ANSI/TIA 568 C.2 standard 500 MHz according to ISO/IEC 60603-7-51, 11801 AMD2:2010-04 Suitable for outer diameter AWG 26/7 - 22/1 LSA clamps colour-coded according to EIA/TIA 568 A&B	Cut+clamp	7464 000 423
	<b>Cat-6 (RJ45)</b>	Gender changer (1:1)	7464 000 523
	<b>Cat-6 (RJ45) BTR Netcom</b> Fully protected interface from Metz connect RJ45 cable coupling cat-6 class E 10 GBit Ethernet (IEEE 802.3an) Compliance of class E according to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09 Suitable for Power over Ethernet (PoE, PoE plus and UPoE)	Gender changer (1:1)	7464 000 526
	<b>NEW!</b> <b>Cat-6 (RJ45)</b>	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 527 7464 000 827 7464 000 927
	<b>Cat-7 (GG45) Nexans</b> Certified up to 1000 MHz, downward compatible with RJ45 (Cat-6)	Cut+clamp	7464 000 424
	<b>Cat-6/audio jack (3.5 mm stereo)</b>	Cable+plug	7464 000 587