



CablePort standard²

The classic model reinvented

The CablePort standard² is the result of our consistent and ambitious further development of the popular CablePort standard.

It can be mounted faster and more easily from above through the cutout of the desktop, even into furniture whose rearside is not accessible.


Click mounting along with a small installation depth of only 7 cm provides a maximum legroom and a high seating comfort.

For easy mounting and wiring the CablePort standard² features a practical service position.

The Konnect flex 45 click covers with their flush interfaces support the high-quality looks.

- Individual configuration with adapter plates of the Konnect flex 45 series
- Quick mounting due to click mechanism, no tools required
- Homogeneous appearance due to level-mounted interfaces
- Integration of Neets media control, USB-charger etc.
- Easier mounting into desktops from above
- Level-mounted desktop integration possible
- 3 versions: 2-fach, 4-fach, 6-fach
- Frame radius R5, installation depth 70 mm
- For desktops from 12 up to 48 mm thickness
- Mains connection with 3-pin GST18 plug (max. 16 A)

Quality
made
in
Germany
by Kindermann

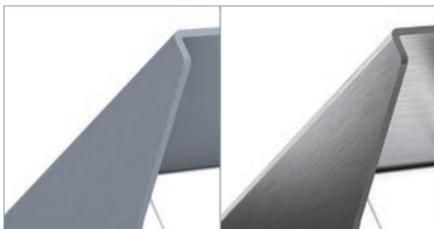

2 different surfaces

- Powder-coated steel silver, RAL 9006
- Stainless steel (brushed)



Casing

- Can be individually fitted
- Completely pre-mounted



Closed

- Level-mounted desktop integration possible

CablePort standard²

Completely pre-configured

CablePort standard²

6-fold for Quickselect 3.0



CablePort standard²

6-fold



CablePort standard²

4-fold



CablePort standard²

2-fold



	6-fold for Quickselect 3.0	6-fold
Outer dimensions	340 x 190 mm	
Cutout	317 x 170 mm	
Pre-mounted with	2 x mains 1 x VGA 1 x audio jack (3.5 mm stereo) 2 x HDMI 1 x cat-6 (RJ45) 1 x USB TypA all with cable+plug, 1m, socket / plug 3 x Push-button, stainless steel with blue LED light ring incl. 3 m control line with open ends	3 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 3 x cat-6 (RJ45) all with cable+plug, short socket / socket
	Powder-coated RAL 9006	Powder-coated RAL 9006
Ref. No.	7492 000 008	7492 000 006
	Stainless steel (brushed)	Stainless steel (brushed)
Ref. No.	7492 000 018	7492 000 016

	4-fold
Outer dimensions	250 x 190 mm
Cutout	227 x 170 mm
Pre-mounted with	2 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 1 x cat-6 all with cable+plug, short, socket / socket
	Powder-coated RAL 9006
Ref. No.	7492 000 004
	Stainless steel (brushed)
Ref. No.	7492 000 014

	2-fold
Outer dimensions	160 x 190 mm
Cutout	137 x 170 mm
Pre-mounted with	1 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 1 x cat-6 (RJ45) all with cable+plug, short, socket / socket
	Powder-coated RAL 9006
Ref. No.	7492 000 002

CablePort standard²

For individual configuration

CablePort standard²

6-fold



CablePort standard² / 6-fold

Outer dimensions 340 x 190 mm

Cutout 317 x 170 mm

Pre-mounted with	1 x mains 5 x empty	2 x mains 4 x empty	3 x mains 3 x empty	4 x mains 2 x empty	5 x mains 1 x empty	6 x mains
------------------	------------------------	------------------------	------------------------	------------------------	------------------------	-----------

Powder-coated RAL 9006

Ref. No. 7492 000 081 7492 000 082 7492 000 083 7492 000 084 7492 000 085 7492 000 086

Stainless steel (brushed)

Ref. No. 7492 000 061 7492 000 062 7492 000 063 7492 000 064 7492 000 065 7492 000 066

CablePort standard²

4-fold



CablePort standard² / 4-fold

Outer dimensions 250 x 190 mm

Cutout 227 x 170 mm

Pre-mounted with	empty casing 4 x empty	1 x mains 3 x empty	2 x mains 2 x empty	3 x mains 1 x empty	4 x mains
------------------	---------------------------	------------------------	------------------------	------------------------	-----------

Powder-coated RAL 9006

Ref. No. 7492 000 070 7492 000 071 7492 000 072 7492 000 073 7492 000 074

Stainless steel (brushed)

Ref. No. 7492 000 050 7492 000 051 7492 000 052 7492 000 053 7492 000 054

CablePort standard²

2-fold



CablePort standard² / 2-fold

Outer dimensions 160 x 190 mm

Cutout 137 x 170 mm

Pre-mounted with	1 x mains 1 x empty	2 x mains
------------------	------------------------	-----------

Powder-coated RAL 9006

Ref. No. 7492 000 031 7492 000 032

Stainless steel (brushed)

Ref. No. 7492 000 041 7492 000 042

CablePort standard²

With USB charger – for individual configuration

CablePort standard²

6-fold



CablePort standard² / 6-fold

Outer dimensions	340 x 190 mm		
Cutout	317 x 170 mm		
Equipment	USB charger with 2 x USB type A and integrated power supply (5 V / 1500 mA)		
Pre-mounted with	1 x mains 1 x USB charger (2x type A) 4 x empty	2 x mains 1 x USB charger (2x type A) 3 x empty	3 x mains 1 x USB charger (2x type A) 2 x empty
Powder-coated RAL 9006			
Ref. No.	7492 000 181	7492 000 182	7492 000 183
Stainless steel (brushed)			
Ref. No.	7492 000 161	7492 000 162	7492 000 163

CablePort standard²

4-fold



CablePort standard² / 4-fold

Outer dimensions	250 x 190 mm		
Cutout	227 x 170 mm		
Equipment	USB charger with 2 x USB type A and integrated power supply (5 V / 1500 mA)		
Pre-mounted with	1 x mains 1 x USB charger (2x type A) 2 x empty	2 x mains 1 x USB charger (2x type A) 1 x empty	
Powder-coated RAL 9006			
Ref. No.	7492 000 171	7492 000 172	
Stainless steel (brushed)			
Ref. No.	7492 000 151	7492 000 152	

Accessories for installation

Illustration	Model	Specification	Ref. No.
	Cable collector	Dimensions: 395 / 358 x 170 x 85 mm (LxBxH) with/without mounting elements For storing away power supply units and for connecting cables of the desktop casing.	7446 000 020
	Protective covering for folding table	Of metal, to protect and cover connection fields and devices under the table top. Dimensions: 420 x 340 x 140 mm (LxWxH). Prepared for use with Quickselect 3.0 or similar products. Right: GST18 plug and RJ45 gender changer. Left: Power connection GST18 socket and RJ45 gender changer.	5300 000 074