


P-36 GSM

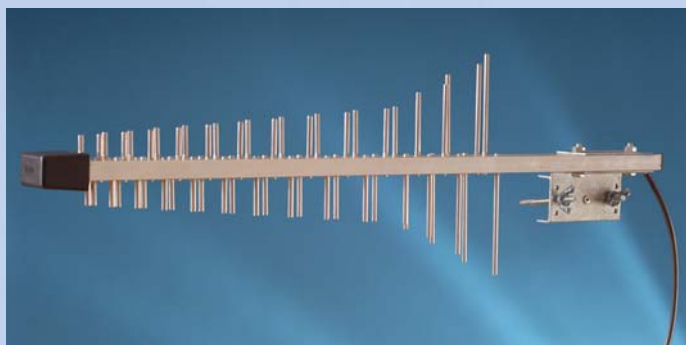

P-54 GSM-UMTS

	Frekv. pas <i>Frekv. pojas</i> Freq. range	Število elementov <i>Broj elemenata</i> No. of elements	Dobitek antene <i>Dobitak antene</i> Antenna gain	Razmerje naprej - nazaj <i>Odnos naprijed - nazad</i> Front - back ratio	Širina glav. lista H / V <i>Širina glav. latice H / V</i> Beam width H / V	Kabel / Max. VSWR <i>Kabel / Max. VSWR</i> Cable / Max. VSWR	Dolžina antene <i>Dužina antene</i> Length	Število v embalaži <i>Broju ambalaži</i> Packing	Prostor. <i>Volumen</i> Volume	Masa <i>Težina</i> Weight
	MHz	Ω	dB	dB	(°)		mm	kom / pcs	m ³	kg
P - 16 GSM *	850 - 960	16	9,5	20	81 / 57	POPE H155 L=10 m / 1,5 : 1	495	15	0,096	12,8
P-28 NMT / GSM *	380 - 960	28	8 - 9	20	91 / 62	POPE H155 L=10 m / 1,5 : 1	820	15	0,15	26,25
P - 36 GSM *	850 - 960	36	12,5	25	48 / 57	POPE H155 L=10 m / 1,5 : 1	995	10	0,10	11,5
P - 52 GSM / DCS *	860 - 960 1710 - 1880	52	10,5	25	45 / 36	POPE H155 L=10 m / < 1,5 : 1 GSM < 2 : 1 DCS	928	10	0,10	11,1
P - 30 UMTS*	1800 - 2170	30	11	20	47 / 52	POPE H155 L=10 m / < 2,0 : 1	470	15	0,053	14
P - 54 GSM - UMTS*	890 - 960 1710 - 1880 1920 - 2170	54	10 - 12	20	43 / 34	POPE H155 L=10 m / < 1,6 : 1	562	-	-	-

Vse antene imajo impedanco 50 Ohm / sve antene imajo impedancijo 50 Ohm / all antennas have impedance 50 Ohm.

* izvedba antene s priključnim »FME« konektorjem / izvedba antene sa »FME« priključnicom / antenna has »FME« connector

