


AurOEM

Save time with our proprietary Auracast™ module **AurOEM**, a subsystem solution. Trust our expertise in developing embedded Auracast™ solution to focus on innovating and adding value to your final products and third-party systems.

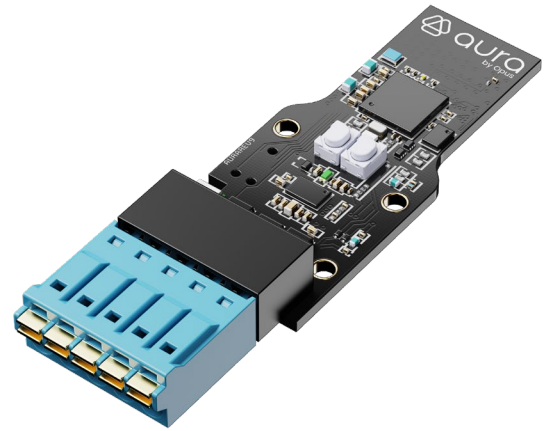

AUDIO INPUTS

LINE or MICRO inputs	1x LINE mono or stereo
Microphone input	Integrated on the circuit board

AURACAST™ OUTPUT

Power output	3 dbm
Multi-channel	Up to 2 transmission channels: 1 mono or 1 stereo

POWER SUPPLY

Voltage	5 - 12V DC / 1.5A
Current	< 100 mA

CONNECTIVITY

Connectivity	Auracast™ (Bluetooth 5.2 and up)
Qualification	Bluetooth SIG
Update	Wireless via AuraConnect application



AUDIO

Range field	30 m (free field)
On-board memory	2 Mo
Audio configuration	2 mono or 1 stéréo
Codec used	LC3
Cybersecurity	LESECURE encrypted audio stream protected by a unique password
Connection	Via QR code or password
Sampling frequencies	16/24/48 kHz

PRODUCT SPECIFICATIONS

Dimensions (L x W x D)	48 x 20,5 x 10,5 mm
Weight	< 5 g
Usage	In your products!

REAR VIEW

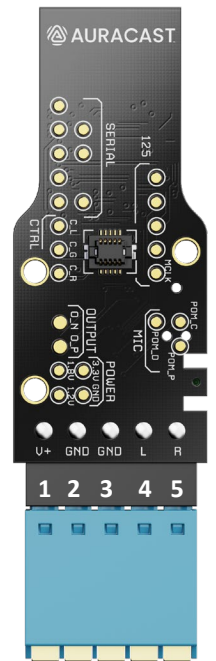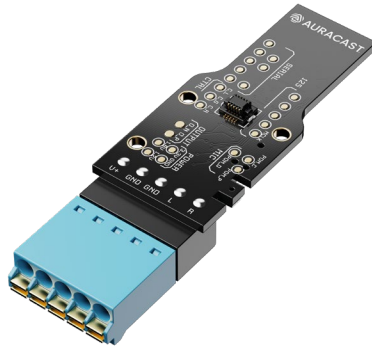

1	+ 5V
2	GND
3	GND
4	Left side audio
5	Right side audio