




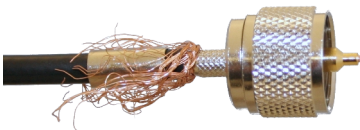
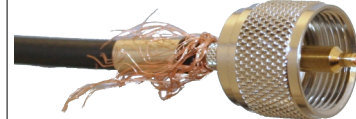


# Mounting instruction



## Ecoflex<sup>®</sup> 5

UHF plug crimp / Item no.: 7762-E

[www.ssb-electronic.com](http://www.ssb-electronic.com)

Required tools:			
1 x cutter knife			
1 x scissors			
1 x crimping tool			
1 x crimp insert HEX .255" (6,47 mm)			
1 x soldering station + solder			
1		Cut off cable tail right-angled.	
2		Slide the crimp sleeve over the end of the cable. Remove 27 mm of the outer jacket with the cutter knife.	
3		Bend the copper braid up at a right angle. Score and remove 22 mm of the copper foil and 5 mm of the foamed dielectric.	
4		Insert the prepared cable end into the connector housing as far as it will go. Caution: the copper foil must fit tightly against the insulator so that the cable end can be inserted into the connector housing.	
5		Solder the inner pin at the tip to the conductor.	
6		Cut off the copper braid with the scissors and push the crimp sleeve forward.	
7		Crimp the crimp sleeve with the crimping pliers. This clamps the copper braid between the connector housing and the crimp sleeve.	