




## INLINE® HDMI AOC CABLE

### Ultra High Speed HDMI, 8K4K, detachable plug

- Active optical HDMI 2.1 cable
- Detachable HDMI A plug and HDMI D plug for easy installation through narrow cable ducts
- 4-in-1 solution applicable:
  - HDMI-D to HDMI-D
  - HDMI-D to HDMI-A
  - HDMI-A to HDMI-A
  - HDMI-A to HDMI-D
- Hybrid cable consisting of 4 glass fibre and 7 solid copper strands
- Directional signal cable: HDMI plug (source) to HDMI plug (display)
- Robust metal connectors, aramid-protected and PVC-coated cable
- Max. Data transfer rate: 48 Gb/s (12 Gb/s per channel)
- Supported resolutions: UHD-II 7680x4320/8K@60Hz - UHD-I 3840x2160/4K@120Hz
- Supports: 3D, HDCP, EDID, CEC, DDC, Dynamic HDR, eARC, ARC and other specifications according to HDMI
- Gold-plated contacts
- Cable diameter only 4.8mm
- Operating temperature: 0°C to +50°C
- Storage temperature: -20°C to +70°C

Item No.	Length	EAN
179100	10 m	4043718333707
179150	15 m	4043718333714
179200	20 m	4043718333721
179250	25 m	4043718333738
179300	30 m	4043718333745
179400	40 m	4043718333752
179500	50 m	4043718333769
179800	80 m	4043718333776

Technical Data	
Active cable:	Yes
Brand:	InLine®
Colour:	Black
Complies with HDMI standard:	HDMI 2.1
Gold plated contacts:	Yes
Maximum HDTV resolution:	7680x4320 @60Hz
Maximum display resolution:	7680x4320 @60Hz
Operation temperature:	0 to +50 °C
Outer diameter:	4.8 mm
Side A:	HDMI A plug
Side B:	HDMI A plug
Signal:	Audio/Video
Storage temperature:	-20 to +70 °C
Type:	HDMI 2.1
Type of packaging:	InLine® carton without Euro perforation
UL:	No
Variant:	AOC cable
Wire size:	AWG 30

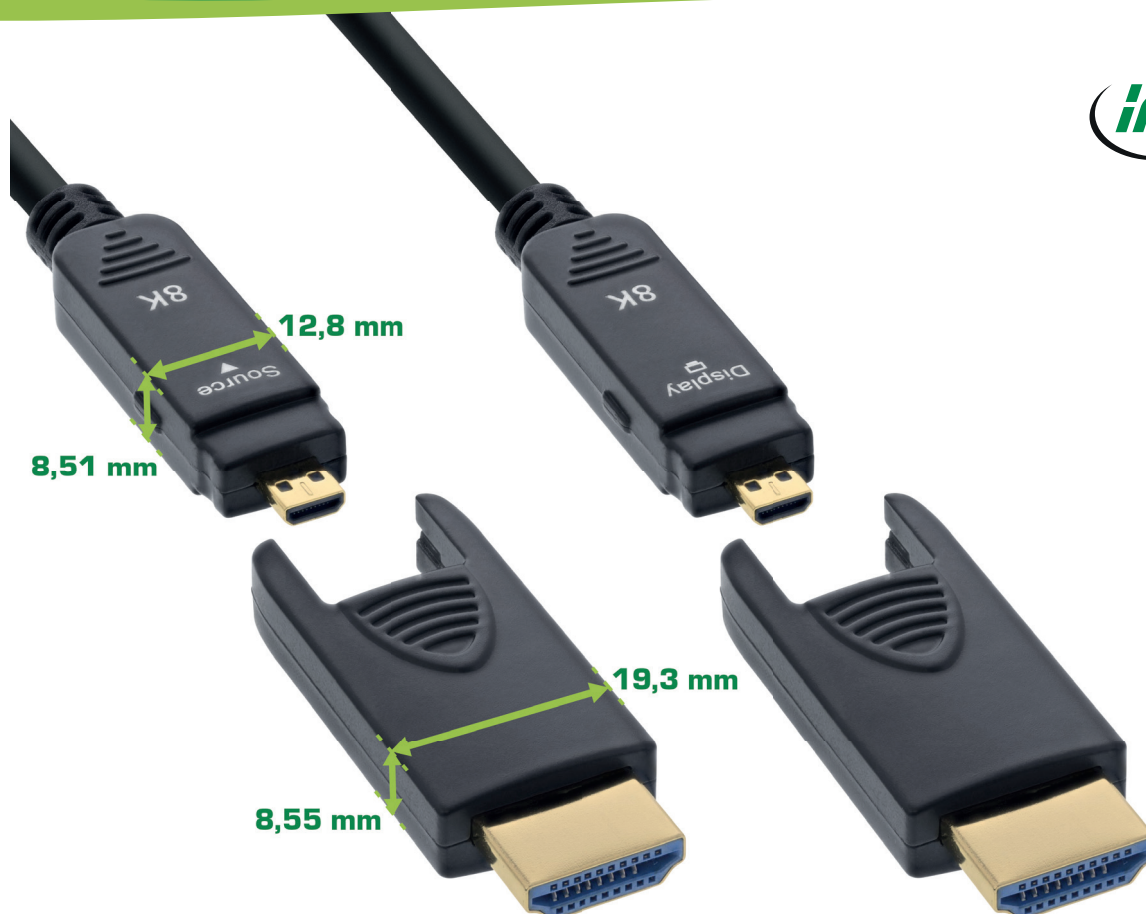

### HDMI 2.1:

This InLine HDMI 2.1 specification cable supports 8K video transmission at up to 60 frames per second or 4K at up to 120 frames per second. The even higher resolution enables, among other things, smoother gameplay and the reduction of motion blur, faster transmission of frames and lower latency as well as seamless switching between different video sources. The Enhanced Audio Return Channel (eARC) supports the transmission of lossless high-definition audio. This makes the InLine HDMI cable particularly suitable for home cinema systems, professional video editing studios or digital signage systems to reproduce content with outstanding detail and clarity.

### Home cinema:

Connect your 8K home cinema components such as projectors, TVs, AV receivers and streaming boxes with the InLine HDMI cable and benefit not only from a higher resolution and more bandwidth, but also from uncompressed, high-resolution audio formats such as Dolby TrueHD and DTS-HD Master Audio for an immersive visual and acoustic cinema experience within your own four walls.

### Gaming:

For gaming enthusiasts, the InLine cable offers the opportunity to experience games in impressive 8K resolution with incredibly clear graphics and smoother frame rates. This is particularly relevant for state-of-the-art PC gaming setups or gaming consoles such as the PlayStation 5 or Xbox Series X.

### Business:

In professional production environments, such as film or graphic design studios, the InLine HDMI cable can be used to edit and play back high-resolution video and image content in real time. This enables precise colour reproduction and detail for demanding production requirements. In business environments, the InLine HDMI cable can be used to transmit presentations, graphics and multimedia content in 8K resolution to provide an impressive and high-quality visual display at conferences, meetings or events.

### Streaming:

Users can enjoy content from 8K-capable streaming devices such as streaming players, IPTV receivers or media PCs in impressive 8K quality on their screens with the InLine HDMI cable.


### AOC

The InLine AOC HDMI cable is an active optical cable (AOC), i.e. it combines copper cables with fibre optic strands and thus combines the advantages of both transmission technologies. This reliable and high-performance solution is particularly suitable for high-quality audio and video transmissions over long distances and in demanding environments, e.g. for conference technology or digital signage. Thanks to the optical fibres inside the cable, the InLine AOC cable can bridge longer distances with less weight and greater flexibility without loss. This makes handling and installation easier compared to pure, often rigid copper cables. In addition, such a connection is less susceptible to electromagnetic interference.

Compared to pure fibre optic cables, the InLine AOC cable is more robust and less susceptible to damage. In addition, no external power supply is required to convert the light signal into an electrical signal. This means that the InLine AOC cable is often more compatible with HDMI devices than purely optical cables. The active electronic components can also additionally amplify the signal and improve transmission properties.

### GOLD-PLATED CONTACTS

The gold-plated plugs improve the conductivity, durability and corrosion resistance of the InLine HDMI cable. The risk of oxidation or corrosion is significantly reduced. This increases the long-term reliability of the connection, e.g. even in environments with higher humidity. Gold-plated contacts adapt better to the connections and are less susceptible to abrasion and damage when plugging and unplugging. In addition, the higher conductivity can improve signal transmission and therefore picture and sound quality, especially over longer cable runs.

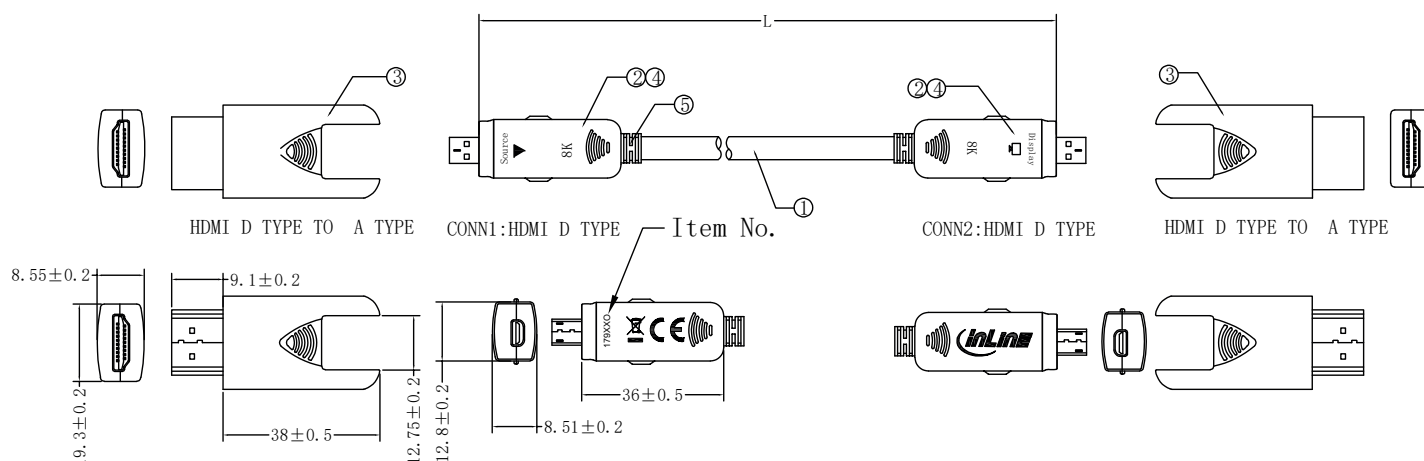

5	TUBE END	PVC Black	2
4	HOUSING	Zinc alloy BLACK	2
3	HDMI2.1 D ADAPTER	HDMI2.1 D TYPE FEMALE TO A TYPE MALE	2
2	CONNECTOR	HDMI2.1 D MALE, The Pin Gold Plated, The Shell Gold Plating	2
1	CABLE	4C (50/125)+30AWG*2C+30AWG*2C+30AWG*2C+30AWG*1C+D+F+AL Black PVC OD:4.80±0.2mm	L±T
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y

#### NOTE:

- Bandwith up to 48 Gbps
- Resolution:7680×4320@60Hz , 4096\*2160@60Hz
- Also supports resolution:4K@120Hz 4K@60Hz
- 3D/HDCP2.3/DPCP1.0/EDID/HDR10/DSC1.2/8PCM/ Dolby Digital/DTS/MPEG/DVD-Audio/SACD/Dolby Digital Plus/True HD/dts-HD
- Dynamic HDR formats is supported.
- Support eARC (MAX 50M)
- Round cable Black PVC jacket OD:4.8mm±0.20
- Operation temperature : 0℃~+50℃
- Storage temperature : -20℃~+70℃
- CE EMC certificate
- RoHS 2011/65/EU and amendment directives (EU) 2015/863 compliant;REACH 1907/2006/EC compliant.

If you have any further questions, please contact [marketing@inline-info.com](mailto:marketing@inline-info.com)

[www.inline-info.com/en/](http://www.inline-info.com/en/)

#### Disclaimer

InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

#### Documentation © 2024 INTOS ELECTRONIC AG

All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher.

It is possible that this document may still contain typographical faults or misprints.

However, the information in this document will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.

Please keep away from children.