

ANTENNAS | OMNI-707 SERIES

OMNI-DIRECTIONAL, DUAL-PORT WI-FI ANTENNA

2400 – 2500 MHz, 5000 – 6000 MHz, 5.5 dBi



Rural/Farm



Industrial



Mining



Tunnelling

APPLICATION AREAS

- Medium gain, omni-directional Wi-Fi antenna
- Suitable for 2.4 GHz and 5 GHz Wi-Fi deployment
- Compliant with IEEE 802.11b/g/n and 802.11ac wireless standard
- Dual-port configuration to connect multiple Wi-Fi ports
- Ideal for IoT and M2M applications
- Rugged and low-profile design
- High pressure water and dust ingress protected enclosure (IP 69K)

Product Overview

The OMNI-707 is an omni-directional, dual port Wi-Fi antenna, developed by Poynting Antennas. The OMNI-707 forms part of our new “Rhyno” antenna range, making it rugged and ideal for harsh environments. The antenna offers two dedicated ports for 2.4 GHz and 5 to 6 GHz, respectively, covering the Wi-Fi bands with a peak gain of 5.5dBi. This offers improved performance with a reliable connection. The antenna was designed with superior pattern control over the entire frequency bands of operation.

The OMNI-707 antenna can be connected to any Wi-Fi access point, whether it is older Wi-Fi technology or new dual band Wi-Fi technology. The antenna can be used to resolve channel saturation and provide the ultimate in Wi-Fi performance and flexibility. The antenna can also be used for point-to-point links where there is abundance of RF noise and cluttered environments. The rugged enclosure design offers protection in adverse environmental conditions with an IP 69K and IK 10 rating. The antenna comes with two 0.3 m pigtail N-Type female connectors, which can then be connected to a cable of the desired type and length.

Features

- Dual port 2.4 GHz and 5 GHz Wi-Fi antenna
- Omni-directional antenna with medium to high gain
- Dual port to connect to separate W-Fi ports
- Easy installation, pole- or wall mountable
- High pressure water and dust proof enclosure (IP 69K)

Application Areas


- Smart Utilities: Smart Power Metering, Gas & Water Metering
- Smart Buildings: Climate control, access control, security, irrigation
- Smart Environmental & Water Systems
- Industrial factory automation and M2M systems



OMNI-707

Frequency Bands

The OMNI-707 is an omni-directional antenna that works from | 2400 – 2500 MHz | and | 5000 – 6000 MHz |

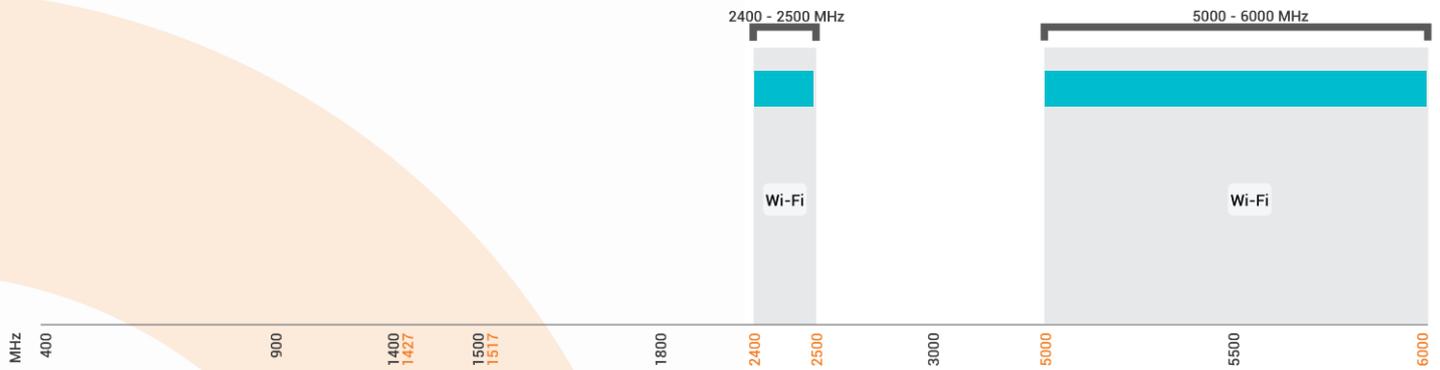

 Indicates the WI-FI bands on which OMNI-707 works

Antenna Overview

	
Ports	2
SISO / MIMO	SISO
Frequency Bands	2400 – 2500 MHz 5000 – 6000 MHz
Polarisation	Linear Vertical
Peak Gain	5.5 dBi
Coax Cable Type	RG-58
Coax Cable Length	300 mm
Connector Type	N-Type (F)

*The coax cable & connector are factory mounted to the antenna

Electrical Specifications

Frequency Bands:	2400 – 2500 MHz 5000 – 6000 MHz
Gain (Max):	5 dBi @ 2400 – 2500 MHz 5.5 dBi @ 5000 – 6000 MHz
VSWR:	<1.5:1
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax Cable Loss:	0.86 dB/m @ 2400 MHz 2.1 dB/m @ 5800 MHz
DC Short:	Yes

Product Box Contents

Antenna:	A-OMNI-0707
Mounting Bracket:	Included L-Bracket and adhesive disc

Ordering Information

Commercial Name:	OMNI-0707
Order Product Code:	A-OMNI-0707-V1-01
EAN Number:	6009710923344

Mechanical Specifications

Product Dimensions	306 mm x Ø70 mm
Packaged Dimensions	386 mm x 80 mm x 96 mm
Weight	0.34 kg
Packaged Weight	0.625 kg
Radome Material:	UV Stable ASA
Radome Colour:	Grey Pantone 429C
Mounting Type:	Pole, Wall and Surface Mounted


Environmental Specifications, Certification & Approvals

Wind Survival:	≤190 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP 69K
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 10
Product Safety & Environmental:	Complies with CE and RoHS standards



Antenna Performance Plots

VSWR

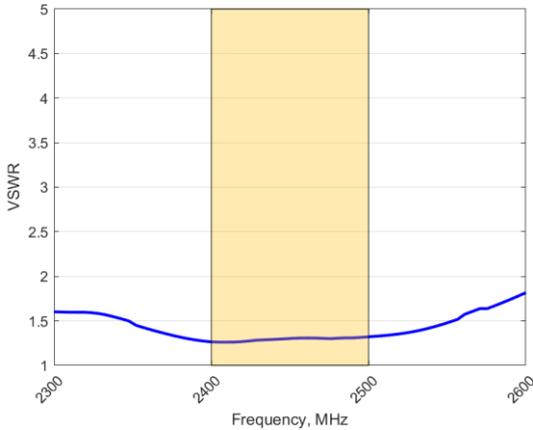


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-707 delivers superior performance across all bands with a VSWR of <1.5:1.

**VSWR measured without a cable*

VSWR

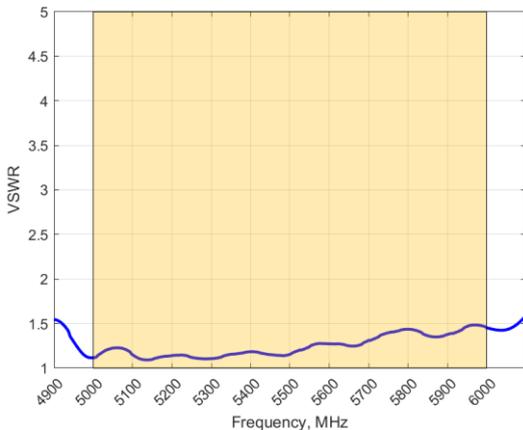


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-707 delivers superior performance across all bands with a VSWR of <1.5:1.

**VSWR measured without a cable*

GAIN (EXCLUDING CABLE LOSS)

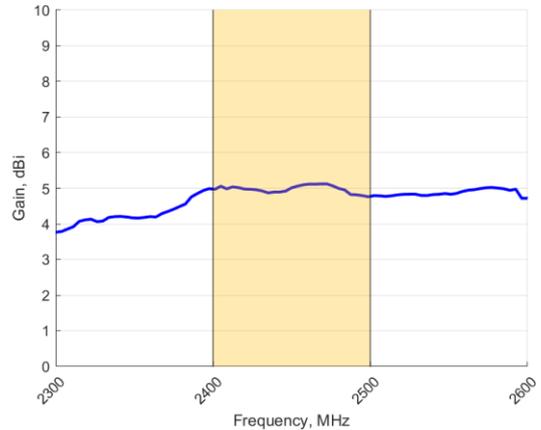


Gain* in dBi

5 dBi is the peak gain across all bands from 2400 – 2500 MHz

Gain @ 2400 – 2500 MHz: 5 dBi

**Antenna gain measured with polarisation aligned standard antenna*

GAIN (EXCLUDING CABLE LOSS)

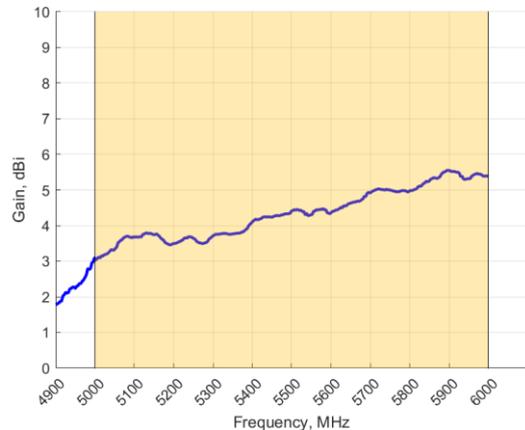


Gain* in dBi

5.5 dBi is the peak gain across all bands from 5000 – 6000 MHz

Gain @ 5000 – 6000 MHz: 5.5 dBi


**Antenna gain measured with polarisation aligned standard antenna*

Technical Drawings

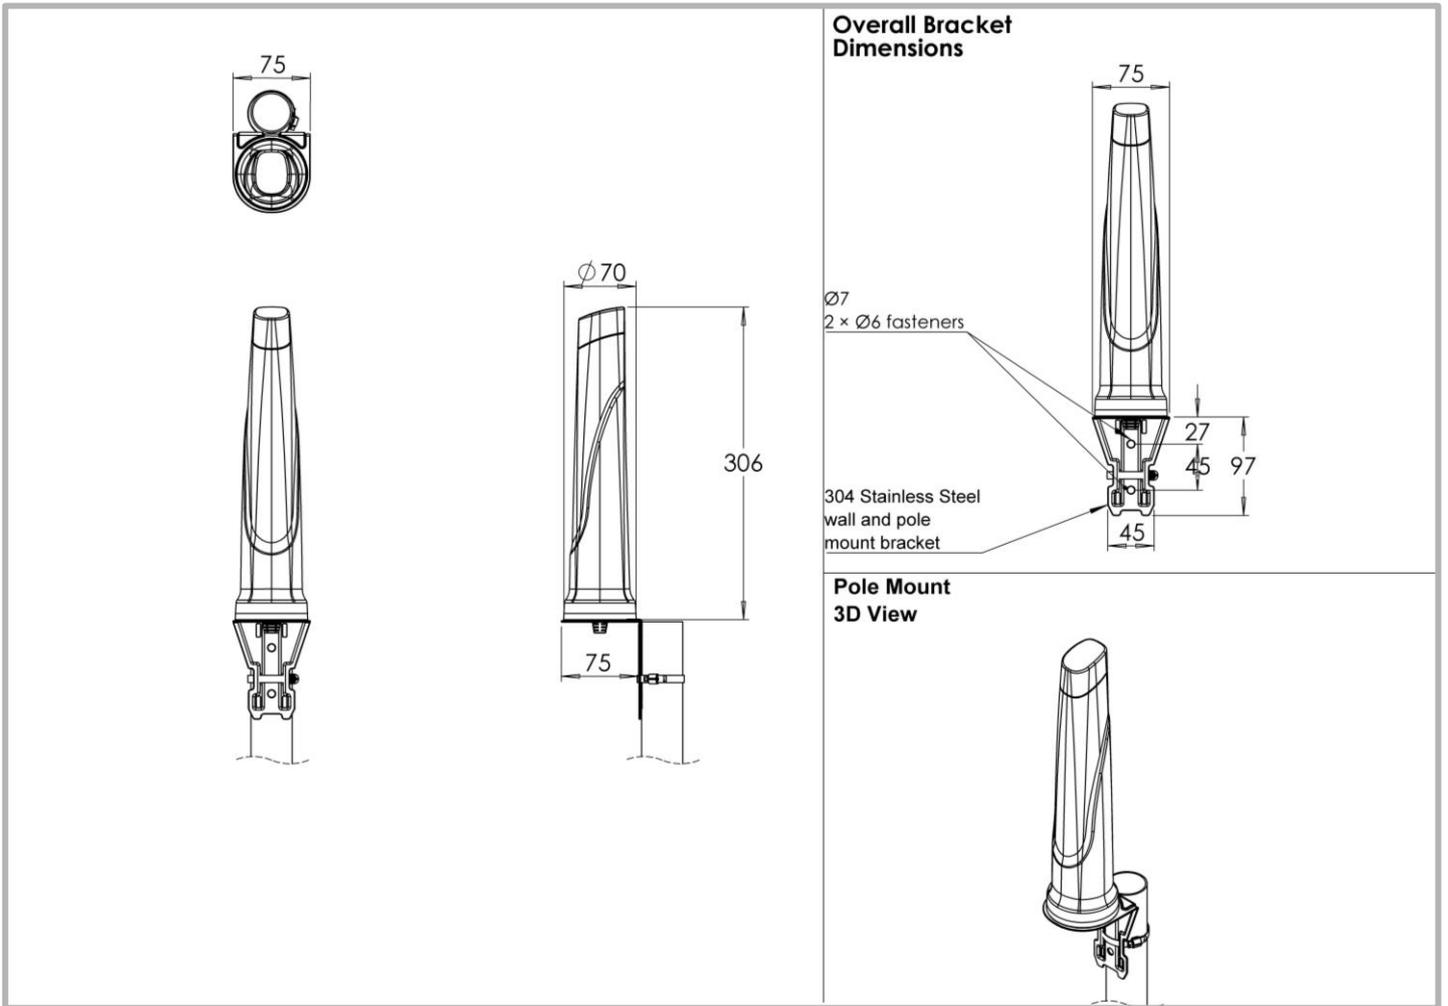


Radiation Patterns


Azimuth: 2400 – 2500 MHz

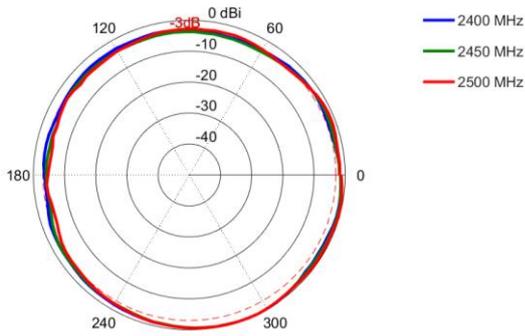


Azimuth: 5000 – 6000 MHz

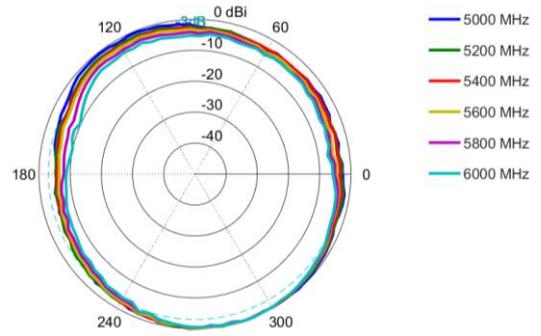


Elevation: 2400 – 2500 MHz

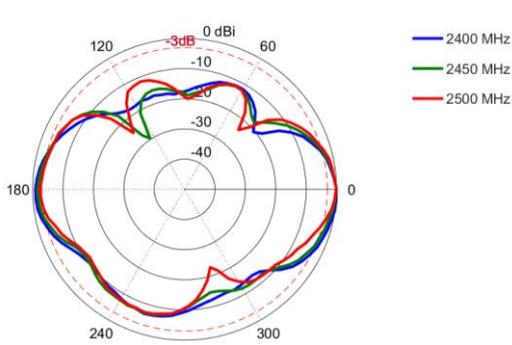

Elevation: 5000 – 6000 MHz

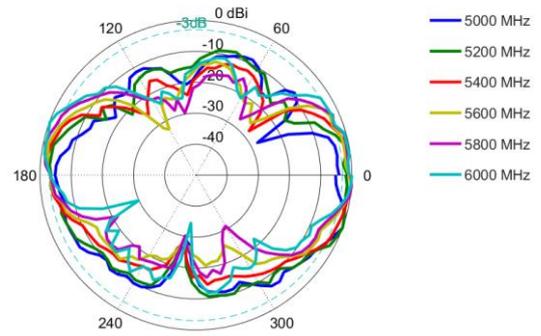


Mounting Options

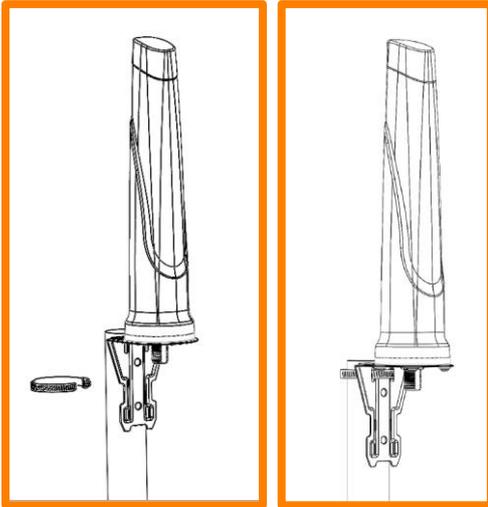


Pole Mount

Pole mounted using included L-Bracket and cable clamp

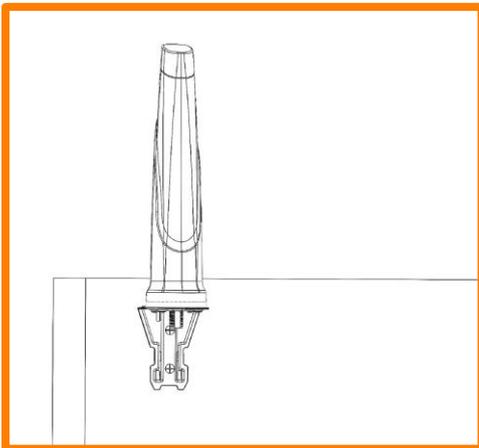

Wall Mount

Wall/Cabinet mounted using included L-Bracket

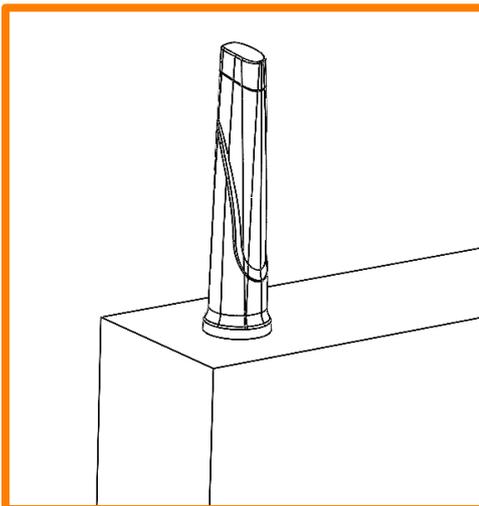

Surface Mount

Surface mounted using included adhesive disc

Additional Accessories

See accessories technical specifications on www.poynting.tech



CONTACT POYNTING

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050

E-mail: info@poynting.tech

International Email: sales-global@poynting.tech

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech