

## **USB-C Multiport Dock with Power Pass-Through**UH3234

• The ATEN UH3234 USB-C Ultra-Slim Multiport Dock is an ultra-sleek, one-step total upgrade for your laptop that provides all the extra expansion capabilities that you need. Simply use one cable to add up to 10 devices, with power delivery pass-through to boost your productivity with extra HDMI, DisplayPort, VGA, USB 3.1 Gen 1, SD/MMC/MicroSD, Ethernet and Audio connectivity

With Power Delivery Pass-Through up to 60W, UH3234 can charge your laptop while connected to the docking station. The UH3234 provides power to matched USB-C Windows or Mac laptops with PD Profile specifications of 20V/ 3A, 12V/3A, 9V/3A and 5V/3A.

Enjoy stunning 4K video or a dual HD monitor setup with HDMI, VGA, and DisplayPort functionality. The UH3234 routes video from a source computer to a DisplayPort or HDMI monitor via a single cable while maintaining the highest quality 4K resolution. You can also mirror or extend your Windows USB-C laptop to two monitors in 1080P.

This ergonomic, plug-and-play device (no software drivers are needed) is compatible with all major operating systems (Windows and OS X). Save space on your desktop by placing your laptop directly on top of the lightweight yet rugged docking station or display the dock next to your monitors for a stylish, minimalist workstation.




















## Features

- Connects up to 10 devices instantly through a USB-C cable.
- Provides Power Delivery Pass-through up to 60W after deduction of 15W used by the dock\*
- Supported power profiles include 20V/3A, 12V/3A, 9V/3A and 5V/3A power specification
- Supports 4K resolution on a single HDMI or DisplayPort display, and Dual 1080p on a DisplayPort and an HDMI or VGA\*\* monitor.
- 1 x USB 3.1 Gen 1 Type A port supports Battery Charging Specification Revision 1.2 (BC 1.2) for Fast-Charging device.
- Built-in memory card readers (SD/MMC/Micro SD)\*\*\*
- Gigabit Ethernet
- Stylish and ultra slim docking station
- Enhanced EMI protection by increasing the cable braid density and adding conductive foam
- \*Power Delivery Pass-Through requires original USB-C charger from laptop.
- \*\*1. For video output to work through a USB-C port, it must support DP Alt Mode. For Dual-View to work, a computer's graphics card must support MST technology.

  2. Mac computers only support single-view output.
- \*\*\*SD and Micro SD Card cannot be used at the same time; functionality accords to the order of insertion.

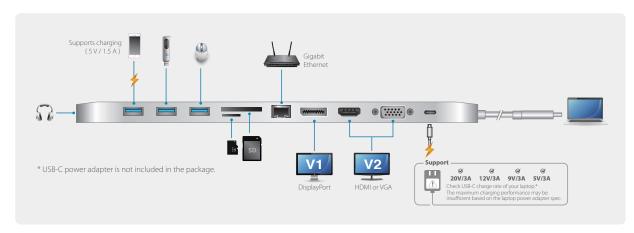

## **Specifications**

Function	UH3234
Computer Connections	1
Connectors	
Computer	1 x USB-C Male
Device	1 x USB 3.1 Gen1 Type A Female with BC1.2*
	2 x USB 3.1 Gen1 Type A Female*
	*The total output of 3 x USB 3.1 Gen1 Type A Female is 10W (5V/2A).
Video Output	1 x DisplayPort Female; 1 x HDMI Female; 1 x VGA Female
LAN Ports	1 x Gigabit Ethernet Female
Audio	1 x 3.5mm stereo 4-pole microphone and headphone jack
Power	1 x USB-C Female; Power Delivery Pass-Through up to 60W
Performance	
Flash Memory	1 x SD/SDHC/SDXC card slot
	1 x Micro SD/SDHC/SDXC (up to 128 GB) card slot
Video Resolution	Single View: DisplayPort - 3840 x 2160 @ 30; HDMI - 3840 x 2160 @ 30 or VGA - 1920 x 1200 @ 60
	Dual View: DisplayPort/HDMI - 1920 x 1080 @ 60; DisplayPort/VGA - 1920 x 1080 @ 60
Power Consumption	DC 5V, 15W
Environmental	
Operating Temperature	0° to 40° C (32° to 122° F)
Storage Temperature	-10° to 70° C (-4° F to 158° F)
Humidity	10 - 90% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.315 kg
Dimensions (L x W x H)	28.00 x 7.50 x 1.45 cm

Product information is subject to change without prior notice.

Publish Date: 06/2018 V2.0

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

