

REVISIONS	
ISS	DESCRIPTION / PER REQUEST / DATE

SC RoHS Compliant

- NOTE:
- 1


Impedance : 50 Ω
- 2

Frequency range : 0 - 6 GHz
- 3






Durability(Matings) : 100 min
- 4

Plastic housing retention force : ≥ 110N
- 5

Temperature range : -40°C / +105°C



RECOMMENDED
CABLE STRIPPING DIM'S

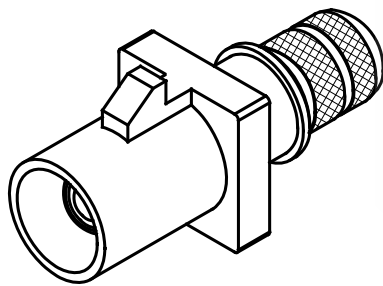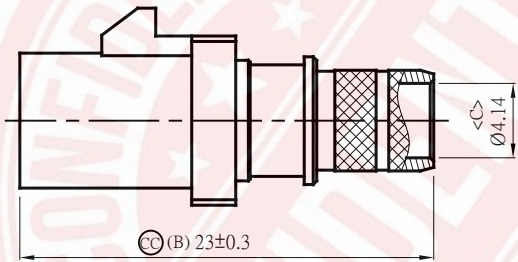

1. RECOMMENDED CRIMPED FERRULE
HEX. CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ANGLES : ± 3° UP TO 6 : ± 0.1 6~40 : ± 0.2 40~120 : ± 0.6 120~135 : ± 1.0 ABOVE 135 : ± 1.6 UNITSmm SCALE1 / 1 3rd ANGLE PROJECTION	APPROVED SHELDON		DATE 10-03-23'		AIMMET INDUSTRIAL CO., LTD.		
	CHECKED JERRY		DATE 10-03-23'		TITLE FAKRA SMB ST. M. CRIMP (Z CODE) (FOR H155, 240 SERIES CABLE)		
	DRAWN LUN		DATE 12-15-22'		DRAWING NO. 3602NTG40Z1	REV	A1
	NO.		DESCRIPTION		CUSTOMER NO.		REV
6	WASHER	COPPER	NICKEL	1	FILE NO. 1303602NTG40Z0101		3602CPC01
5	FERRULE	COPPER	NICKEL	1			
4	PIN	COPPER	GOLD	1			
3	SHELL	PA66	WATERBLUE (SIM.)	1			
2	INSULATOR	PTFE	WHITE	1			
1	BODY	COPPER	NICKEL	1			
NO.		DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	