DMM-7-38 Range



Desk Mount Antenna

Supports MiMo & diversity across 2G/3G/4G/5G Two omni-directional ultra wideband elements Fold out feet for desk mounting Optional suction mount

The DMM antenna provides an innovative and future proof solution for 2G / 3G / 4G and 3.5GHz 5G networks. Incorporating two separately fed ultra wideband elements in a single housing the DMM is equipped to provide portable MiMo and diversity support for the networks of today and tomorrow.


The DMM is highly portable and features desk mount feet which fold out for use, and flat for transport. A handy suction window mount enables users to optimise their signal in multiple locations, with instant installation and easy removal.

The product is supplied with up to 2 metres (6') of cable and a variety of connectors are available.

The DMM is an cost effective value added product for network operators and service providers ensuring a stable link with improved data rates for subscribers thereby improving satisfaction and retention.

Technical Drawing

DMM-7-38 Range Shown

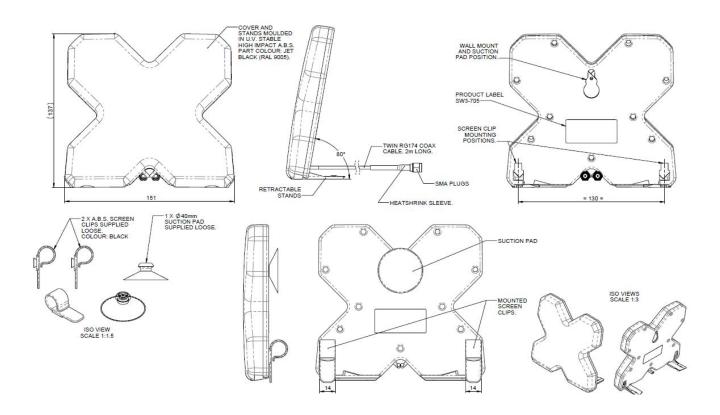



5G/4G/3G/2G MiMo Desk Mount Antenna



DMM-7-38 Range

					Product Data	
Part No.						
		DMM-7-38-2SP	DMM-7-38-2RPSP	DMM-7-38-2TS9	DMM-7-38-2CRC9	
Electrical Data						
Frequency Range (MHz)	Antenna 1	698-960 / 1710-3800				
	Antenna 2	698-960 / 1710-3800				
Operational Bands		2G / 3G / 4G / 5G				
Radiation Pattern		Omni-directional				
Typical VSWR		< 2.5:1				
Peak Gain - excluding cable loss (all bands)	698-960MHz	2.5dBi				
	1710-2170MHz	5dBi				
	2.2-3.8GHz	4dBi				
Efficiency - excluding cable loss (all bands)	698-960MHz	> 60%				
	1710-2170MHz	> 80%				
	2.2-3.8GHz	> 50%				
Correlation Co-efficient (all bands)		< 0.1				
Element Isolation		> 18dB				
Max Input Power (W)		20 Watts				
Impedance		50Ω				
Mechanical Data						
Dimensions (mm)	Height	137 (5.4")				
	Width	151 (5.94")				
Operating Temp (°C)		-40° / +80°C (-40° /180°F)				
Material		U.V. Stabilised ABS				
Colour		RAL9005 (Jet Black)				
Weight			250g			
Mounting Data						
				n clip window mount		
Cable Data						
Гуре			2 x RG174			
Diameter (mm)			2.8 (0.1")			
_ength (m)		0 0844 ()	2 (6.		0 th ODOO (**)	
Termination		2 × SMA (m)	2x Rev Pol SMA Plugs	2 × TS9 (m)	2 × CRC9 (m)	

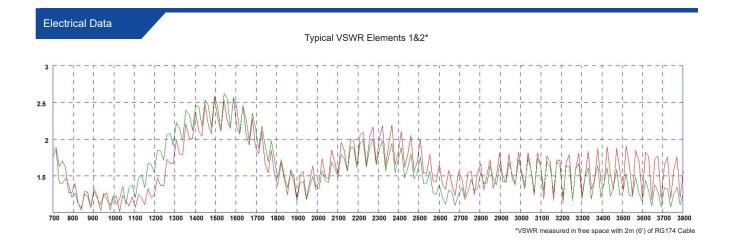

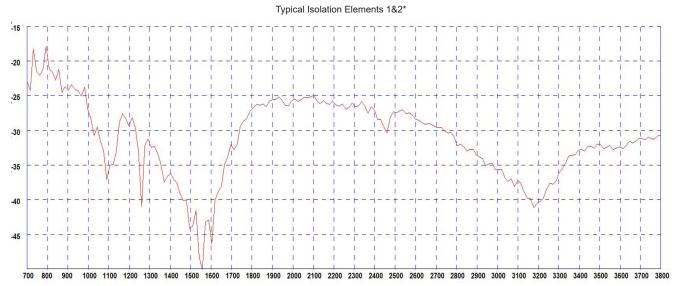

*Isolation measured in free space with 2m (6') of RG174 Cable