

QuSector 7V-120-6 Wi-Fi 6E

QuSector 7V-120-6 offers a 120 degrees, 7dBi signal gain. It is a perfect indoor and outdoor device for industrial installations. Wi-Fi 6E support!

QuSector 7V-120-6 is a concurrent triple band, Vertical polarity, panel antenna.It operates at **2.4GHz, 5GHz and 7GHz simultaneously with 7dBi** gain. It is a future proof solution with Wi-Fi 6E support.

Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure is characterized by a wide range of applications: from indoor through mobile devices to the outdoor (IP68) ones. Wide frequency range (2.4-2.5GHz & 5.0-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes in three versions: with 6*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC connectors.

















(*WI-FI ANTENNA SPECIFICATION

| FREQUENCY | 2.4 - 2.5 GHz 5.0 - 7.125 GHz |
|-------------------------------|--|
| GAIN | 2.4 - 2.5 GHz: 7 dBi 5.0 - 7.125 GHz: 7 dBi |
| VSWR | <1.80 |
| BEAMWIDTH | 120°/60° 120°/90° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |
| SEPARATION BETWEEN CONNECTORS | >30dB |
| FRONT-TO-BACK | 20dB |
| MAX INPUT POWER | 50W |
| DC GROUND | Yes |

(MOUNTING KIT

| MATERIAL | Galvanized |
|----------------|---------------------------|
| WEIGHT | 0.87 kg |
| MOUNTING PLACE | Mast |
| MAST DIAMETER | 25-66mm 0.98-2.60 inch |



(* MECHANICAL SPECIFICATION

MATERIAL ABS

CONNECTOR 6xRPSMA/6xNM/6xRPTNC

OUTER DIMENSIONS 272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch

WEIGHT 1.8 kg

OPERATING TEMPERATURE

-40°C to +80°C
-40°F to 176°F

(* COMPATIBLE ROUTERS

VARIANT: S7V,120,6RS

ACKSYS AirBox/12

ADTRAN Bluesocket 1935, Bluesocket 2035

AEROHIVE NETWORKS AP245X

ARISTA C-130E, C-230E

ARUBA AP-228, AP-318, AP-518

DAP-2695

EXTREME NETWORKS AP410e

FORTINET AP832E, FAP-243K, FAP-U323EV

HUAWEI AP7110DN-AGN

JUNIPER NETWORKS AP43E



| ΧI | | |
|----|--|--|
| | | |
| | | |
| | | |

XA4-240

VARIANT: S7V.120.6NM

| ₽.₩ | n I | KS | 37/ | ~ |
|-----|-----|----|-----|----------|
| | | | | |
| | | | | |

RailTrack

ADTRAN

Bluesocket 1940

ALCATEL-LUCENT

Stellar AP1362

ARISTA

0-235E

ARUBA

AP-274, IAP-274

CISCO

AIR-CAP1552EU, AIR-CAP1552H, AIR-CAP1552WU, Catalyst 9124AXE

ENGENIUS

EWS860AP

EXTREME NETWORKS

AP 3865E, AP 7562

FORTINET

FAP-432F, FAP-432FR, FAP-S322C, FAP-S322CR, OAP832E

HUAWEI

AP8130DN, AP8130DN-W

JUNIPER NETWORKS

AP63E

MIST

AP63E

SIEMENS

6GK5788-2GD00-0AA0, 6GK5788-2GD00-0AB0, 6GK5788-2GD00-0TA0, 6GK5788-2GD00-0TB0

ZYXEL


WAX655E (AX5400)

VARIANT: S7V.120.6RT




(* PLOTS

VSWR —

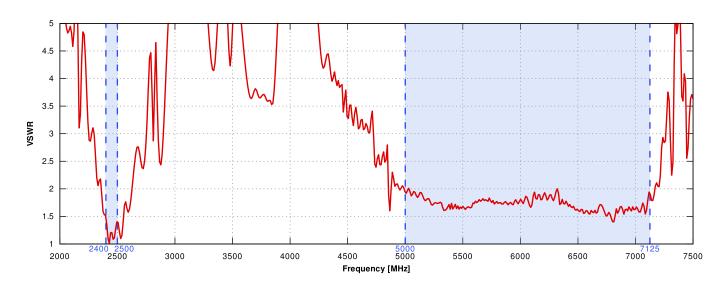


Gain ———

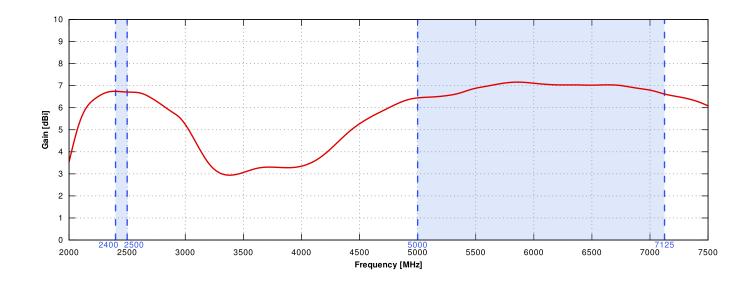




From 2.4GHz to 2.5GHz

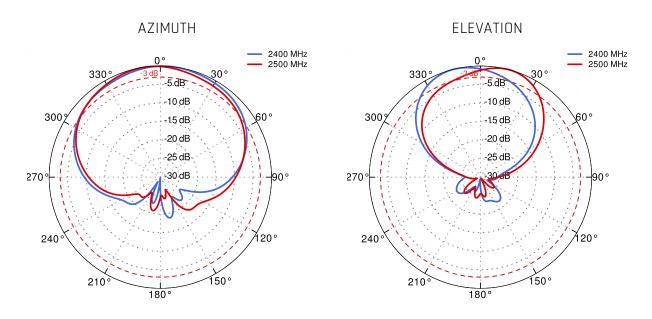



From 5.1GHz to 6.9GHz

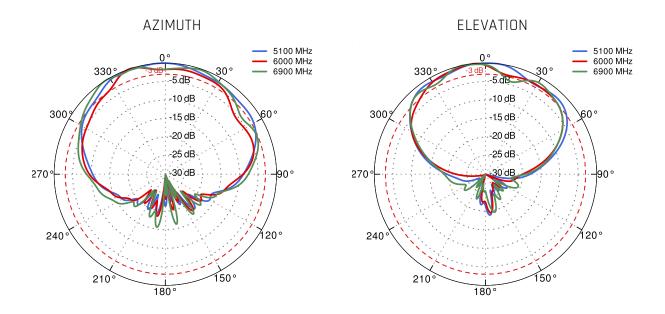



(* DIMENSIONS

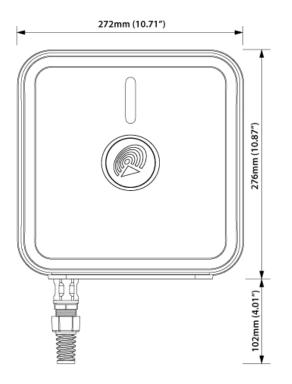

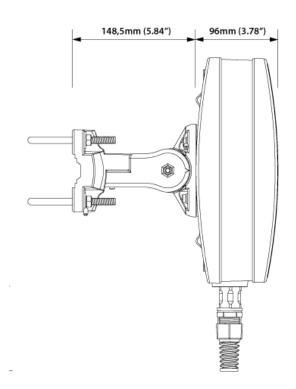



WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com

Support email: support@quwireless.com **Website:** www.quwireless.com

Tel: +48 513 900 416

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland



