AIMMET INDUSTRIAL CO., LTD.
密 件
CONFIDENTIAL

REVISIONS	
ISS	DESCRIPTION / PER REQUEST / DATE

(SC) RoHS Compliant

NOTE:

1. Impedance : 50 Ω
2. Frequency range : 0 - 6 GHz
3. Durability(Matings) : 100 min
4. Plastic housing retention force : ≧ 110N
5. Temperature range : -40˚C / +105˚C



RECOMMENDED
CABLE STRIPPING DIM'S

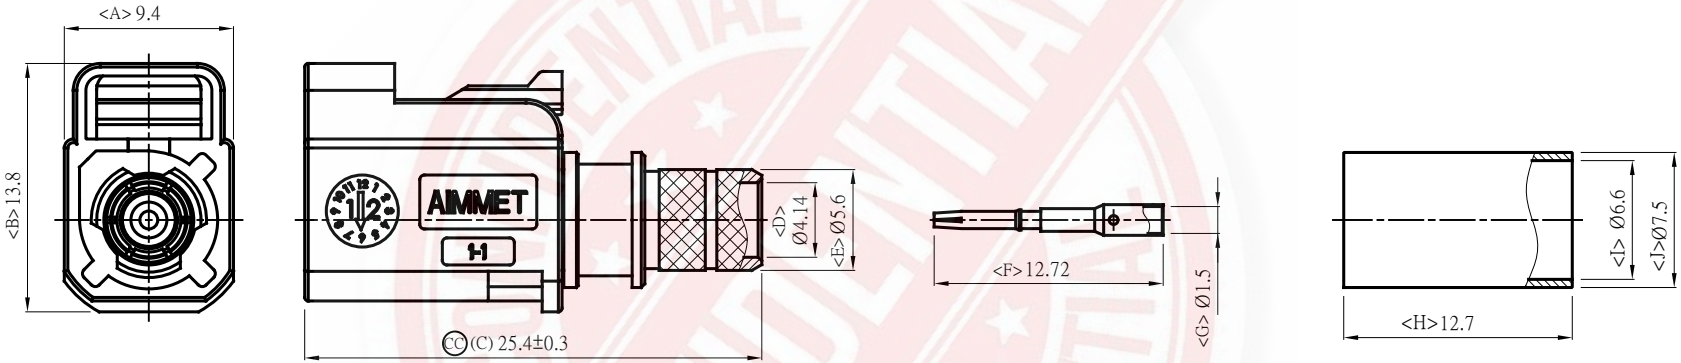



1. RECOMMENDED CRIMPED FERRULE HEX. CRIMP SIZE .256"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
6	RING	BeCu	NONE	1	
5	FERRULE	COPPER	NICKEL	1	
4	PIN	P.B.	GOLD	1	
3	SHELL	PA66	WATERBLUE (SIM.)	1	
2	INSULATOR	PTFE	WHITE	1	
1	BODY	COPPER	NICKEL	1	

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISSE SPECIFIED TOLERANCES
ANGLES : ± 3°
UP TO 6 : ± 0.1
6~40 : ± 0.2
40~120 : ± 0.6
120~135 : ± 1.0
ABOVE 135 : ± 1.6

UNITS	mm
SCALE	1 / 1
3rd ANGLE PROJECTION	

APPROVED	SHELDON	DATE	04-24-24'
CHECKED	WEN	DATE	04-24-24'
DRAWN	JERRY	DATE	04-24-24'

AIMMET INDUSTRIAL CO., LTD.

TITLE FAKRA SMB ST. F. CRIMP (Z CODE) (FOR H155, 240 SERIES CABLE)

DRAWING NO.	3601NTG40Z1	REV	A
CUSTOMER NO.		REV	
FILE NO.	1303601NTG40Z0101		3659CPC01

AIMMET EXECUTED+(實施中)