

4X4 MiMo 4G/5G

IOT Antenna

L[X]A[X]M4-7-42[-X]



Low Profile IOT Antenna

4x4 MiMo 698-960/1427-4200MHz

Up to 4x4 MiMo WiFi 6e (Optional)

GPS/GNSS L1/L5 or L1 only 30dB / 26dB LNA (Optional)

Meets IK10 and IP69K

The L[X]A[X]M4-7-42[-X] MiMo antenna is designed to be a one size fits all solution for IOT applications. The robust low profile housing contains 4x 4G LTE / 5G NR elements covering 698-960/1427-4200MHz. Versions of the product also contain up to 4x optional WiFi elements supporting WiFi 6e 2.4/5.150-7.125GHz and optional L1 only or L1/L5 GPS/GNSS.


The housing is constructed from robust, flame retardant, impact resistant plastic. The subtle, curved design makes the product harder to vandalise and the IK10 rating ensures that the product is suitable for use in tough environments and devices located in public areas. The housing is UV stable and approved to IP69K for ingress protection.

The product is supplied with integrated low loss flame retardant cables approved to UN ECE R118 and fitted connectors offer plug and play connectivity for a huge range of devices.

The L[X]A[X]M4-7-42[-X] can be installed on conductive or non-conductive panels without significant detriment to performance.

Technical Drawing

LG5ADM4-7-42 Shown

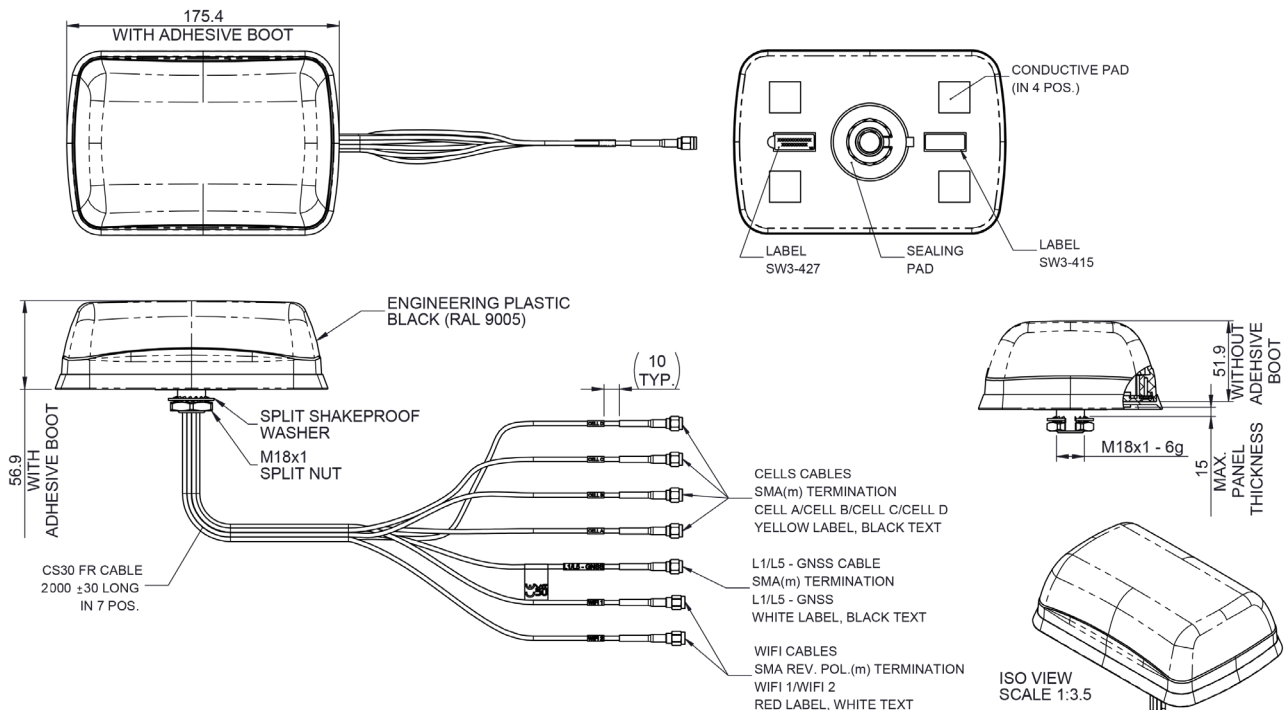

4X4 MiMo 4G/5G

IOT Antenna

L[X]A[X]M4-7-42[-X]

Product Data

Part No.		LGAQM4-7-42	LGADM4-7-42	LGAM4-742
Electrical Data				
Frequency Range (MHz)	Cell /LTE	4x 698-960 / 1427-4200		
	WiFi	4x 2396-7125	2x 2396-7125	-
	GPS/GNSS	1x 1559-1612		
Typical VSWR*	Cell Elements	<2.5:1		
	WiFi Elements	< 2:1		
Isolation**	Cell Elements	≥6dB (698-960MHz) / ≥12dB (1427-4200MHz)		
	Wifi Elements	>25dB (2.4-7.125GHz)		
Pattern	Omni-directional			
Impedance	50Ω			
Max Input Power (W)	5			
GPS/GNSS Data				
Frequency Range (MHz)	1559-1612			
Impedance	50Ω			
LNA Gain	26dB			
Voltage / Current	3-5v 17ma Typical			
Polarisation	Right Hand Circular			
Mechanical Data				
Dimensions (mm)	Height (unmounted)	56.9 (2.2")		
	Width	118 (4.64")		
	Length	175.4 (6.9")		
Environmental Specification				
Operating Temp (°C)	-40° / +85°C (-40° / +185°F)			
Radome Material	Lexan EXL 9330			
Radome Approvals	V0 (UL 94) / UL 746C (F1)			
Ingress Protection	IP69K			
Vandal Resistance	IK10			
Mounting Data				
Fixing	M18 (3/4") Mounting Bush			
Termination Data				
Cable Type	CS30 (Compliant to UN ECE R118)			
Cable Diameter (mm)	2.8 (0.1")			
Cable Length (m)	2m (6.6')			
Termination	4G/5G	4x SMA Plug (m)		
	WiFi	4x Reverse Polarity SMA Plug	2x Reverse Polarity SMA Plug	-
	GPS/GNSS	1x SMA Plug (m)		

*Across 90% of relevant bands when measured in free space with 0.5m (20") of CS30 cable **Worst case isolation measured for LGADM4-7-42 in free space with 0.5m (1.5') CS30 cable

4X4 MiMo 4G/5G

IOT Antenna

L[X]A[X]M4-7-42[-X]

Product Data

Part No.		LG5AQM4-7-42	LG5ADM4-7-42	LG5AM4-7-42
Electrical Data				
Frequency Range (MHz)	Cell /LTE	4x 698-960 / 1427-4200		
	WiFi	4x 2396-7125	2x 2396-7125	-
	GPS/GNSS	1x 1164-1189 / 1559-1612		
Typical VSWR*	Cell Elements	<2.5:1		
	WiFi Elements	< 2:1		-
Isolation**	Cell Elements	≥6dB (698-960MHz) / ≥12dB (1427-4200MHz)		
	Wifi Elements	>25dB (2.4-7.125GHz)		-
Pattern	Omni-directional			
Impedance	50Ω			
Max Input Power (W)	5			
GPS/GNSS Data				
Frequency Range (MHz)	1164-1189 / 1559-1612			
Impedance	50Ω			
LNA Gain	30dB / 26dB			
Voltage / Current	3-5v 37ma Typical			
Polarisation	Right Hand Circular			
Mechanical Data				
Dimensions (mm)	Height	56.9 (2.2")		
	Width	118 (4.64")		
	Length	175.4 (6.9")		
Environmental Specification				
Operating Temp (°C)	-40° / +85°C (-40° / +185°F)			
Radome Material	Lexan EXL 9330			
Radome Approvals	V0 (UL 94) / UL 746C (F1)			
Ingress Protection	IP69K			
Vandal Resistance	IK10			
Mounting Data				
Fixing	M18 (3/4") Mounting Bush			
Termination Data				
Cable Type	CS30 (Compliant to UN ECE R118)			
Cable Diameter (mm)	2.8 (0.1")			
Cable Length (m)	2m (6.6')			
Termination	4G/5G	4x SMA Plug (m)		
	WiFi	4x Reverse Polarity SMA Plug	2x Reverse Polarity SMA Plug	-
	GPS/GNSS	1x SMA Plug (m)		

*Across 90% of relevant bands when measured in free space with 0.5m (20") of CS30 cable **Worst case isolation measured for LGADM4-7-42 in free space with 0.5m (1.5') CS30 cable

Product Data

Part No.		LPAQM4-7-42	LPADM4-7-42	LPAM4-7-42
Electrical Data				
Frequency Range (MHz)	Cell /LTE	4x 698-960 / 1427-4200		
	WiFi	4x 2396-7125	2x 2396-7125	-
Typical VSWR*	Cell Elements	<2.5:1		
	WiFi Elements	< 2:1		
Isolation**	Cell Elements	≥6dB (698-960MHz) / ≥12dB (1427-4200MHz)		
	Wifi Elements	>25dB (2.4-7.125GHz)		
Pattern	Omni-directional			
Impedance	50Ω			
Max Input Power (W)	5			
Mechanical Data				
Dimensions (mm)	Height	56.9 (2.2")		
	Width	118 (4.64")		
	Length	175.4 (6.9")		
Environmental Specification				
Operating Temp (°C)	-40° / +85°C (-40° / +185°F)			
Radome Material	Lexan EXL 9330			
Radome Approvals	V0 (UL 94) / UL 746C (F1)			
Ingress Protection	IP69K			
Vandal Resistance	IK10			
Mounting Data				
Fixing	M18 (3/4") Mounting Bush			
Termination Data				
Cable Type	CS30 (Compliant to UN ECE R118)			
Cable Diameter (mm)	2.8 (0.1")			
Cable Length (m)	2m (6.6')			
Termination	4G/5G	4x SMA Plug (m)		
	WiFi	4x Reverse Polarity SMA Plug	2x Reverse Polarity SMA Plug	-


*Across 90% of relevant bands when measured in free space with 0.5m (20") of CS30 cable **Worst case isolation measured for LGADM4-7-42 in free space with 0.5m (1.5') CS30 cable


4X4 MiMo 4G/5G

IOT Antenna

L[X]A[X]M4-7-42[-X]


Electrical Data- Cell-
Free space

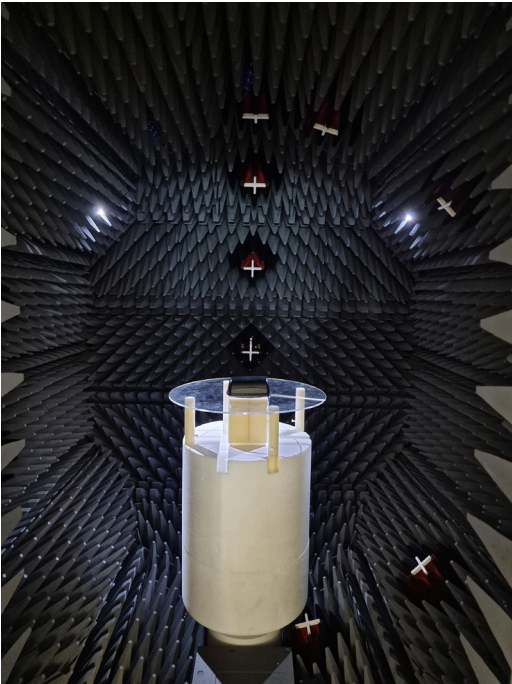Measurement Conditions	4G/5G Antennas				
LGADM4-7-42 measured in free space with 0.5m (1.6') CS30 Cable	Frequency Range (MHz)	LTE Bands	Antenna Element	Peak Gain (dBi)	Efficiency (%)
	699-798	12,13, 14 17,28	Cell A	0.8	45
			Cell B	-0.2	45
			Cell C	-0.2	45
			Cell D	-0.1	46
	807- 862	5,19,20,26,27	Cell A	1.8	50
			Cell B	0.5	50
			Cell C	0.7	50
			Cell D	0.6	52
	880-960	8	Cell A	1.9	53
			Cell B	1.3	57
			Cell C	1.6	53
			Cell D	1.6	56
	1427-1518	11, 21, 74,75,76	Cell A	1.3	40
			Cell B	1.8	46
			Cell C	1.0	35
			Cell D	1.5	45
	1710-1920	2,3,4,9,25,35, 39,66	Cell A	2.2	52
			Cell B	2.0	47
			Cell C	2.2	48
			Cell D	1.2	44
1920-2170	1,23	Cell A	3.7	56	
		Cell B	2.5	48	
		Cell C	3.9	55	
		Cell D	2.2	47	
2300-2400	30,40	Cell A	4.4	63	
		Cell B	1.3	53	
		Cell C	4.5	60	
		Cell D	1.4	51	
2496-2690	7,38,41	Cell A	5.4	64	
		Cell B	3.3	53	
		Cell C	5.2	61	
		Cell D	2.6	54	
3300-4200	22,42,43,48,77, 78	Cell A	6.3	65	
		Cell B	4.5	47	
		Cell C	4.9	62	
		Cell D	4.4	47	

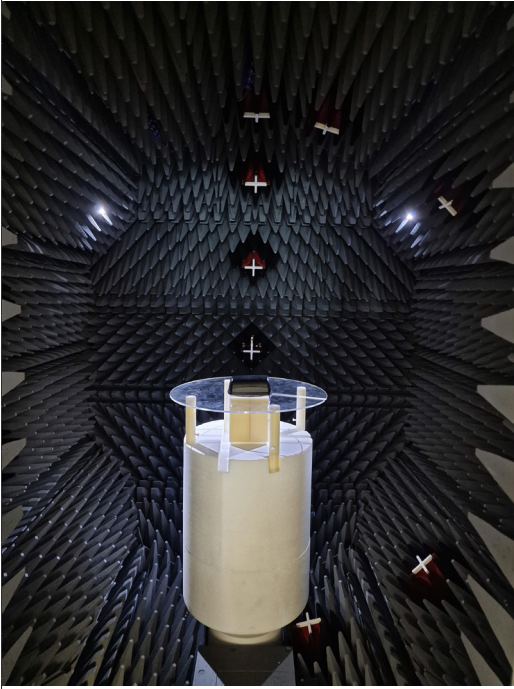Measurement Conditions	WiFi Antennas				
LGADM4-7-42 measured in free space with 0.5m (1.6') CS30 Cable	Frequency Range (MHz)	WiFi Bands	Antenna Element	Peak Gain (dBi)	Efficiency (%)
	2396-2485	2.4GHz	WiFi 1	3.6	60
			WiFi 2	3.4	57
	5150-5250	UNII-1	WiFi 1	6.3	63
			WiFi 2	6.6	61
	5250-5350	UNII-2A	WiFi 1	6.1	60
			WiFi 2	6.7	59
	5350-5470	UNII-2B	WiFi 1	6.1	60
			WiFi 2	6.4	56
	5470-5725	UNII-2C	WiFi 1	6.1	61
			WiFi 2	6.5	55
	5725-5850	UNII-3	WiFi 1	6.0	65
			WiFi 2	6.2	56
	5850-5925	UNII-4	WiFi 1	5.3	64
			WiFi 2	5.5	56
	5925-6425	UNII-5	WiFi 1	5.4	63
			WiFi 2	5.3	57
6425-6525	UNII-6	WiFi 1	5.4	61	
		WiFi 2	5.5	60	
6525-6875	UNII-7	WiFi 1	5.2	57	
		WiFi 2	6.2	58	
6875-7125	UNII-8	WiFi 1	4.8	51	
		WiFi 2	5.6	58	


Electrical Data- Cell- Free space

Typical VSWR*

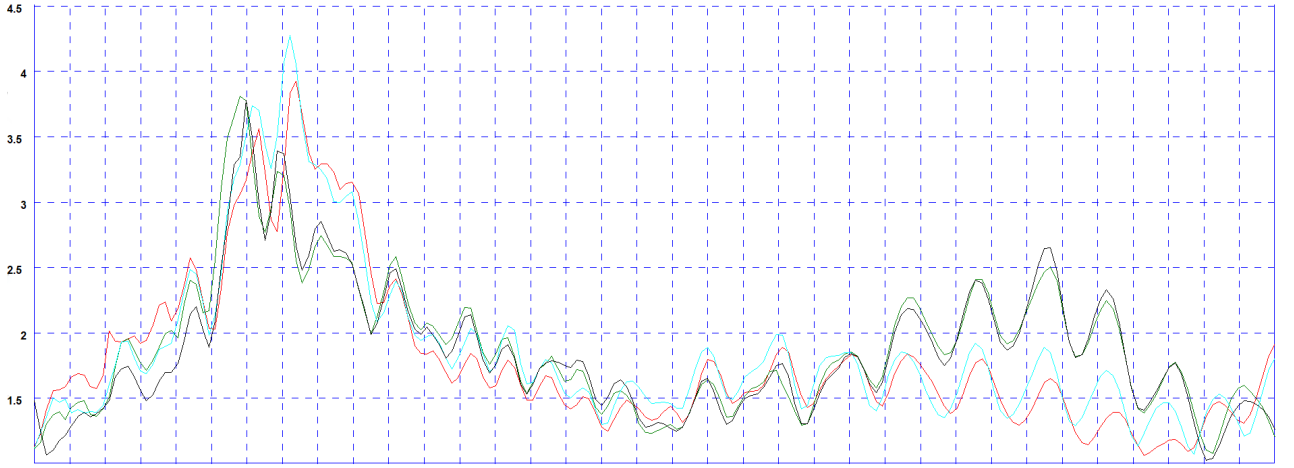


VSWR measured in free space with 0.5m (1.6') of CS30 cable

Typical Efficiency*

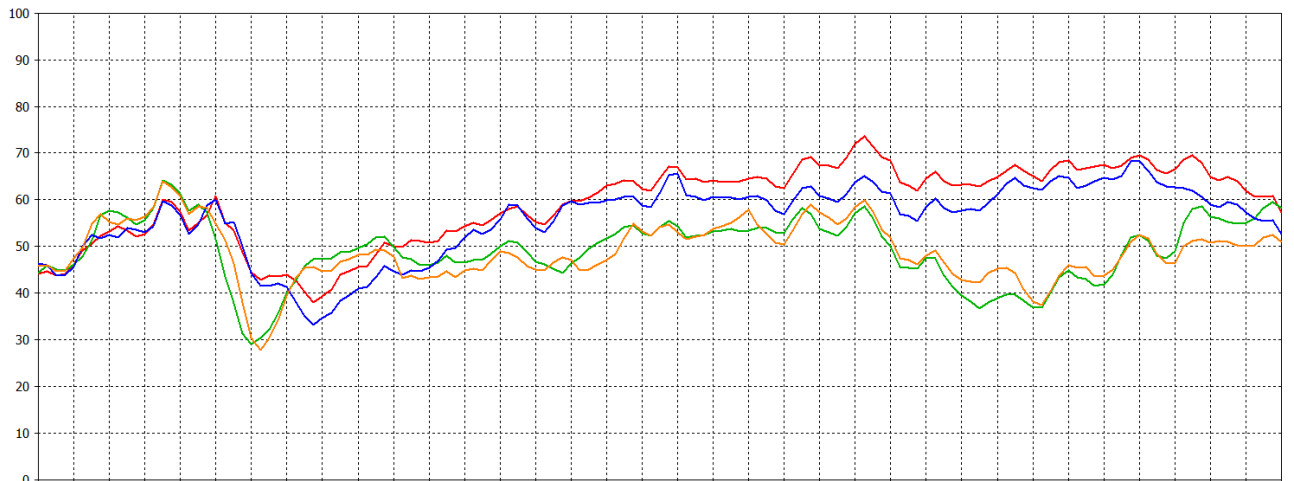


*Efficiency measured in free space with 0.5m (1.6') of CS30 cable

Typical Swept Peak Gain*

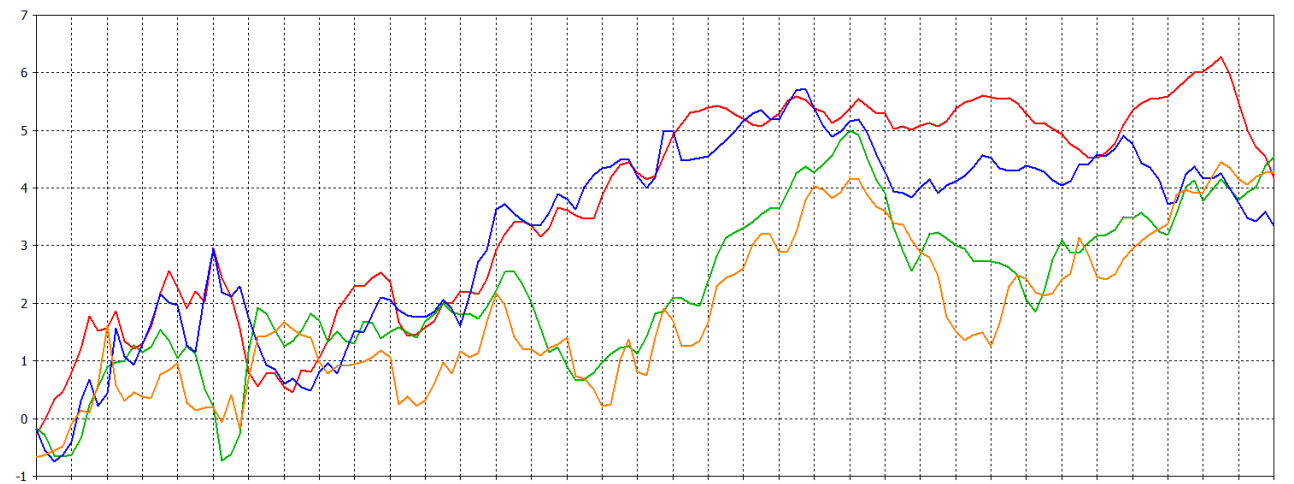


* Swept peak gain measured in free space with 0.5m (1.6') of CS30 cable

Typical VSWR*

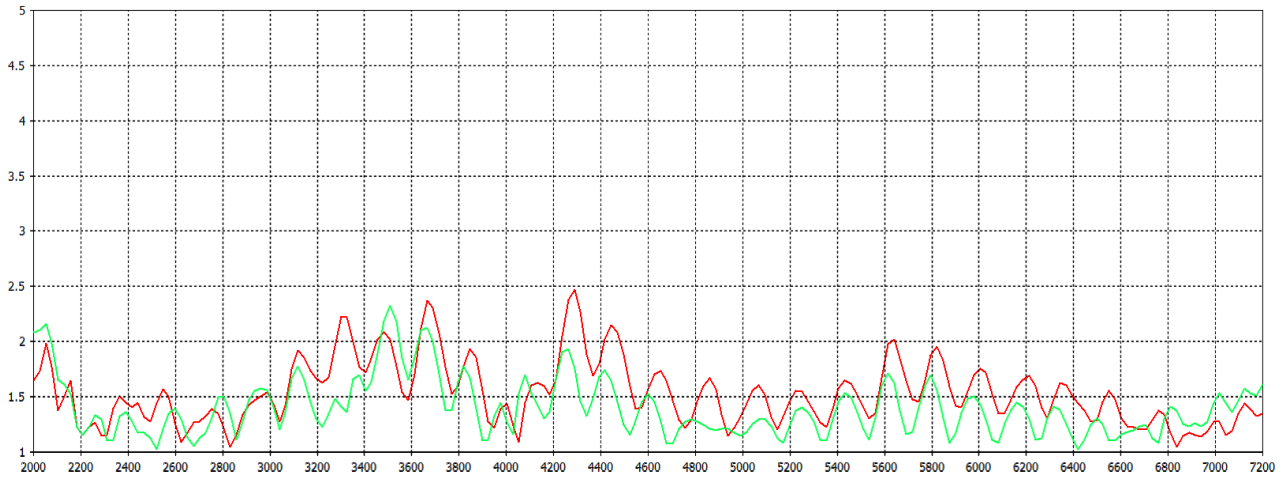


*VSWR measured in free space with 0.5m (1.6') of CS30 cable

Typical Efficiency*

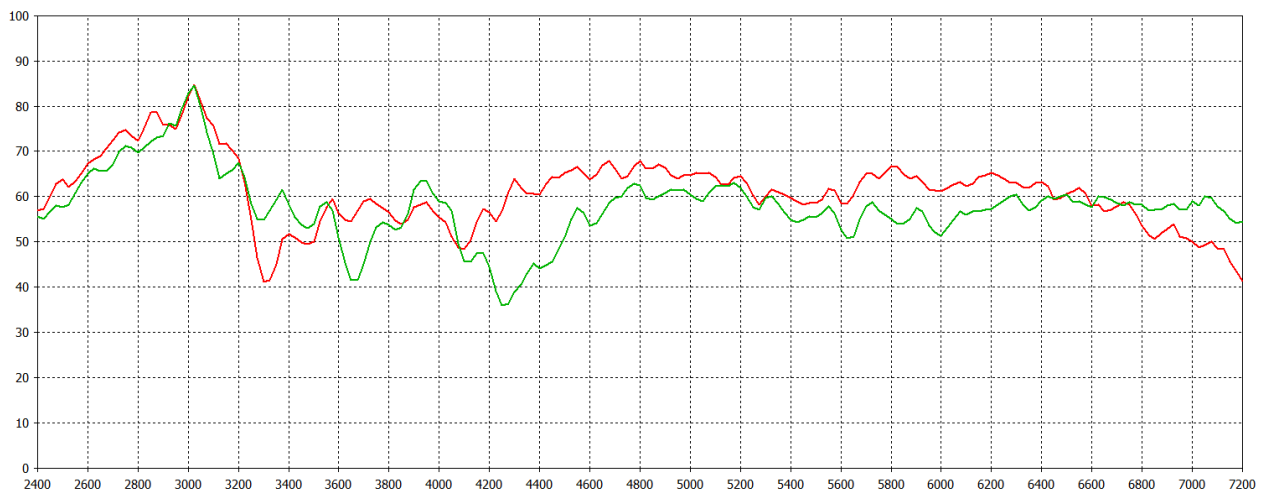

*Efficiency measured in free space with 0.5m (1.6') of CS30 cable


Typical Swept Peak Gain*

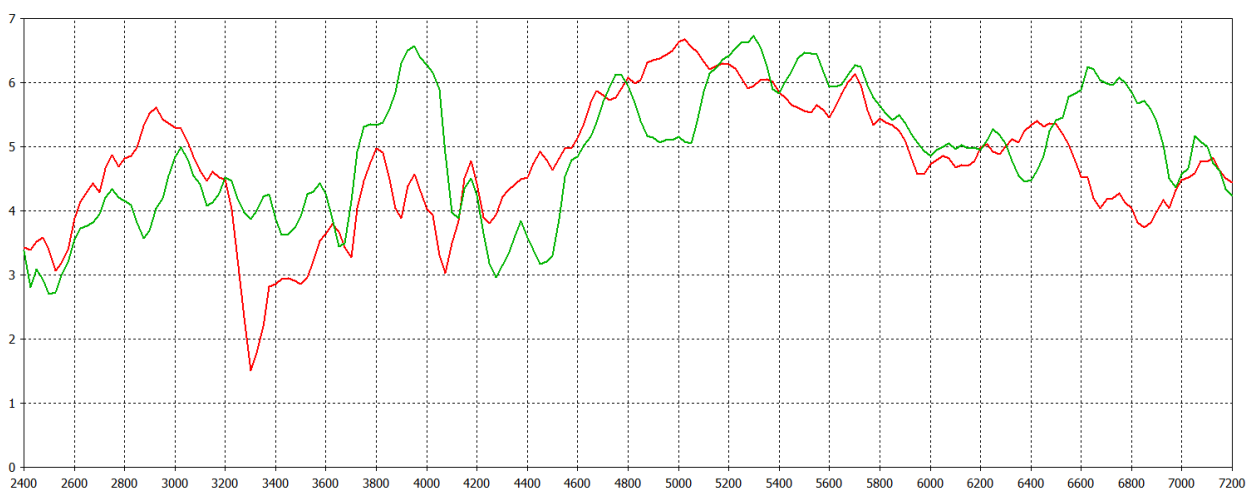


* Swept peak gain measured in free space with 0.5m (1.6') of CS30 cable

3D Pattern Data in Free Space Cell A


Typical 3D Pattern- Cell A - 750 MHz

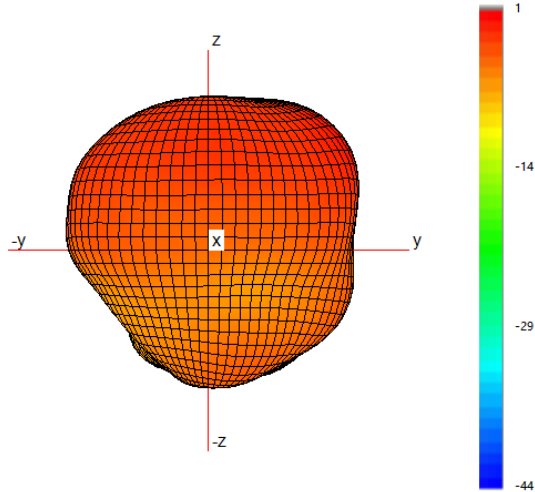


Typical H Plane- Cell A - Patterns- 700-800MHz

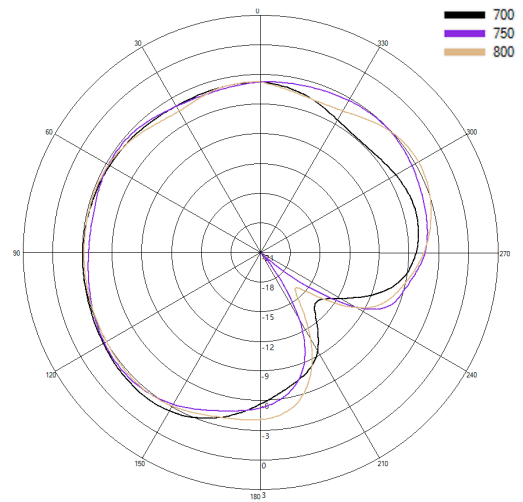


Typical 3D Pattern- Cell A - 850 MHz

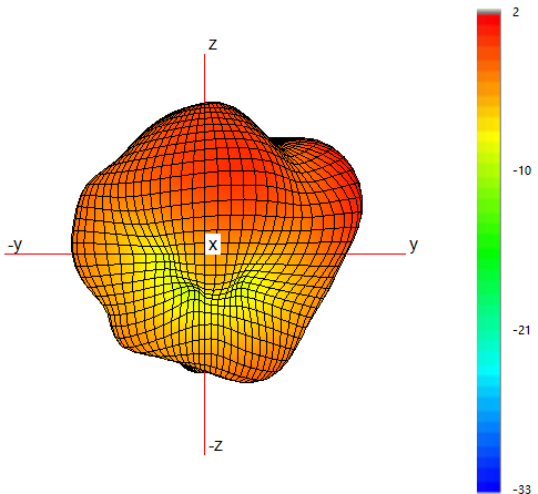


Typical H Plane- Cell A - Patterns- 800-900MHz

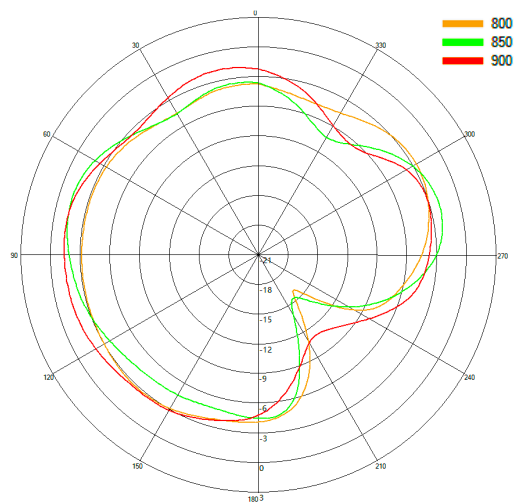

Typical 3D Pattern- Cell A - 1475 MHz

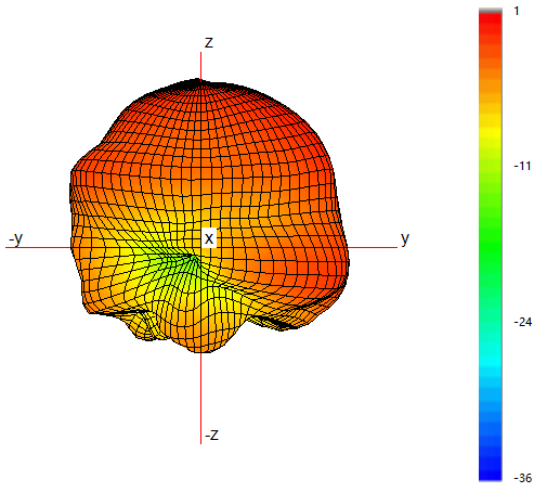


Typical H Plane- Cell A- Patterns- 1450-1500 MHz

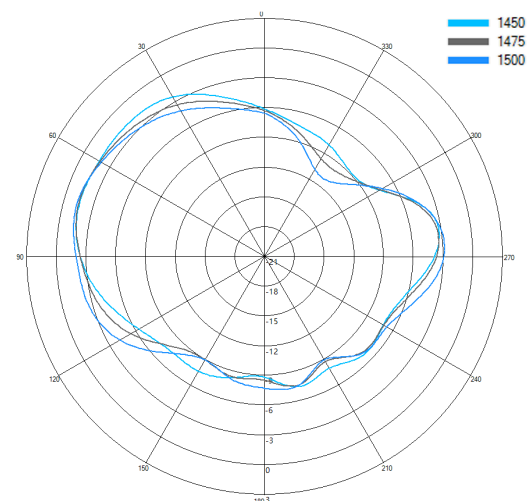


3D Pattern Data in Free Space Cell A


Typical 3D Pattern- Cell A - 1800 MHz

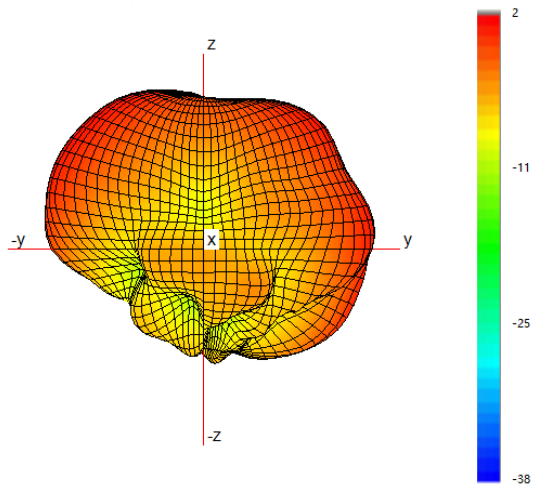


Typical H Plane- Cell A- Patterns- 1750-1850 MHz

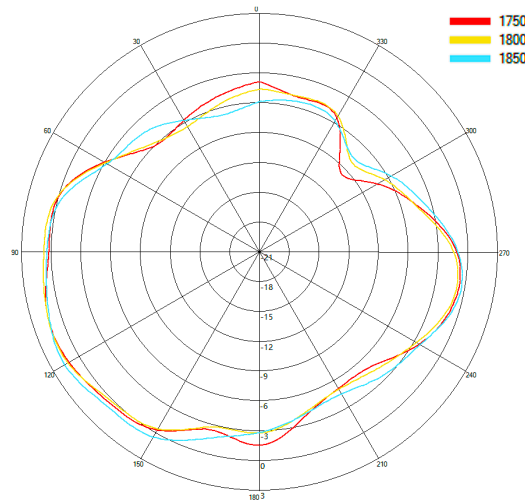


Typical 3D Pattern- Cell A - 2150 MHz

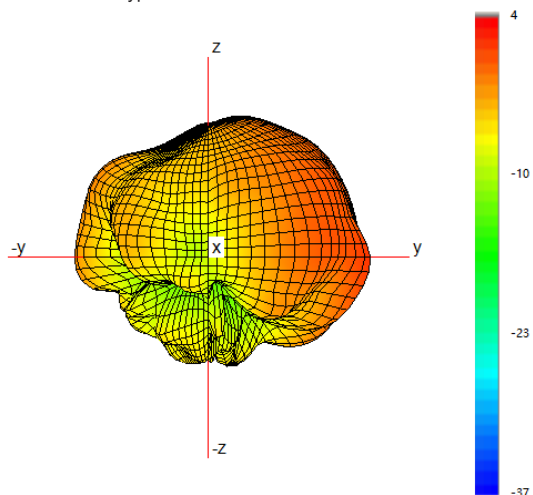


Typical H Plane- Cell A- Patterns- 2100-2200 MHz

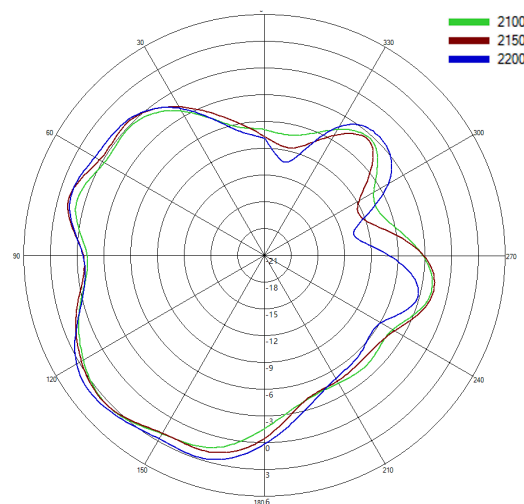

Typical 3D Pattern- Cell A - 2350 MHz

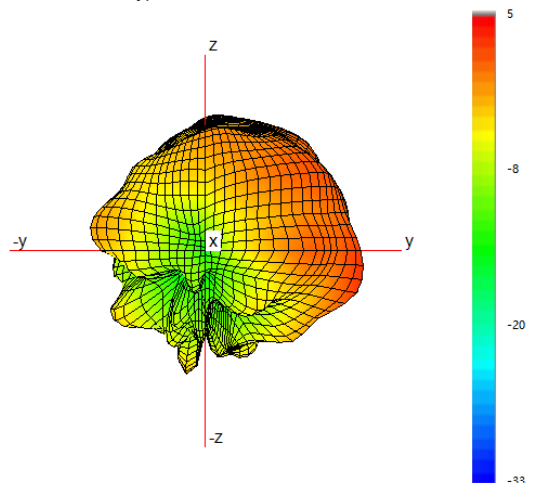


Typical H Plane- Cell A - Patterns- 2300-2400 MHz

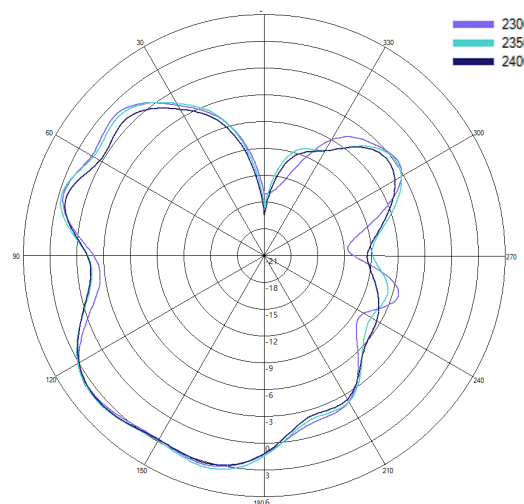


3D Pattern Data in Free Space Cell A


Typical 3D Pattern- Cell A - 2650 MHz

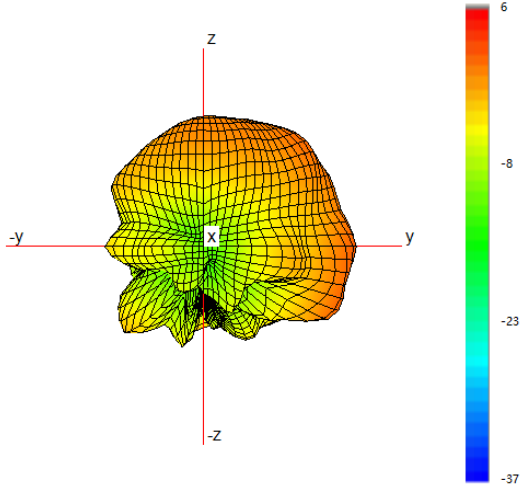


Typical H Plane- Cell A - Patterns- 2600-2700 MHz

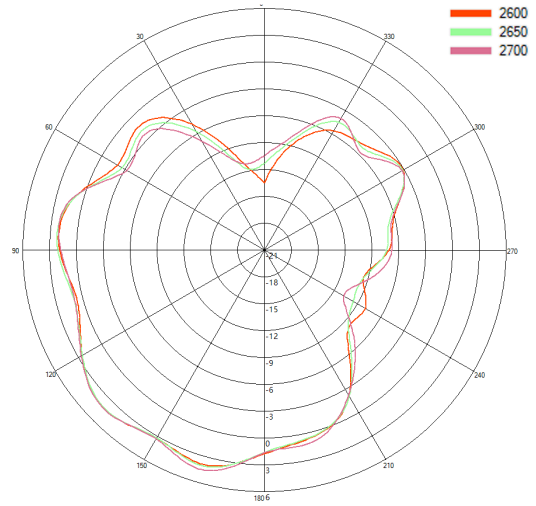

Typical 3D Pattern- Cell A - 3600 MHz

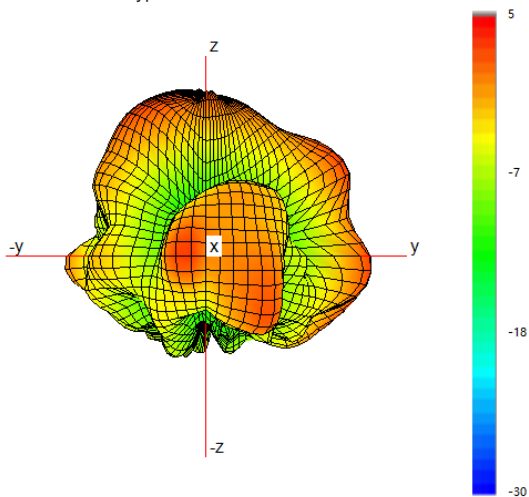


Typical H Plane- Cell A - Patterns- 3400-3800 MHz

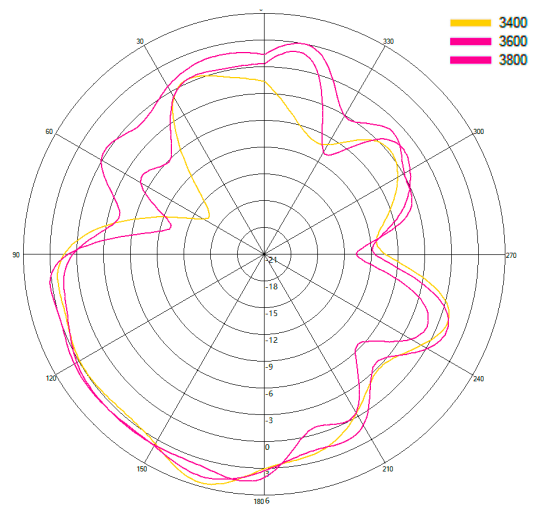


3D Pattern Data in Free Space Cell B


Typical 3D Pattern- Cell B - 750 MHz

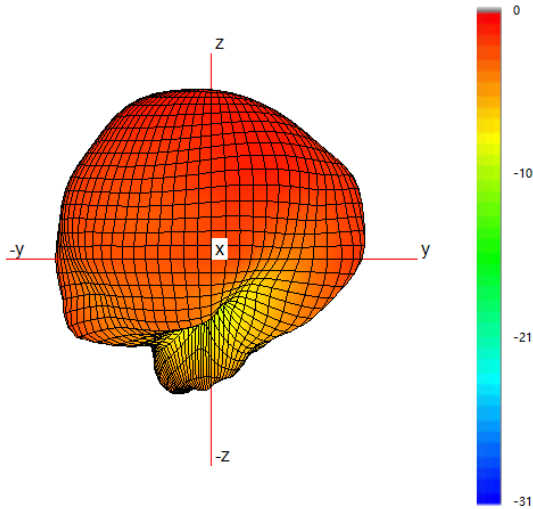


Typical H Plane- Cell B - Patterns- 700-800MHz

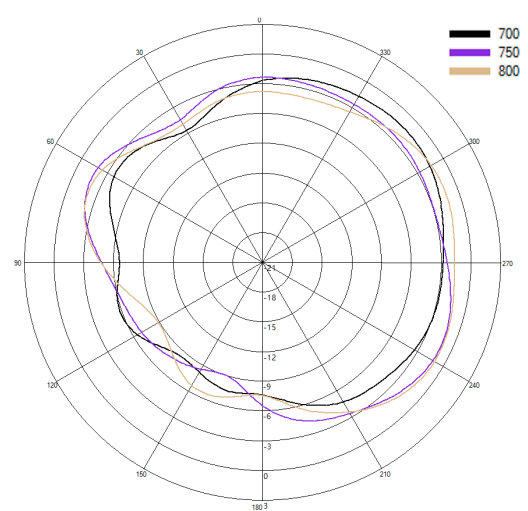


Typical 3D Pattern- Cell B - 850 MHz

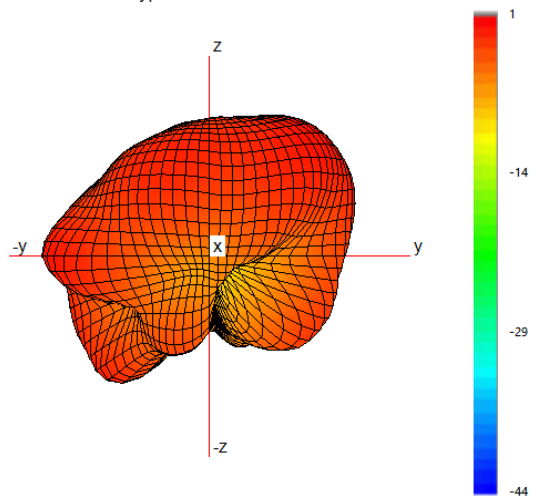


Typical H Plane- Cell B - Patterns- 800-900MHz

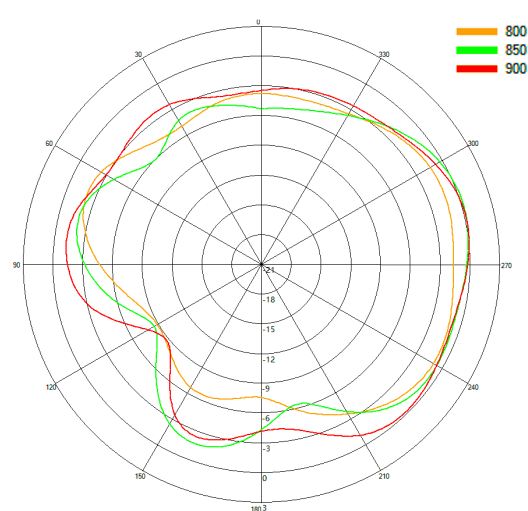

Typical 3D Pattern- Cell B - 1475 MHz

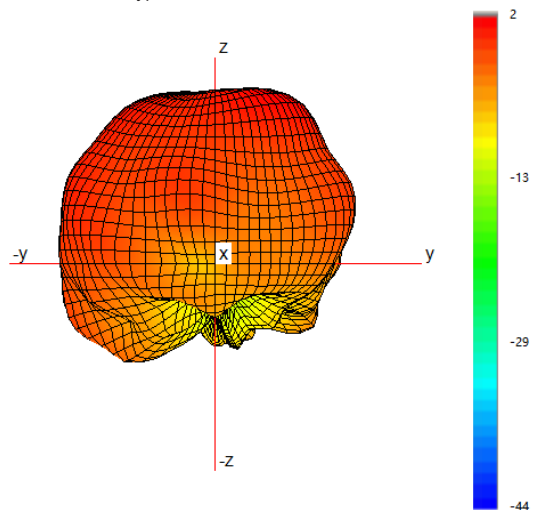


Typical H Plane- Cell B - Patterns- 1450-1500 MHz

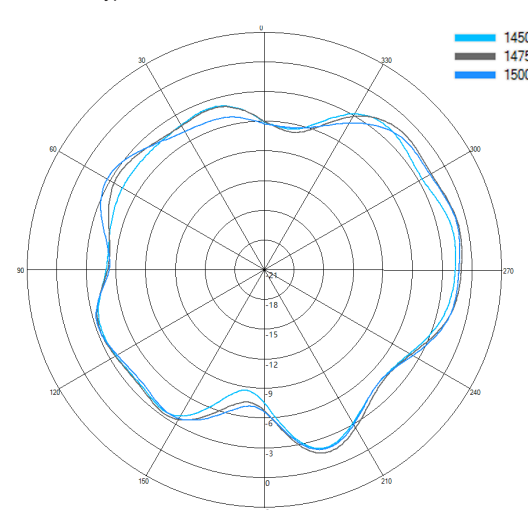


3D Pattern Data in
Free Space Cell B


Typical 3D Pattern- Cell B - 1800 MHz

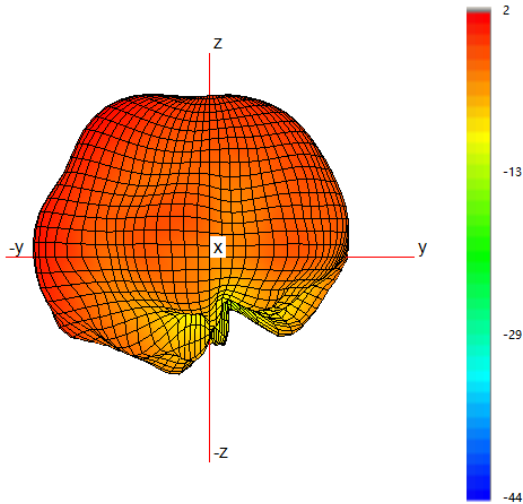


Typical H Plane- Cell B- Patterns- 1750-1850 MHz

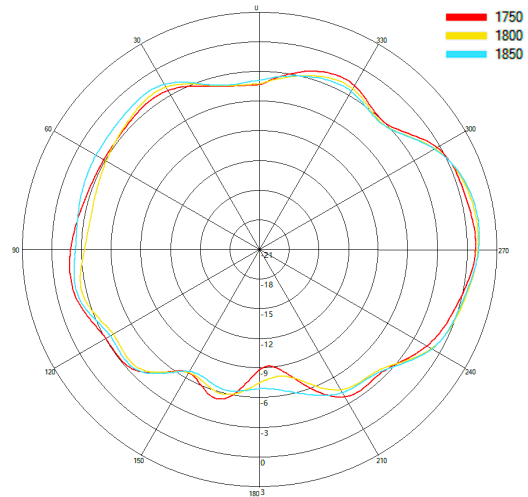


Typical 3D Pattern- Cell B - 2150 MHz

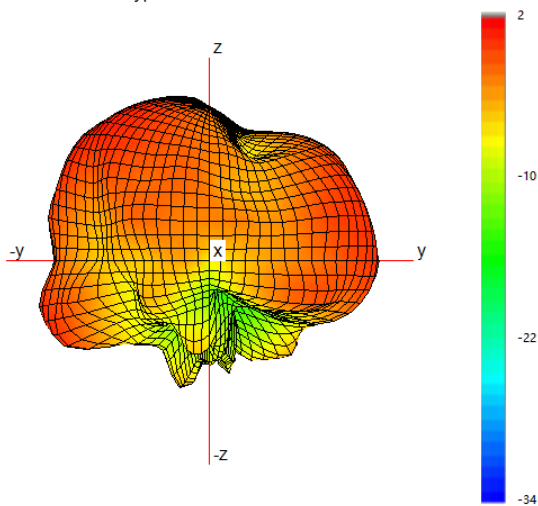


Typical H Plane- Cell B- Patterns- 2100-2200 MHz

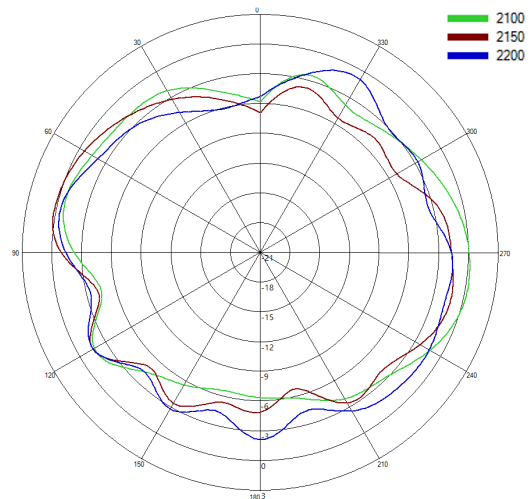

Typical 3D Pattern- Cell B - 2350 MHz

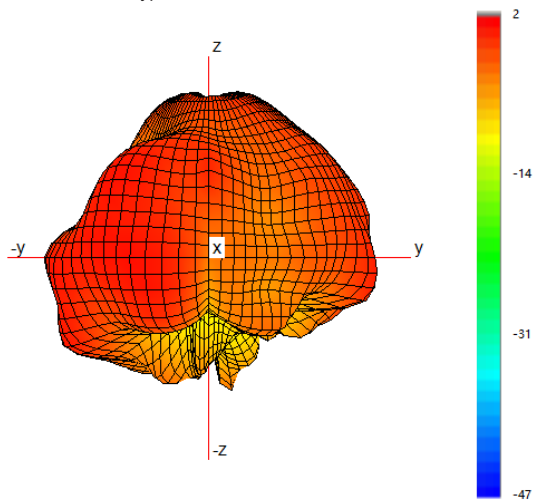


Typical H Plane- Cell B - Patterns- 2300-2400 MHz

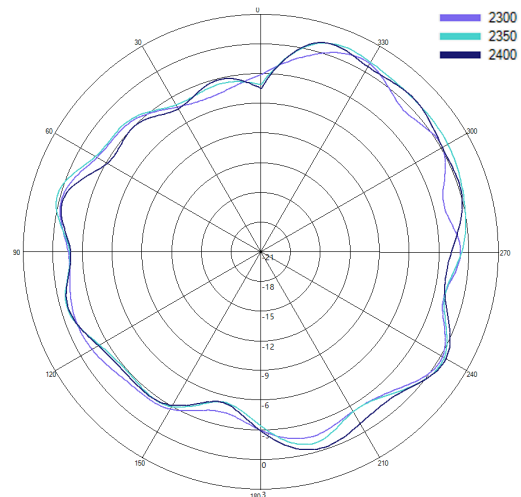


3D Pattern Data in Free Space Cell B


Typical 3D Pattern- Cell B - 2650 MHz

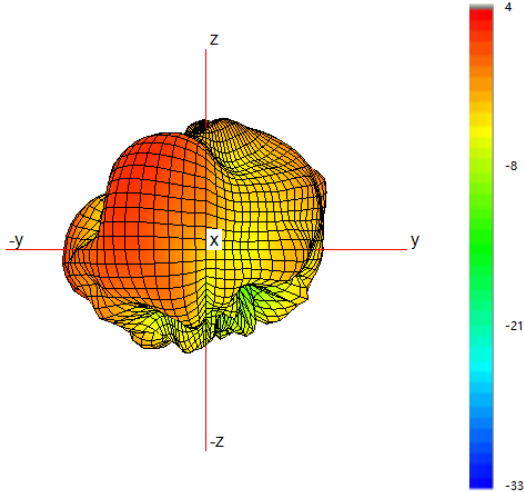


Typical H Plane- Cell B - Patterns- 2600-2700 MHz

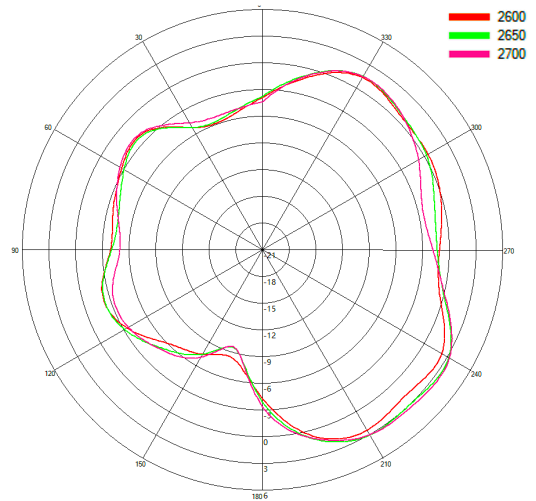

Typical 3D Pattern- Cell B - 3600 MHz

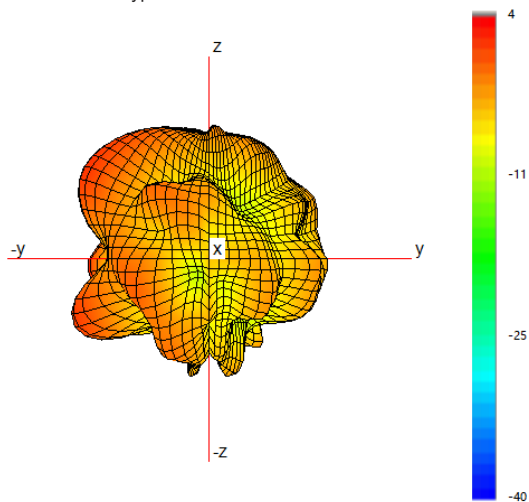


Typical H Plane- Cell B - Patterns- 3400-3800 MHz

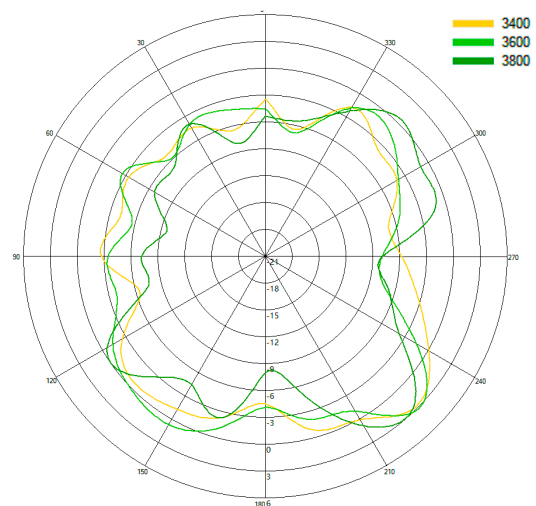


3D Pattern Data in Free Space Cell C


Typical 3D Pattern- Cell C - 750 MHz

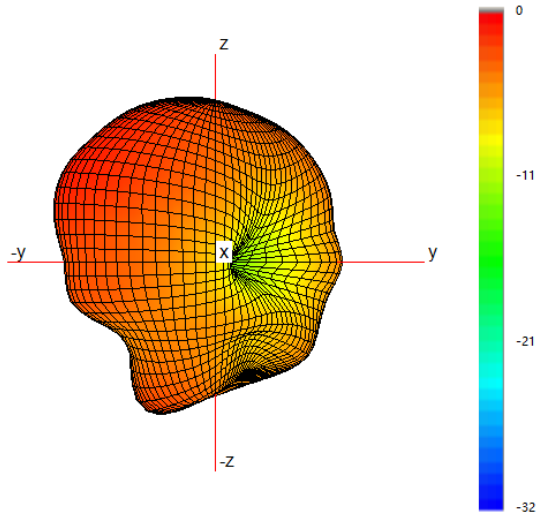


Typical H Plane- Cell C - Patterns- 700-800MHz

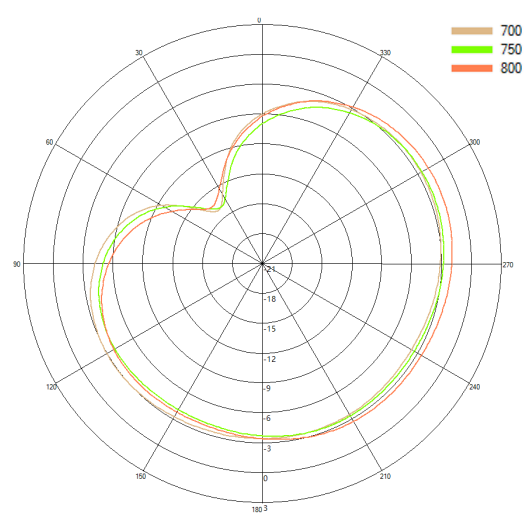


Typical 3D Pattern- Cell C - 850 MHz

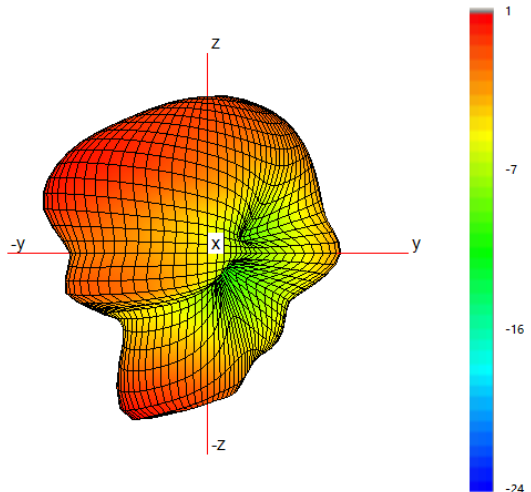


Typical H Plane- Cell C - Patterns- 800-900MHz

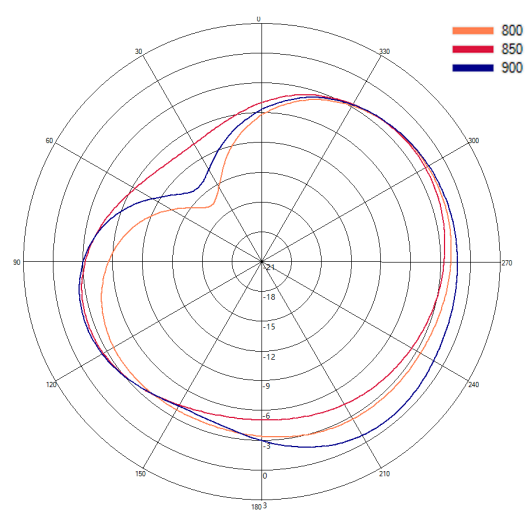

Typical 3D Pattern- Cell C - 1475 MHz

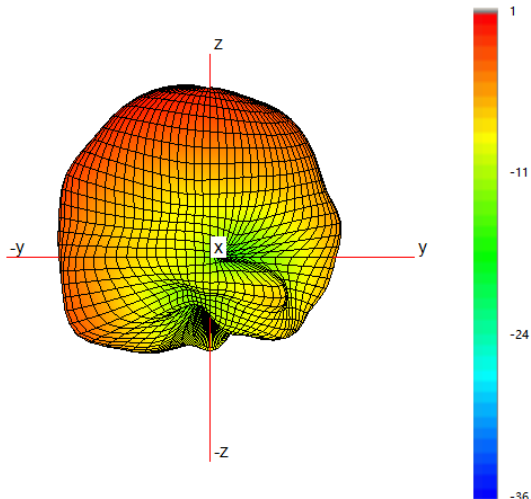


Typical H Plane- Cell C- Patterns- 1450-1500 MHz

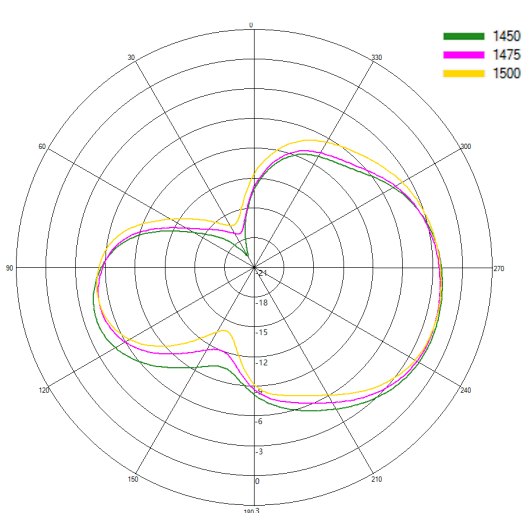


3D Pattern Data in Free Space Cell C


Typical 3D Pattern- Cell C - 1800 MHz

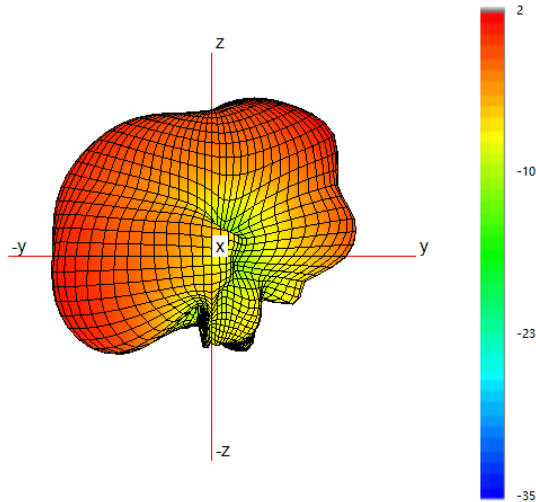


Typical H Plane- Cell C- Patterns- 1750-1850 MHz

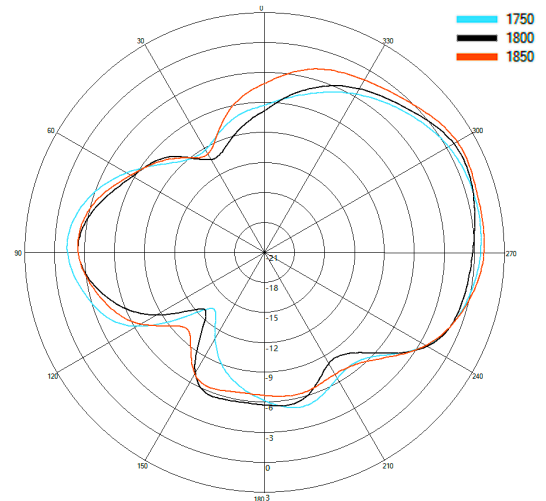


Typical 3D Pattern- Cell C - 2150 MHz

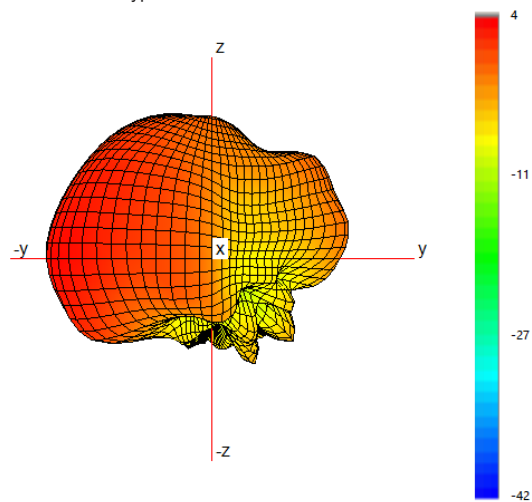


Typical H Plane- Cell C- Patterns- 2100-2200 MHz

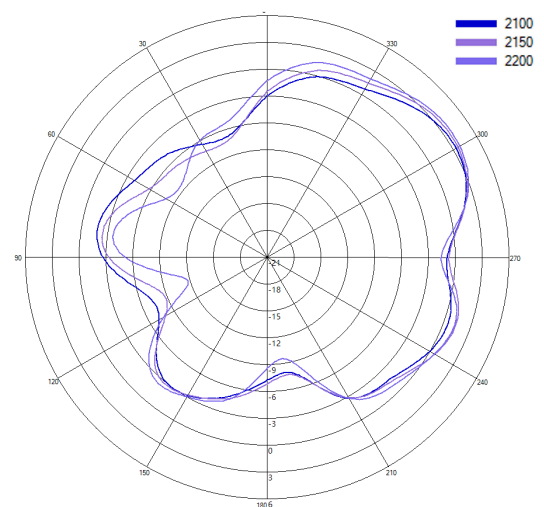

Typical 3D Pattern- Cell C - 2350 MHz

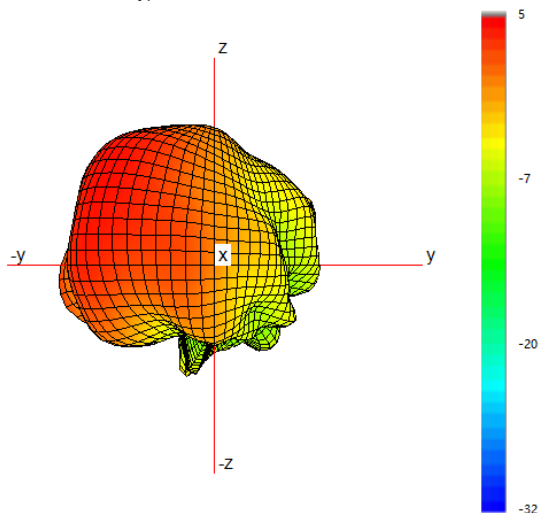


Typical H Plane- Cell C - Patterns- 2300-2400 MHz

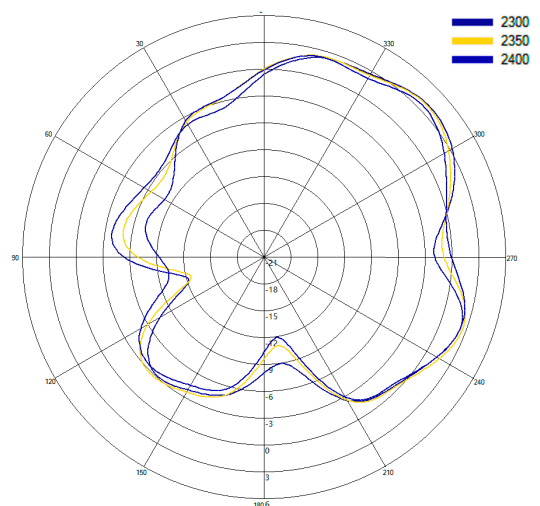


3D Pattern Data in
Free Space Cell C


Typical 3D Pattern- Cell C - 2650 MHz

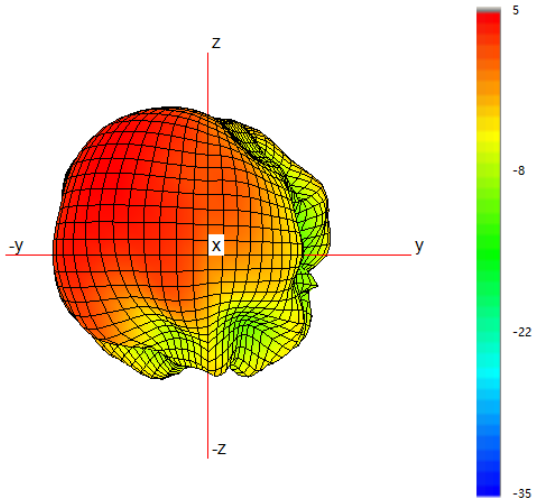


Typical H Plane- Cell C - Patterns- 2600-2700 MHz

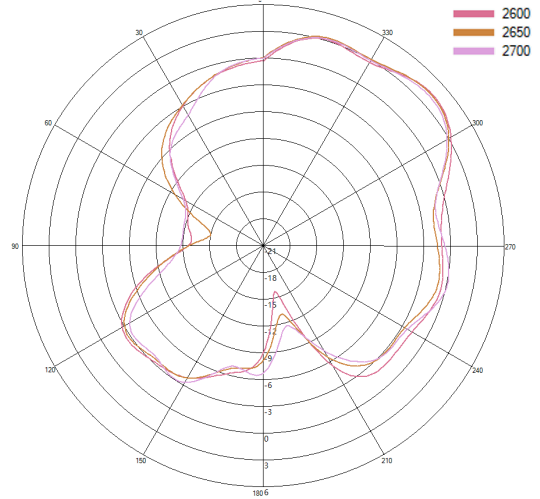

Typical 3D Pattern- Cell C - 3600 MHz

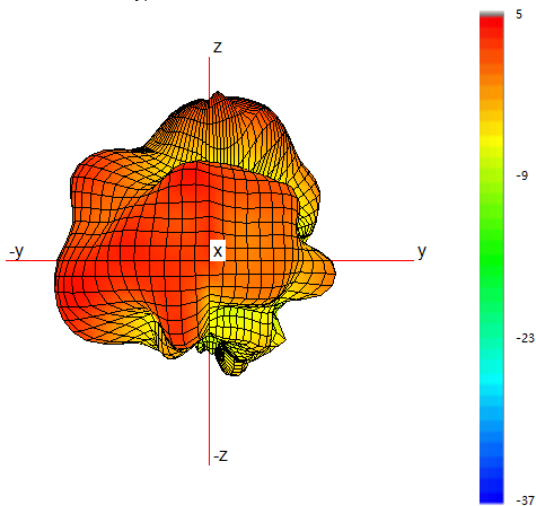


Typical H Plane- Cell C - Patterns- 3400-3800 MHz

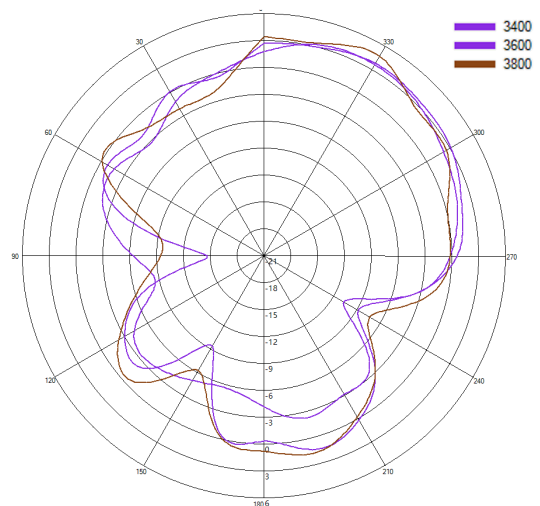


3D Pattern Data in Free Space Cell D


Typical 3D Pattern- Cell D - 750 MHz

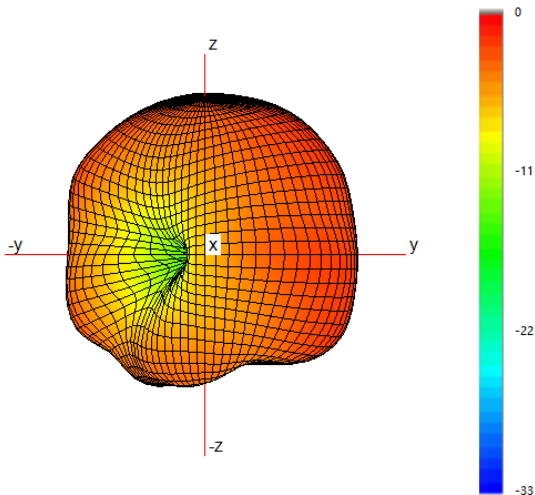


Typical H Plane- Cell D - Patterns- 700-800MHz

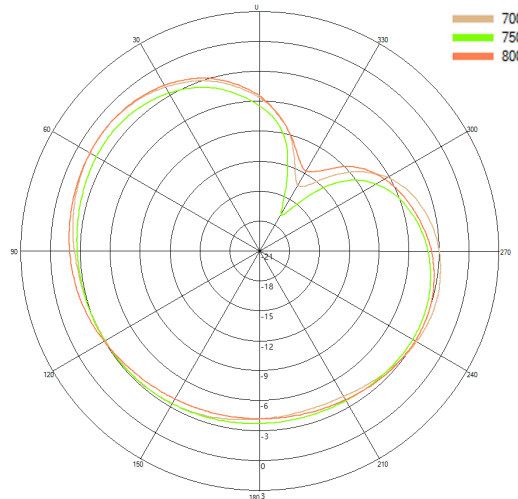


Typical 3D Pattern- Cell D - 850 MHz

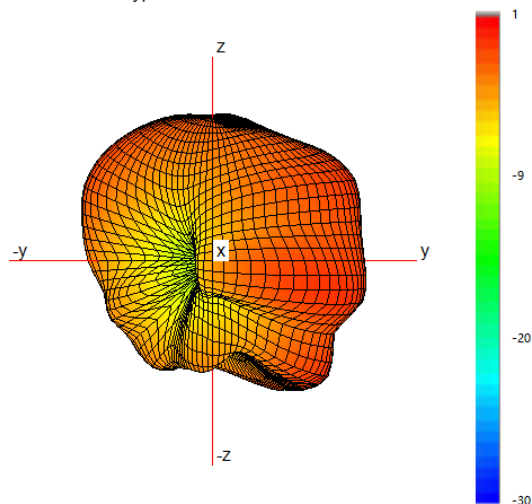


Typical H Plane- Cell D - Patterns- 800-900MHz

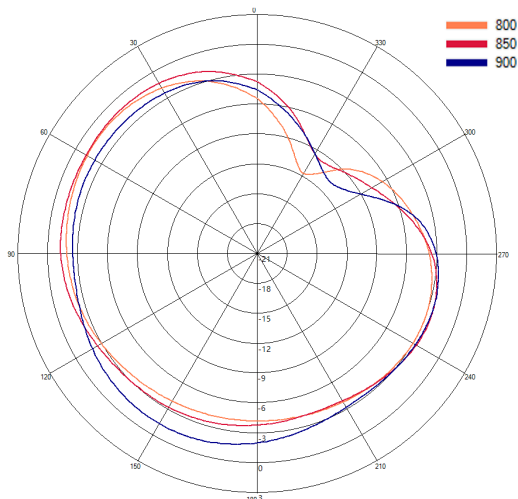

Typical 3D Pattern- Cell D - 1475 MHz

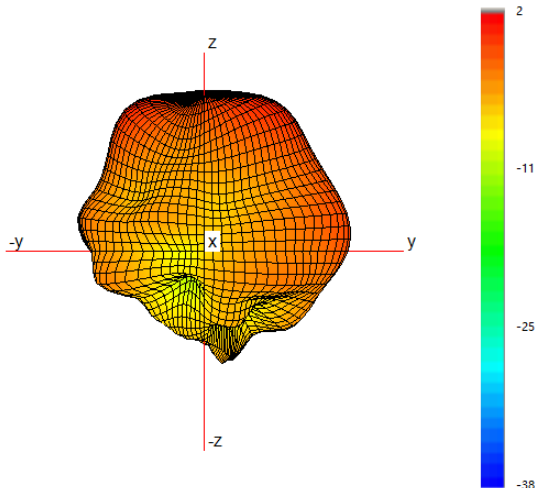


Typical H Plane- Cell D- Patterns- 1450-1500 MHz

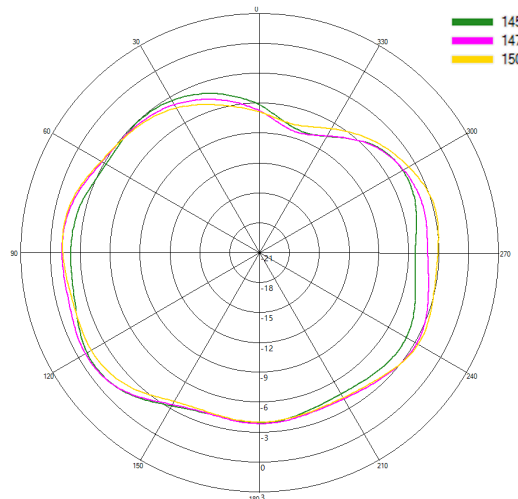


3D Pattern Data in Free Space Cell D


Typical 3D Pattern- Cell D - 1800 MHz

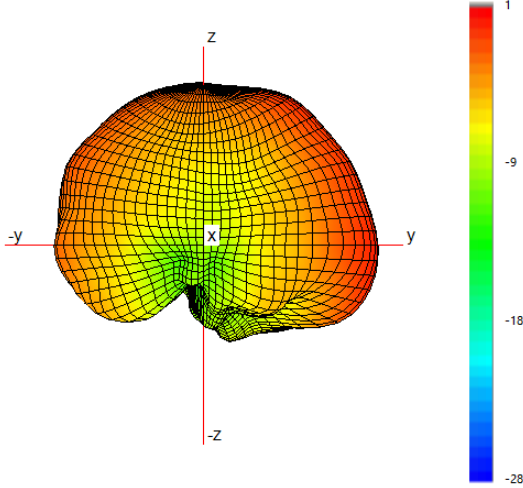


Typical H Plane- Cell D- Patterns- 1750-1850 MHz

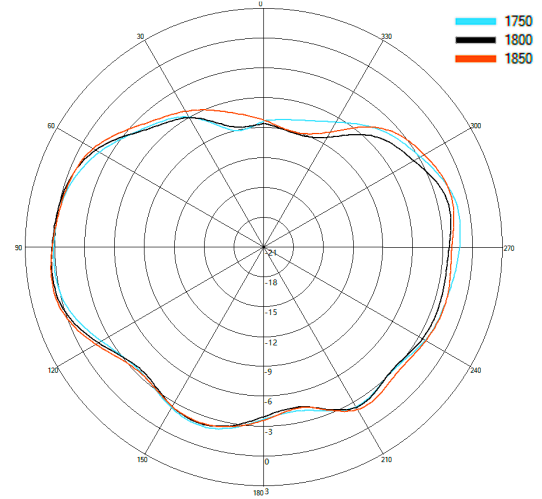


Typical 3D Pattern- Cell D - 2150 MHz

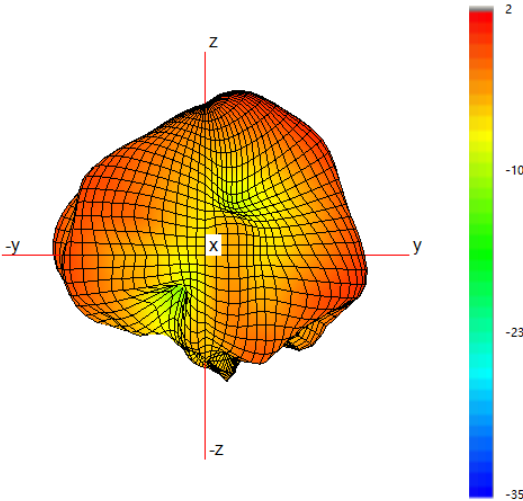


Typical H Plane- Cell D- Patterns- 2100-2200 MHz

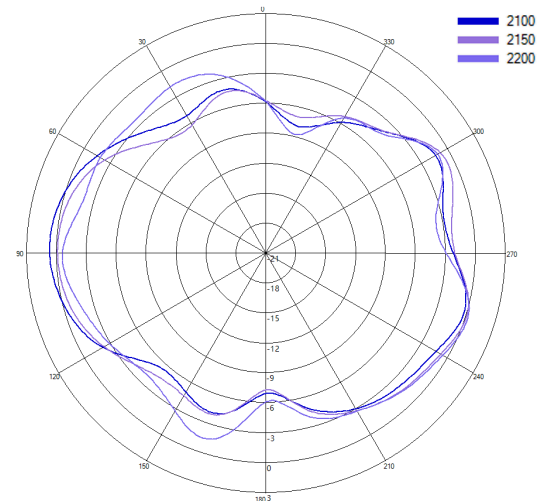

Typical 3D Pattern- Cell D - 2350 MHz

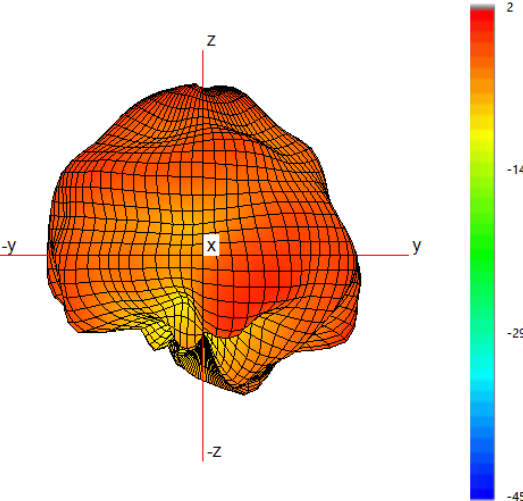


Typical H Plane- Cell D - Patterns- 2300-2400 MHz

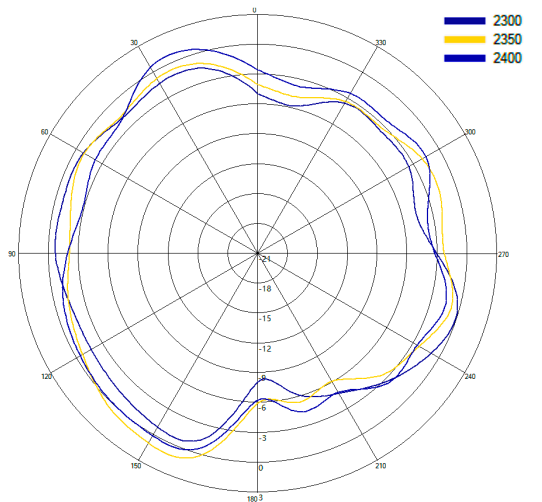


3D Pattern Data in Free Space Cell D


Typical 3D Pattern- Cell D - 2650 MHz

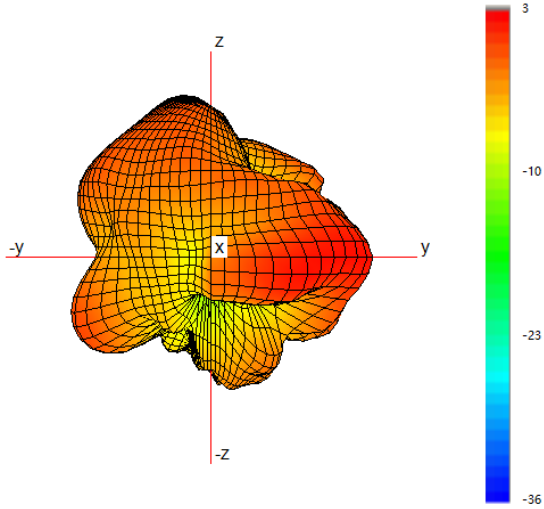


Typical H Plane- Cell D - Patterns- 2600-2700 MHz

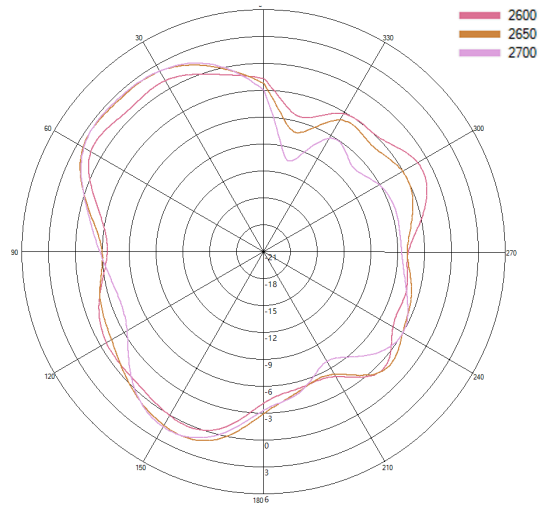

Typical 3D Pattern- Cell D - 3600 MHz

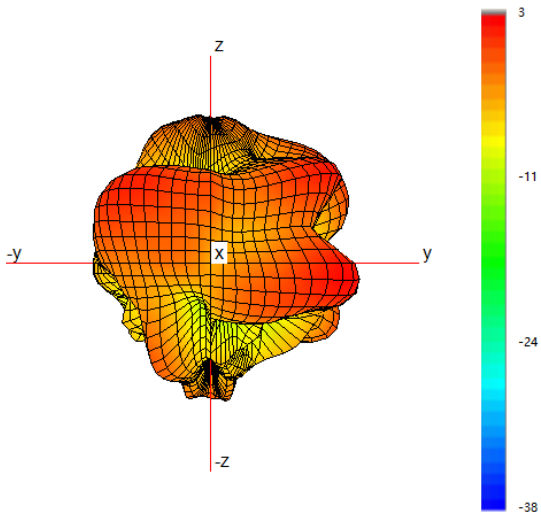


Typical H Plane- Cell D - Patterns- 3400-3800 MHz

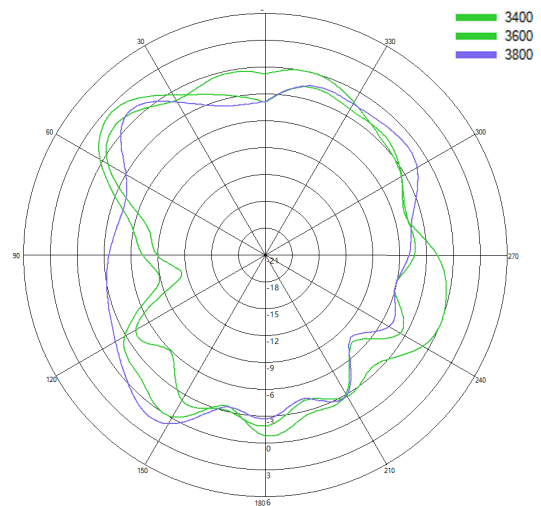


WiFi Pattern-Data in Free Space -WiFi -1


Typical 3D Pattern- WiFi - 1 - 2450 MHz

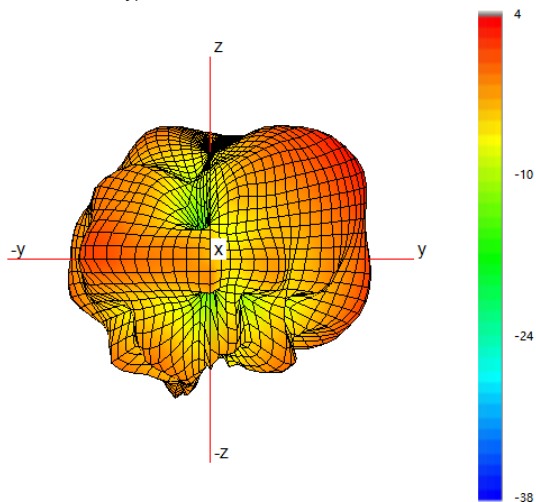


Typical H Plane- WiFi - 1 - Patterns- 2400-2475MHz

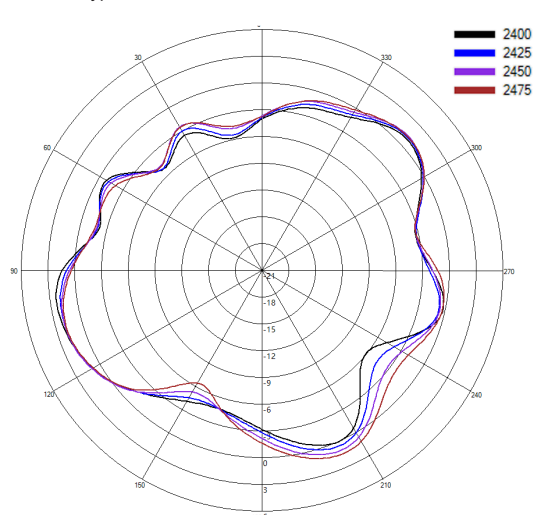


Typical 3D Pattern- WiFi - 1 - 5500 MHz

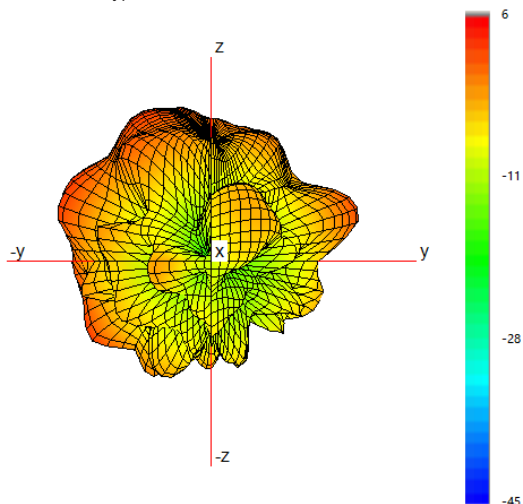


Typical H Plane- WiFi - 1 - Patterns- 5200-5800MHz

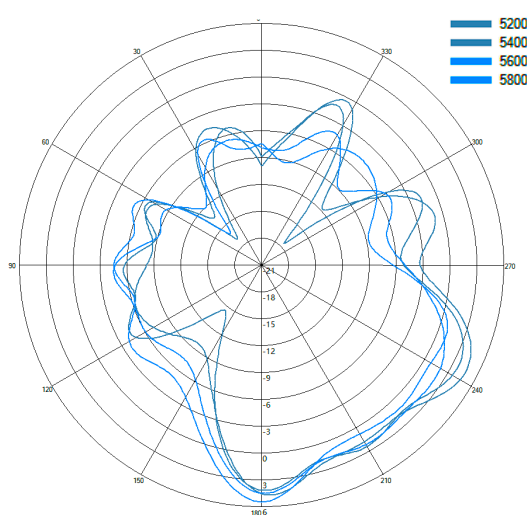


Typical 3D Pattern- WiFi - 1 - 6500 MHz

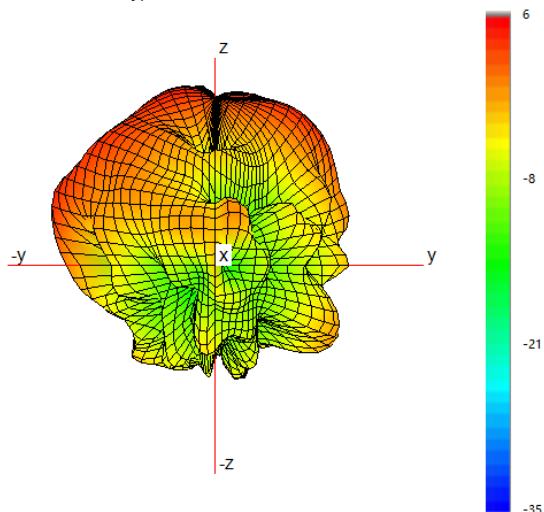


Typical H Plane- WiFi - 1 - Patterns- 6200-6800MHz

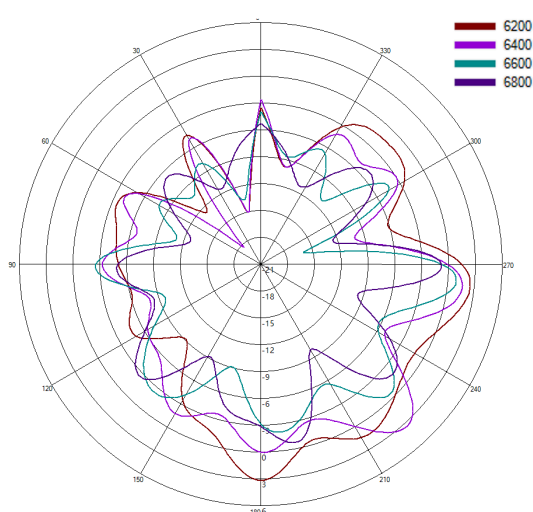


Typical 3D Pattern- WiFi - 2 - 2450 MHz

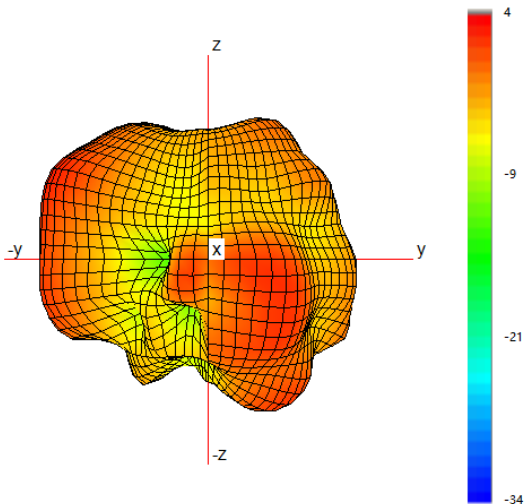


Typical H Plane- WiFi - 2 - Patterns- 2400-2475MHz

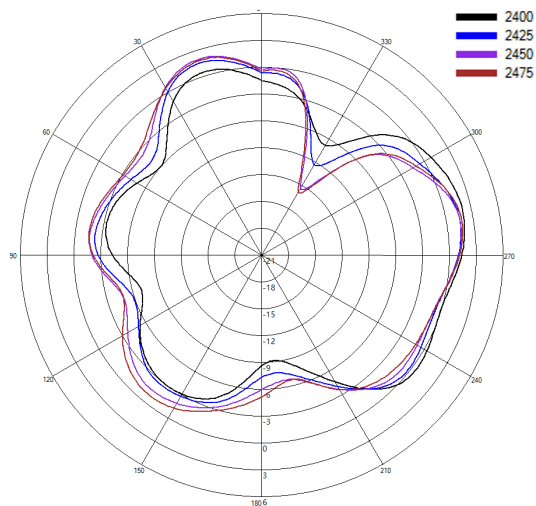


Typical 3D Pattern- WiFi - 2 - 5500 MHz

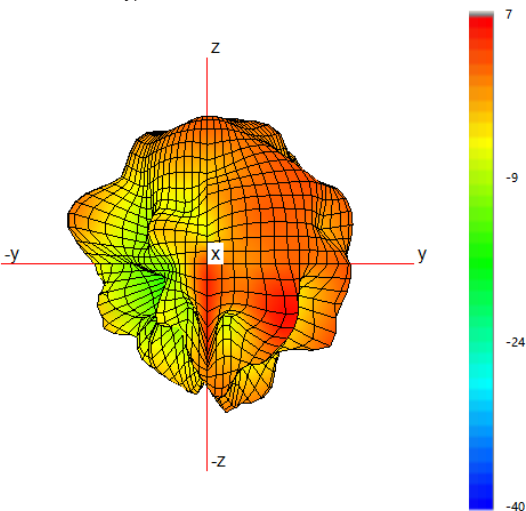


Typical H Plane- WiFi - 2 - Patterns- 5200-5800MHz

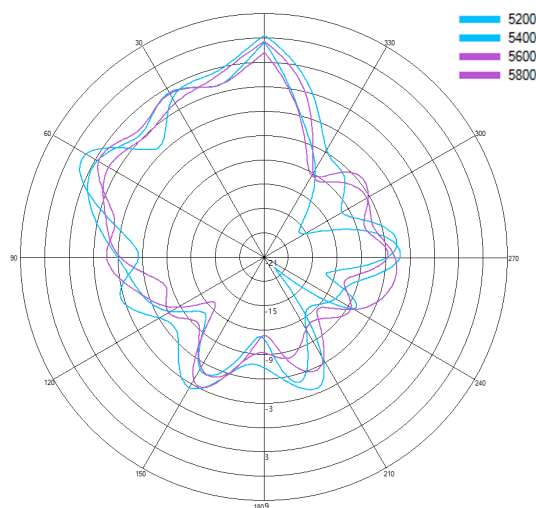

Typical 3D Pattern- WiFi - 2 - 6500 MHz

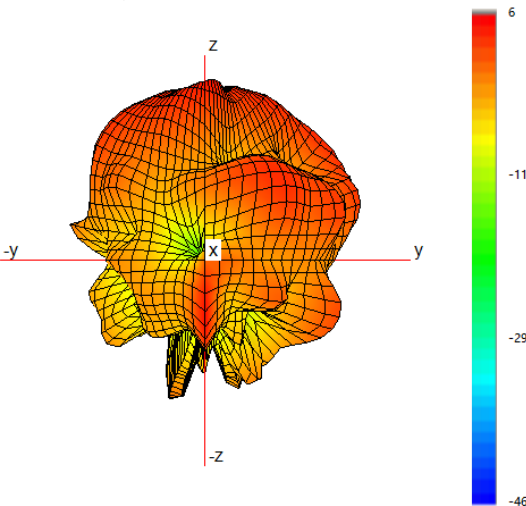

Typical H Plane- WiFi - 2 - Patterns- 6200-6800MHz

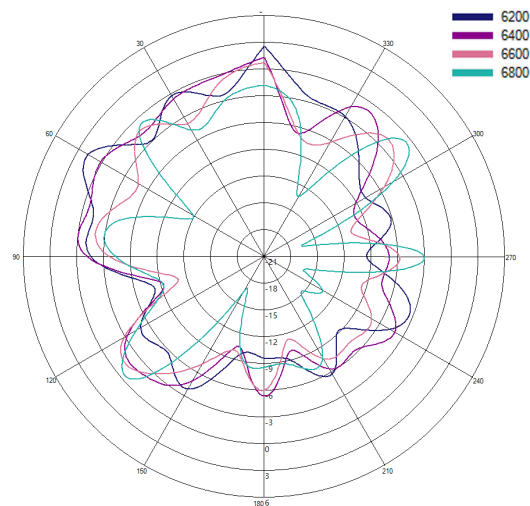

4X4 MiMo 4G/5G


IOT Antenna

L[X]A[X]M4-7-42[-X]

Electrical Data Cell on Ground Plane


Measurement Conditions

LGADM4-7-42 measured on 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') CS30 Cable

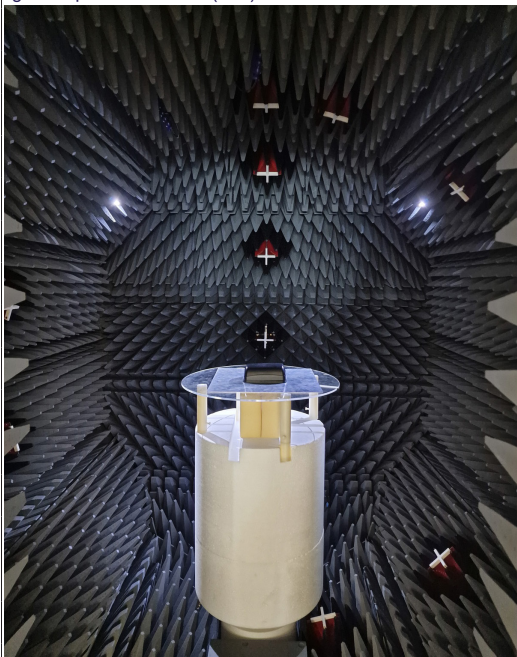


4G/5G Antennas

Frequency Range (MHz)	LTE Bands	Antenna Element	Peak Gain (dBi)	Efficiency (%)
699-798	12,13, 14 17,28	Cell A	3.5	44
		Cell B	3.0	46
		Cell C	3.7	40
		Cell D	2.4	46
807- 862	5,19,20,26,27	Cell A	3.8	46
		Cell B	4.0	49
		Cell C	3.5	43
		Cell D	3.9	50
880-960	8	Cell A	4.2	64
		Cell B	4.2	55
		Cell C	4.5	59
		Cell D	3.9	56
1427-1518	11, 21, 74,75,76	Cell A	3.3	31
		Cell B	4.4	47
		Cell C	3.3	35
		Cell D	4.1	46
1710-1920	2,3,4,9,25,35, 39,66	Cell A	5.6	54
		Cell B	4.8	47
		Cell C	5.0	49
		Cell D	4.4	47
1920-2170	1,23	Cell A	7.6	61
		Cell B	5.9	49
		Cell C	7.1	58
		Cell D	5.2	49
2300-2400	30,40	Cell A	8.6	64
		Cell B	6.1	49
		Cell C	7.8	61
		Cell D	5.5	51
2496-2690	7,38,41	Cell A	7.8	57
		Cell B	7.2	56
		Cell C	7.5	59
		Cell D	6.5	54
3300-4200	22,42,43,48,77, 78	Cell A	6.9	61
		Cell B	6.8	49
		Cell C	7.1	61
		Cell D	6.6	49

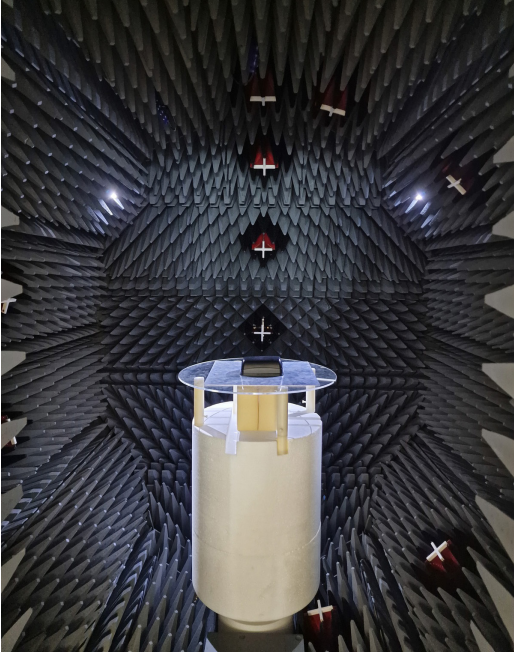Measurement Conditions	WiFi Antennas				
LGADM4-7-42 measured on 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') CS30 Cable	Frequency Range (MHz)	WiFi Bands	Antenna Element	Peak Gain (dBi)	Efficiency (%)
	2396-2485	2.4GHz	WiFi 1	5.7	55
			WiFi 2	5.6	47
	5150-5250	UNII-1	WiFi 1	8.0	57
			WiFi 2	8.6	60
	5250-5350	UNII-2A	WiFi 1	7.8	57
			WiFi 2	8.5	58
	5350-5470	UNII-2B	WiFi 1	7.8	57
			WiFi 2	8.2	56
	5470-5725	UNII-2C	WiFi 1	6.7	55
			WiFi 2	8.2	56
	5725-5850	UNII-3	WiFi 1	6.7	55
			WiFi 2	7.0	52
	5850-5925	UNII-4	WiFi 1	5.8	59
			WiFi 2	6.6	54
	5925-6425	UNII-5	WiFi 1	5.9	60
			WiFi 2	6.7	55
6425-6525	UNII-6	WiFi 1	7.8	60	
		WiFi 2	6.8	57	
6525-6875	UNII-7	WiFi 1	7.3	60	
		WiFi 2	6.4	58	
6875-7125	UNII-8	WiFi 1	5.9	62	
		WiFi 2	5.8	58	
			WiFi 1	5.7	59
			WiFi 2	5.5	56


Electrical Data Cell on Ground Plane

Typical VSWR*

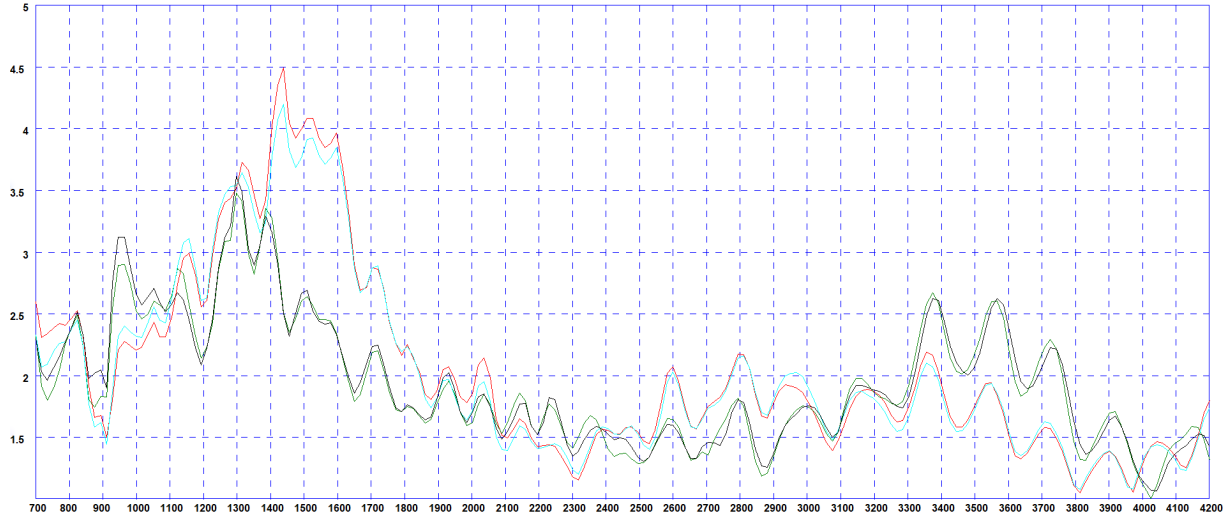


*VSWR measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable

Typical Efficiency*

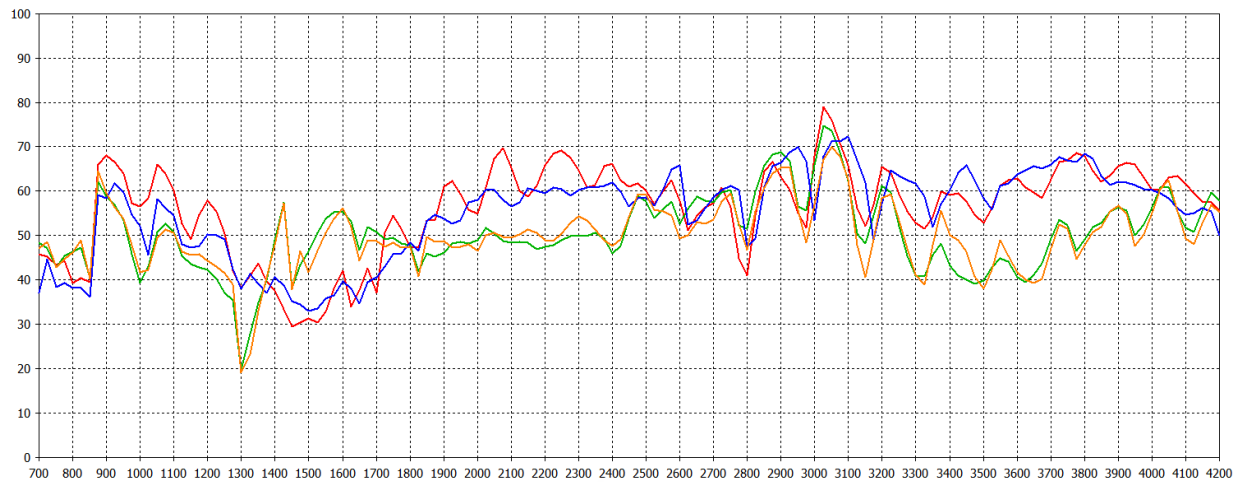


*Efficiency measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable

Typical Swept Peak Gain*

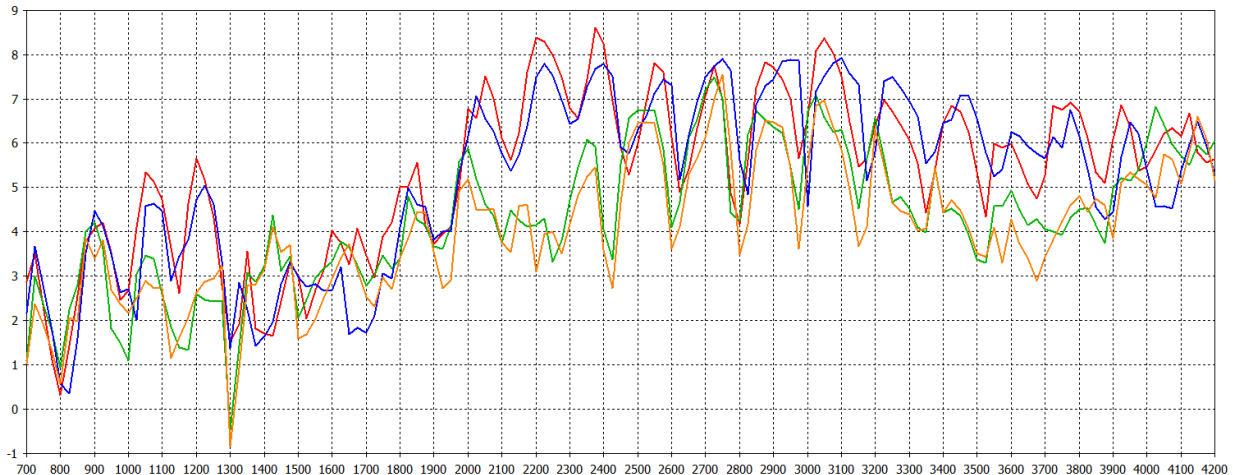


* Swept peak gain measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable

Typical VSWR*

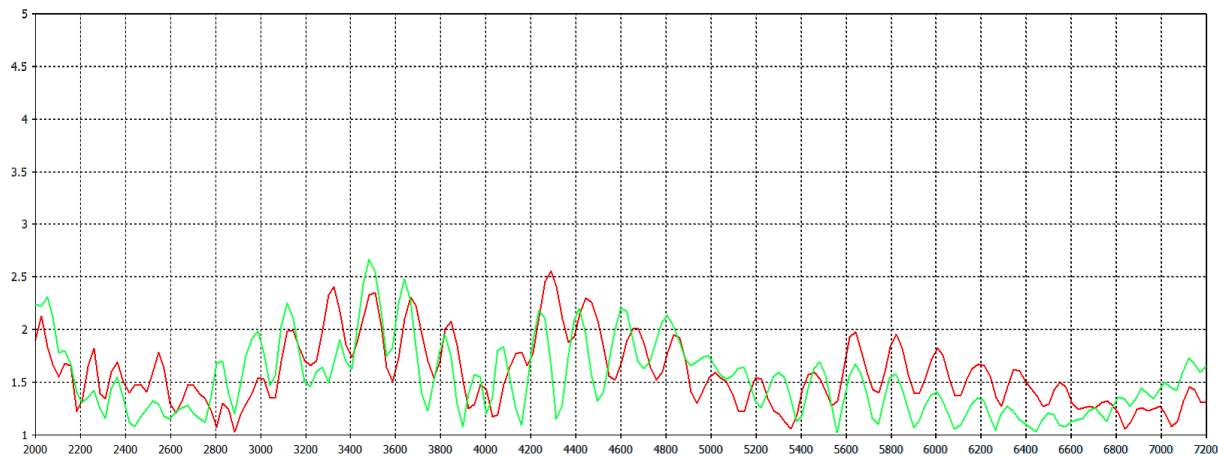


*VSWR measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable

Typical Efficiency*

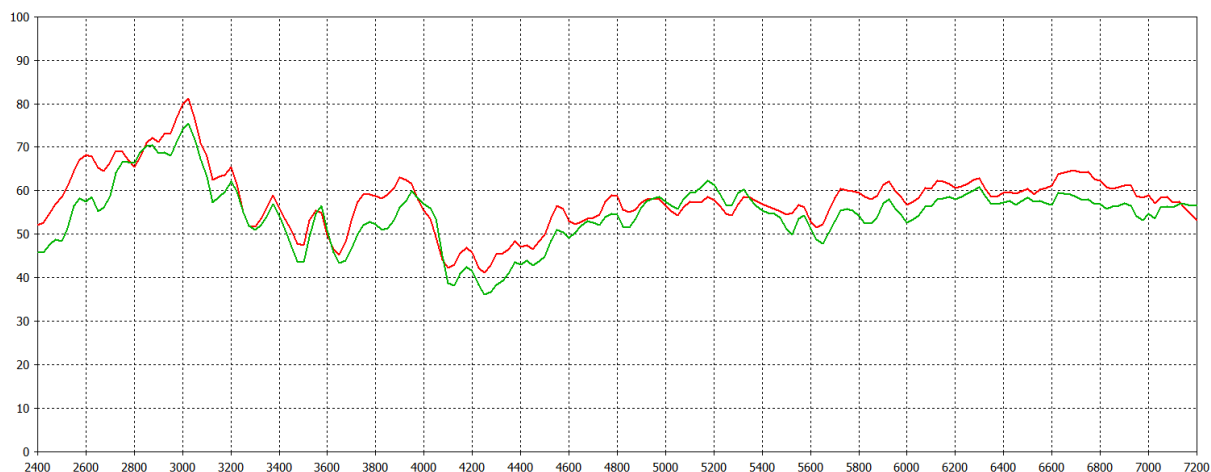

*Efficiency measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable


Typical Swept Peak Gain*

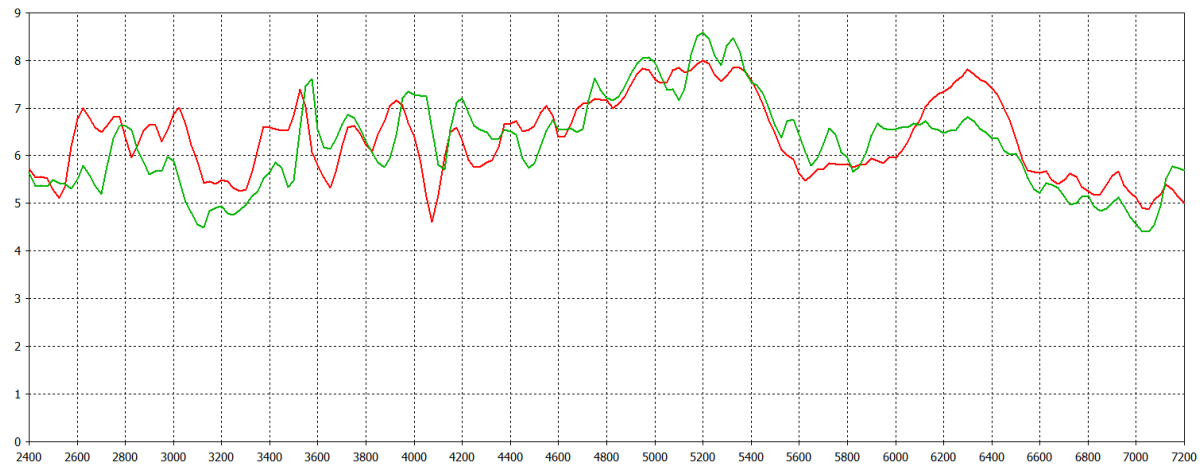


* Swept peak gain measured on a 400x400mm (1.3'x1.3') ground plane with 0.5m (1.6') of CS30 cable

3D Pattern Data on Ground Plane Cell A


Typical 3D Pattern- Cell A - 750 MHz

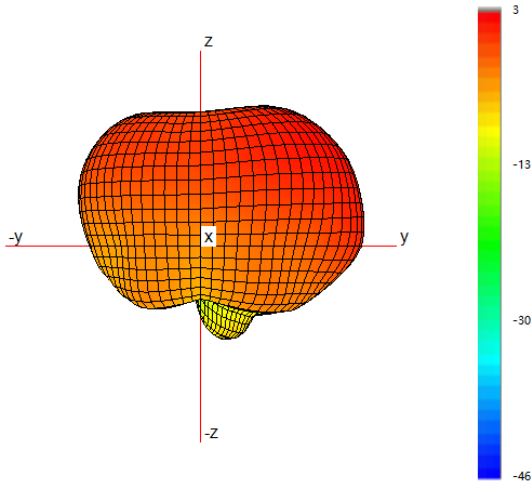


Typical H Plane- Cell A - Patterns- 700-800MHz

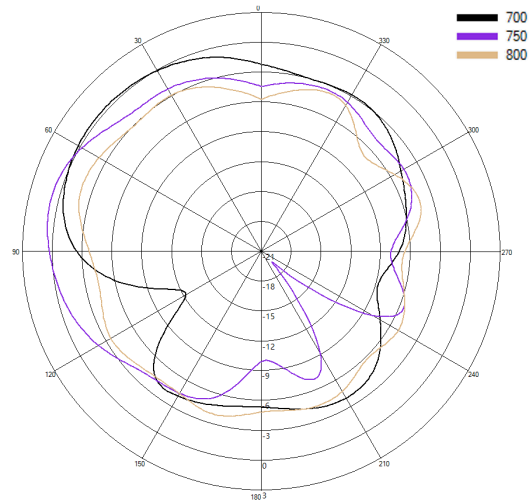


Typical 3D Pattern- Cell A - 850 MHz

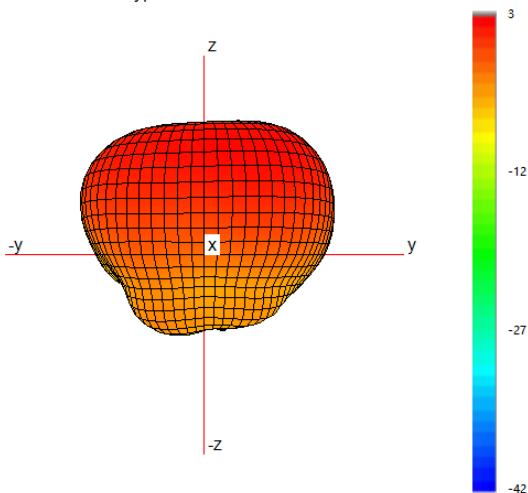


Typical H Plane- Cell A - Patterns- 800-900MHz

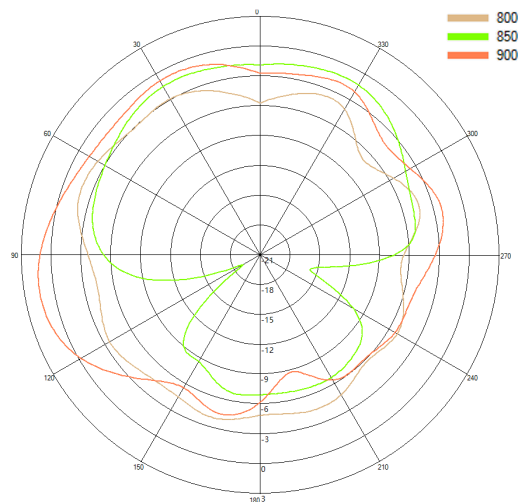

Typical 3D Pattern- Cell A - 1475 MHz

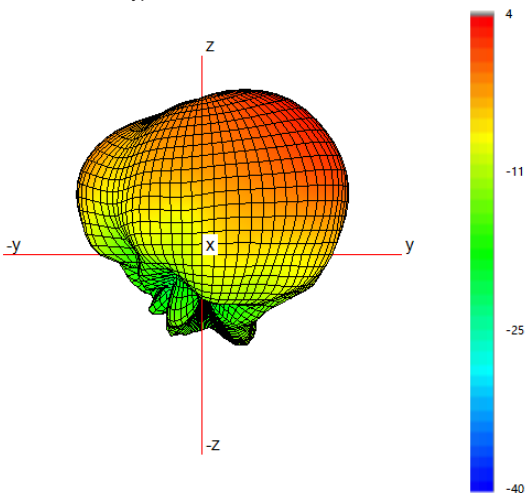


Typical H Plane- Cell A - Patterns- 1450-1500 MHz

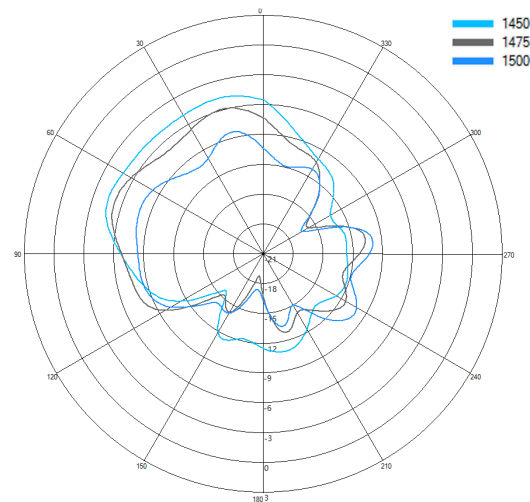


3D Pattern Data on Ground Plane Cell A


Typical 3D Pattern- Cell A - 1800 MHz

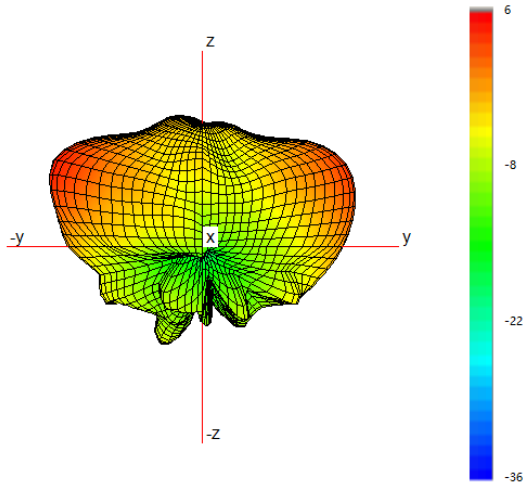


Typical H Plane- Cell A- Patterns- 1750-1850 MHz

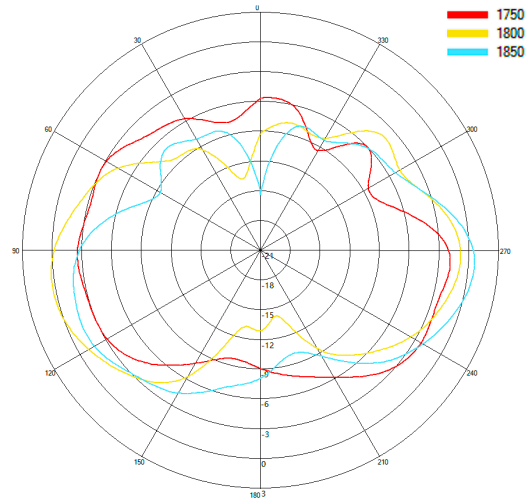


Typical 3D Pattern- Cell A - 2150 MHz

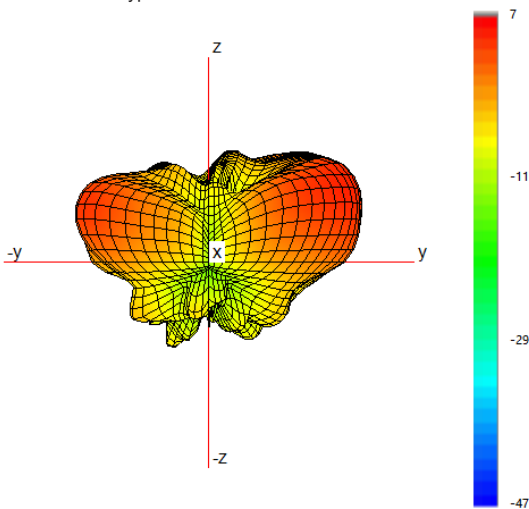


Typical H Plane- Cell A- Patterns- 2100-2200 MHz

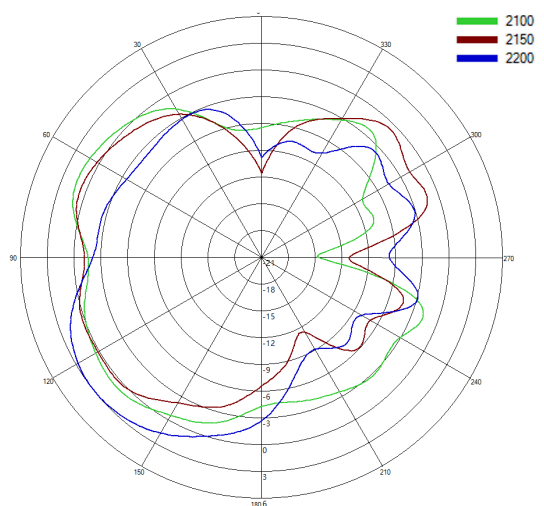

Typical 3D Pattern- Cell A - 2350 MHz

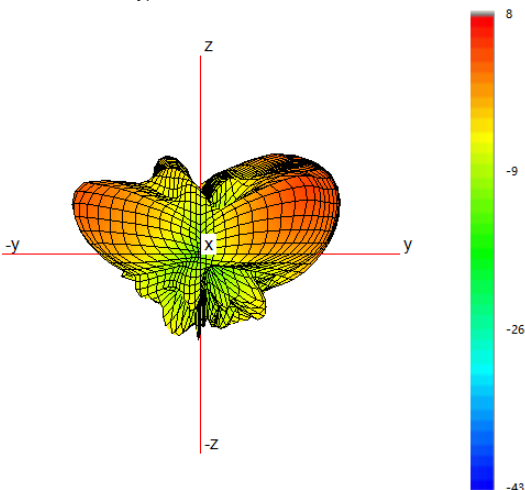


Typical H Plane- Cell A - Patterns- 2300-2400 MHz

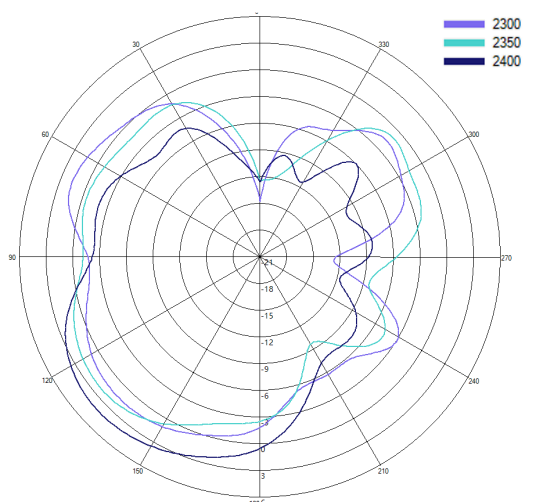


3D Pattern Data on Ground Plane Cell A


Typical 3D Pattern- Cell A - 2650 MHz

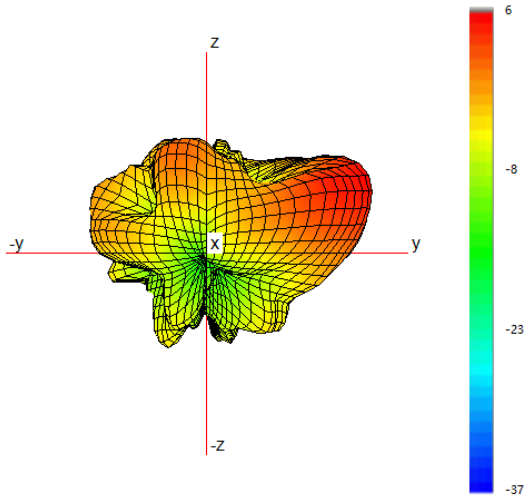


Typical H Plane- Cell A - Patterns- 2600-2700 MHz

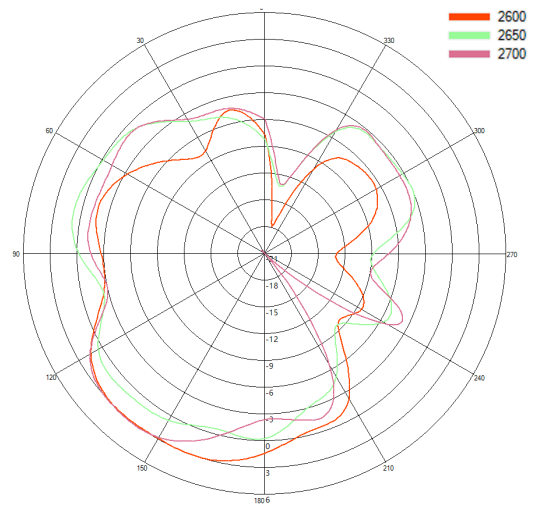

Typical 3D Pattern- Cell A - 3600 MHz

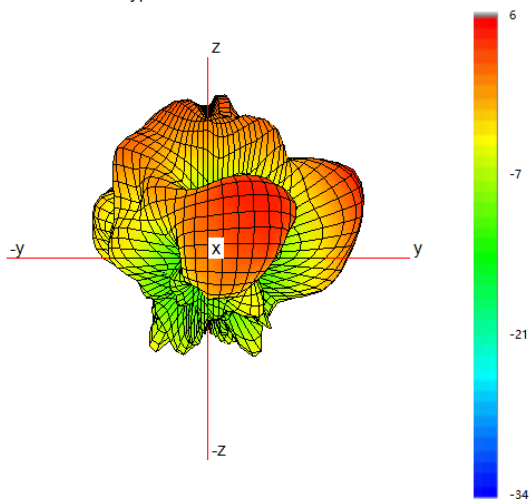


Typical H Plane- Cell A - Patterns- 3400-3800 MHz

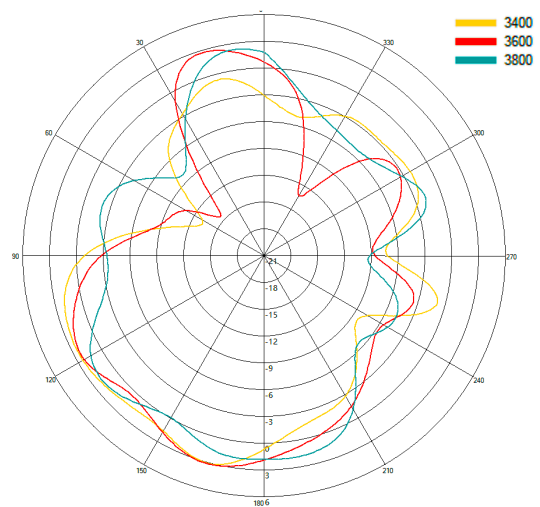


3D Pattern Data on Ground Plane Cell B


Typical 3D Pattern- Cell B - 750 MHz

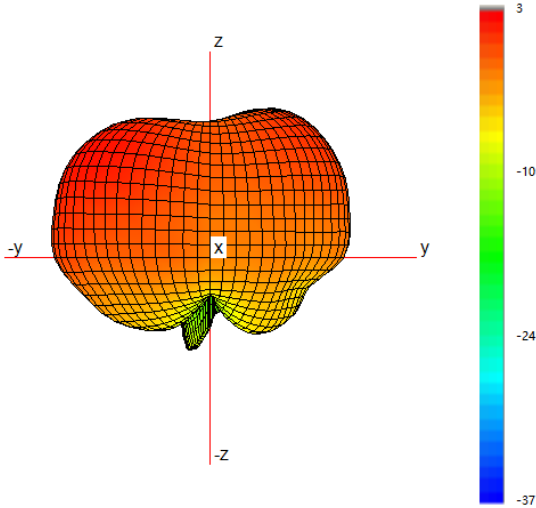


Typical H Plane- Cell B - Patterns- 700-800MHz

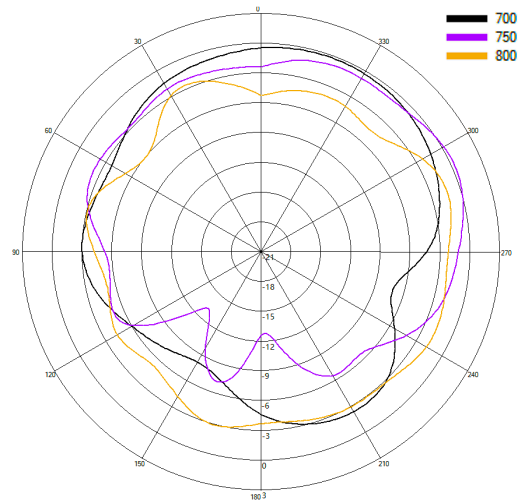


Typical 3D Pattern- Cell B - 850 MHz

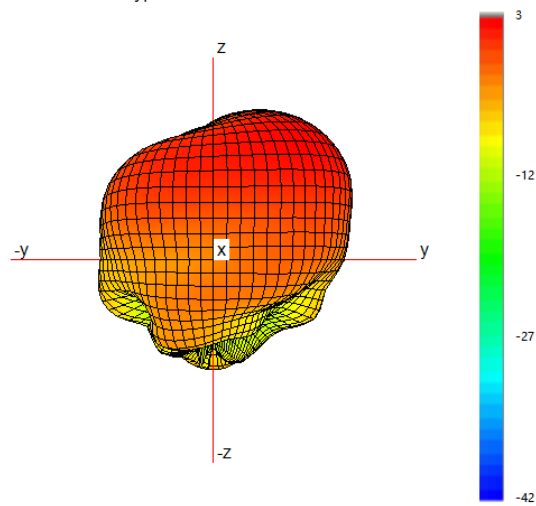


Typical H Plane- Cell B - Patterns- 800-900MHz

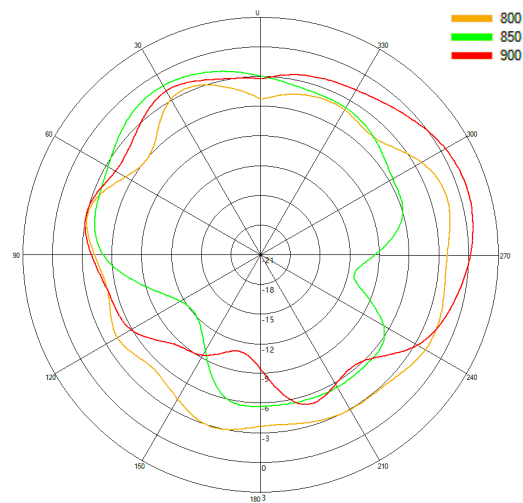

Typical 3D Pattern- Cell B - 1475 MHz

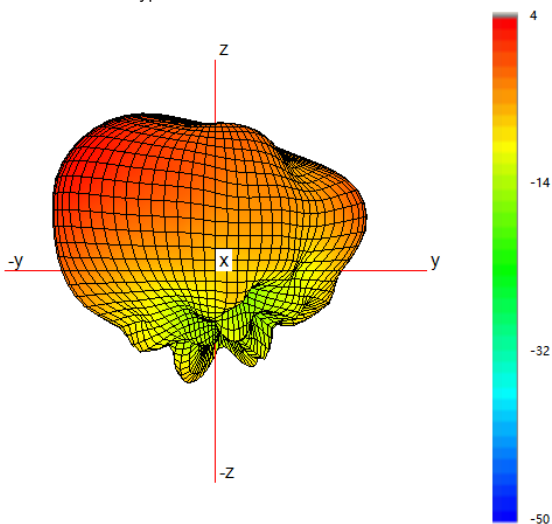


Typical H Plane- Cell B- Patterns- 1450-1500 MHz

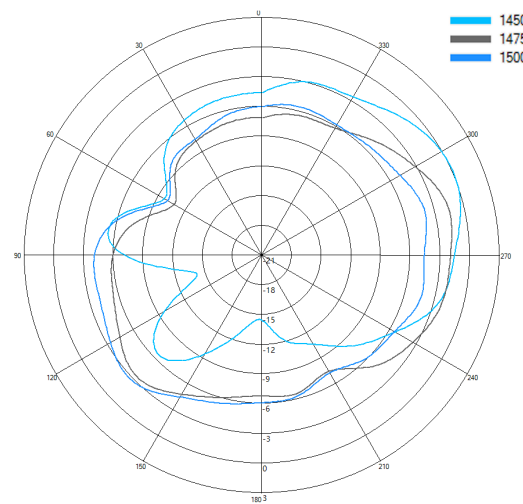


3D Pattern Data on
Ground Plane Cell B


Typical 3D Pattern- Cell B - 1800 MHz

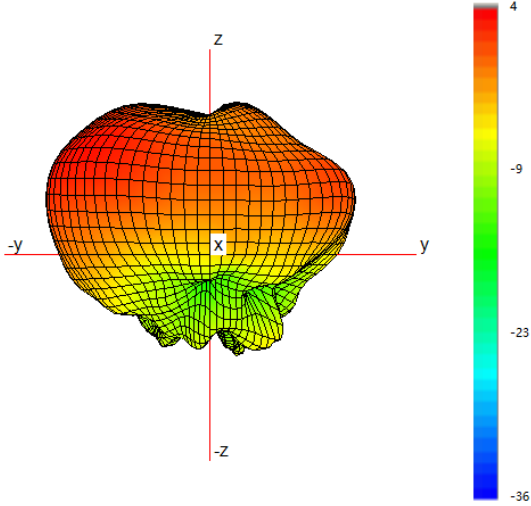


Typical H Plane- Cell B- Patterns- 1750-1850 MHz

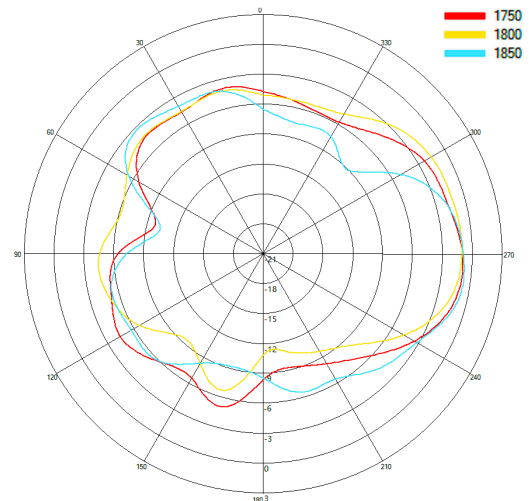


Typical 3D Pattern- Cell B - 2150 MHz

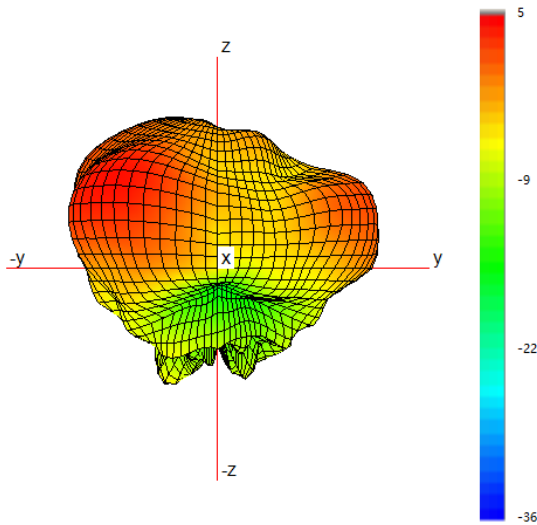


Typical H Plane- Cell B- Patterns- 2100-2200 MHz

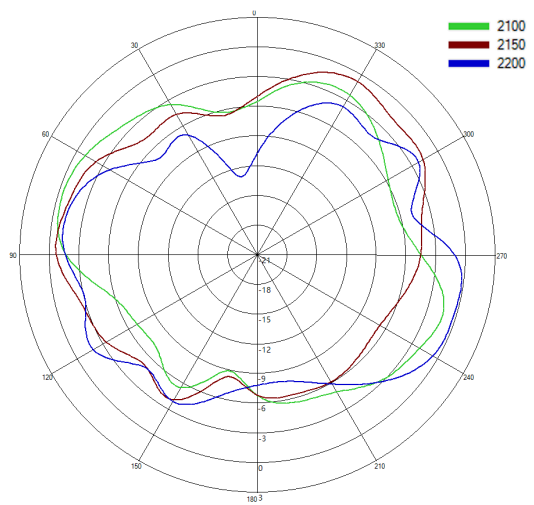

Typical 3D Pattern- Cell B - 2350 MHz

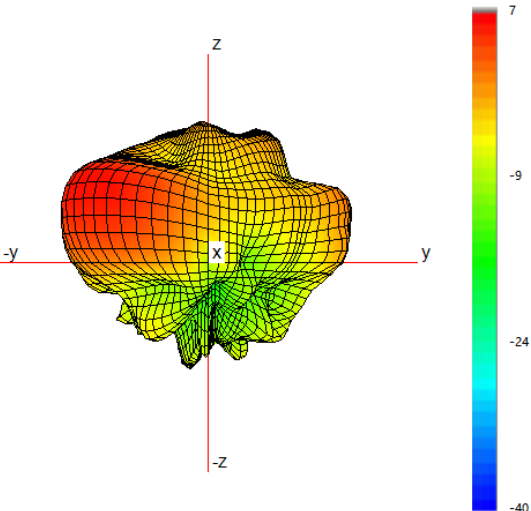


Typical H Plane- Cell B - Patterns- 2300-2400 MHz

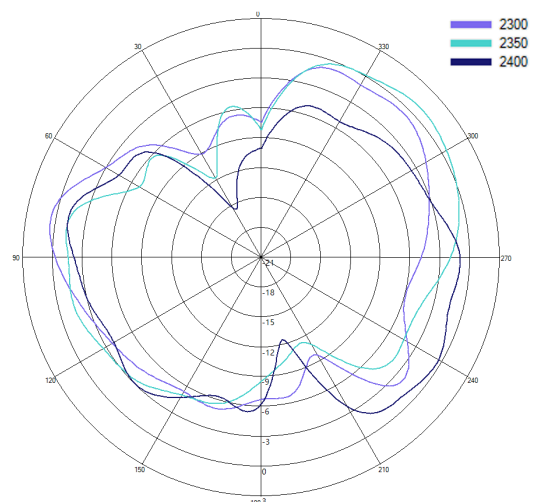


3D Pattern Data on Ground Plane Cell B


Typical 3D Pattern- Cell B - 2650 MHz

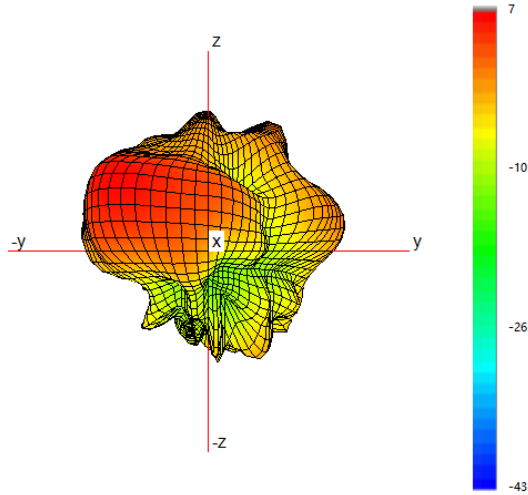


Typical H Plane- Cell B - Patterns- 2600-2700 MHz

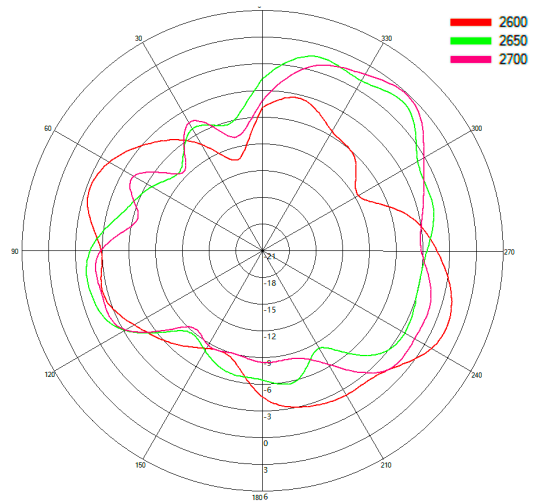

Typical 3D Pattern- Cell B - 3600 MHz

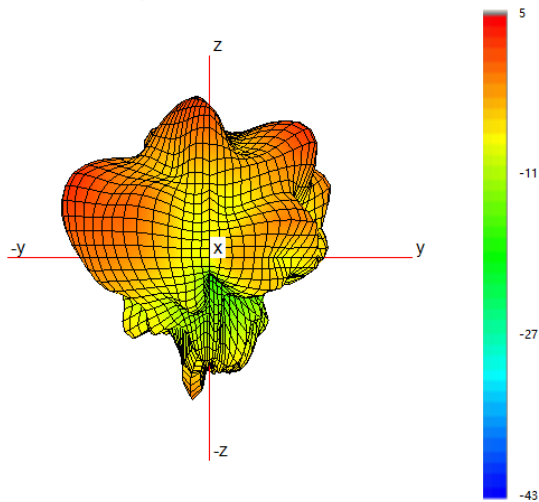


Typical H Plane- Cell B - Patterns- 3400-3800 MHz

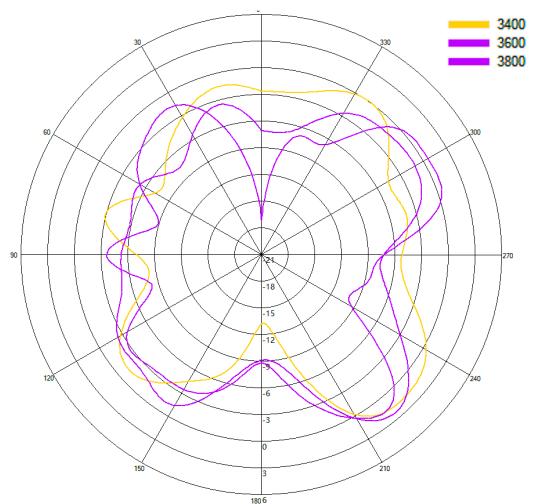


3D Pattern Data on Ground Plane Cell C


Typical 3D Pattern- Cell C - 750 MHz

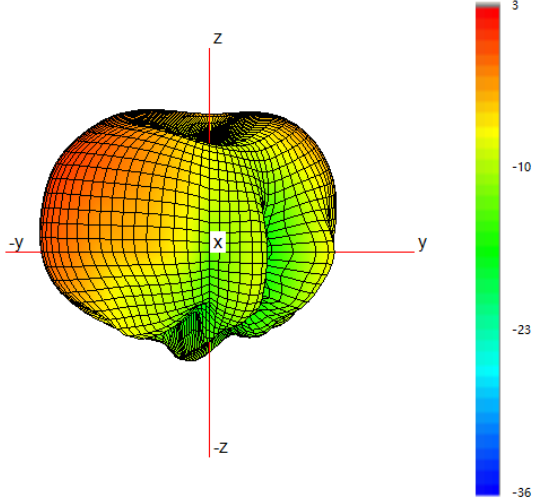


Typical H Plane- Cell C - Patterns- 700-800MHz

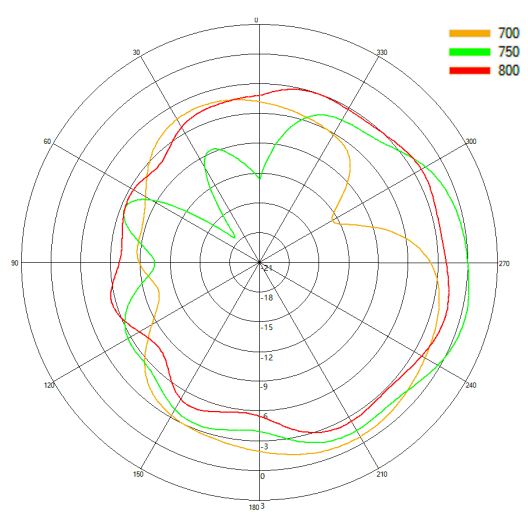


Typical 3D Pattern- Cell C - 850 MHz

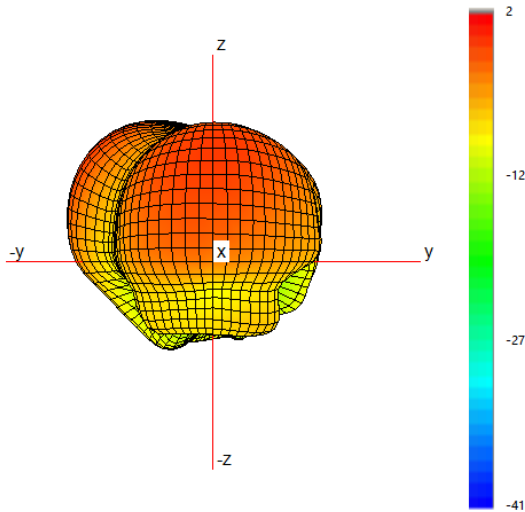


Typical H Plane- Cell C - Patterns- 800-900MHz

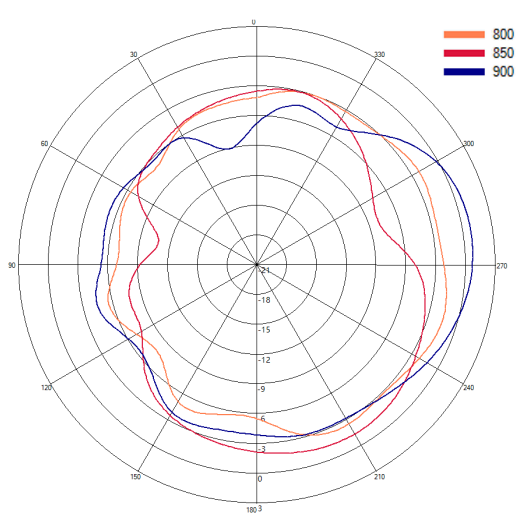

Typical 3D Pattern- Cell C - 1475 MHz

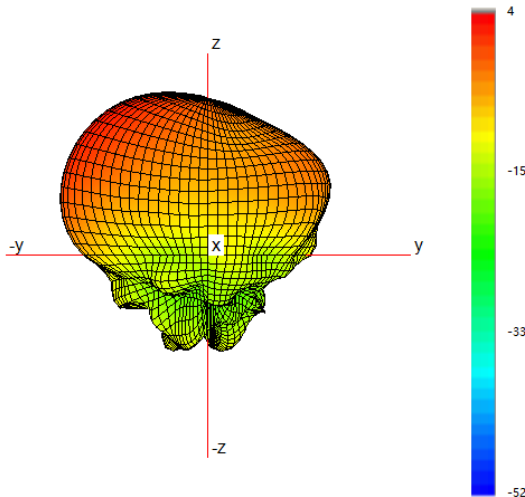


Typical H Plane- Cell C- Patterns- 1450-1500 MHz

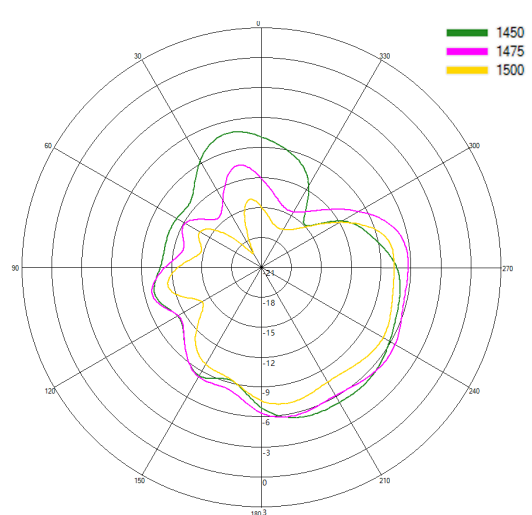


3D Pattern Data on Ground Plane Cell C


Typical 3D Pattern- Cell C - 1800 MHz

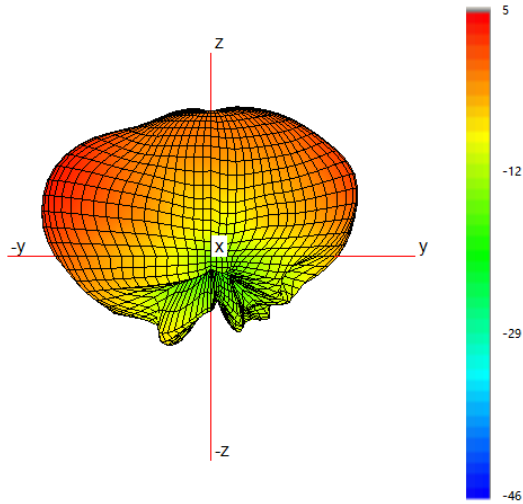


Typical H Plane- Cell C- Patterns- 1750-1850 MHz

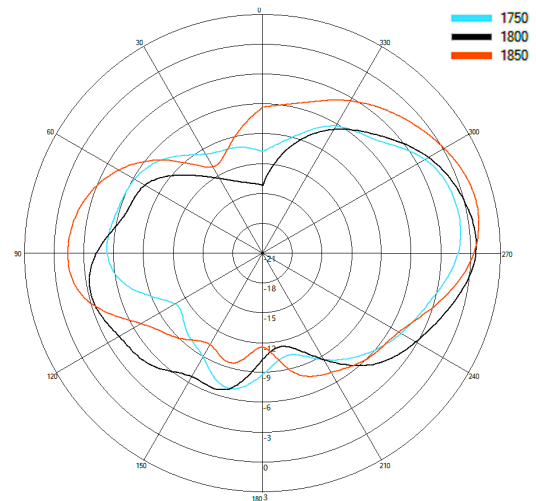


Typical 3D Pattern- Cell C - 2150 MHz

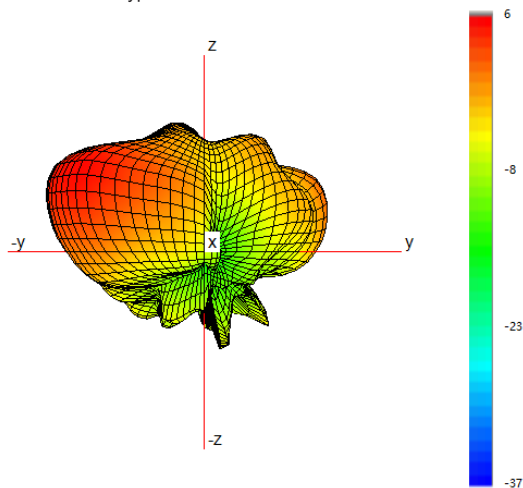


Typical H Plane- Cell C- Patterns- 2100-2200 MHz

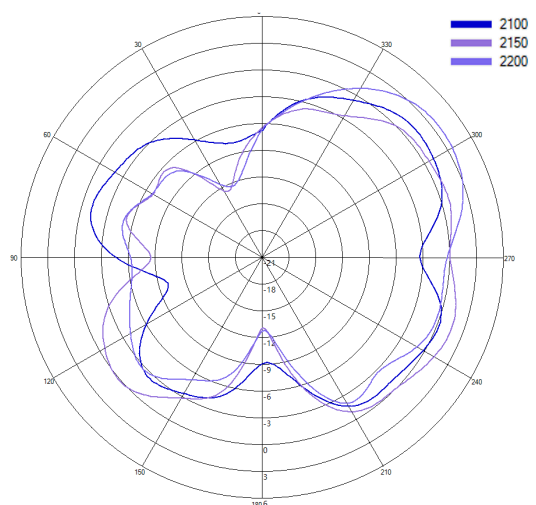

Typical 3D Pattern- Cell C - 2350 MHz

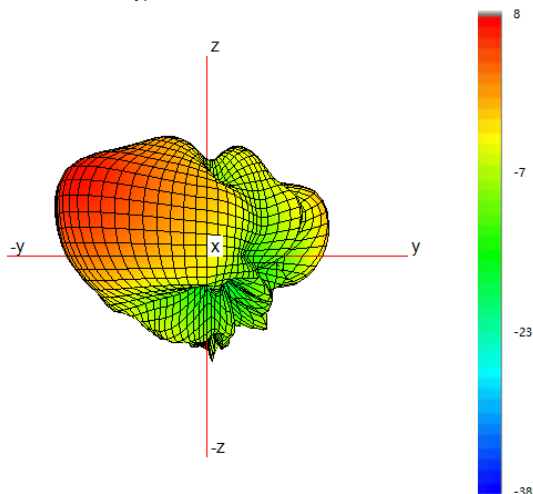


Typical H Plane- Cell C - Patterns- 2300-2400 MHz

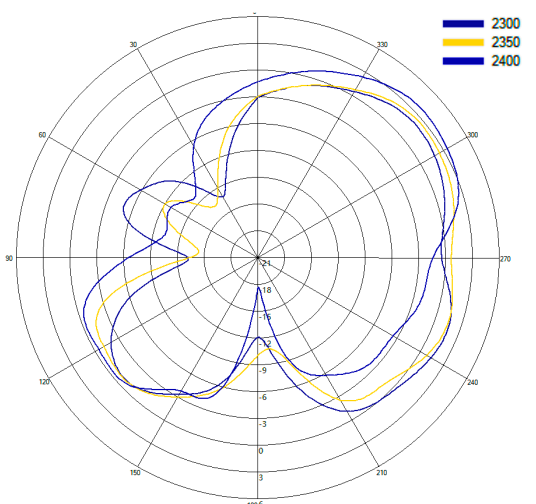


3D Pattern Data on
Ground Plane Cell C


Typical 3D Pattern- Cell C - 2650 MHz

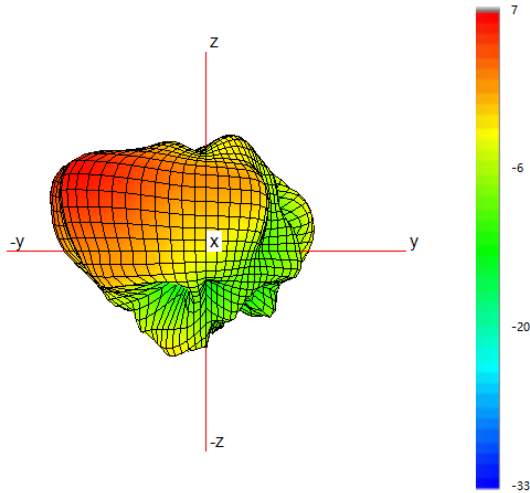


Typical H Plane- Cell C - Patterns- 2600-2700 MHz

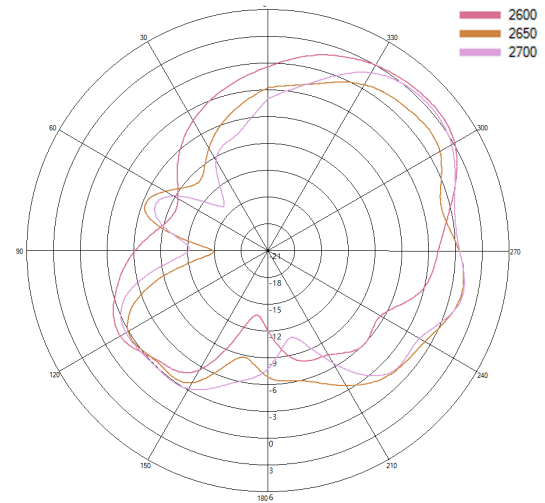

Typical 3D Pattern- Cell C - 3600 MHz

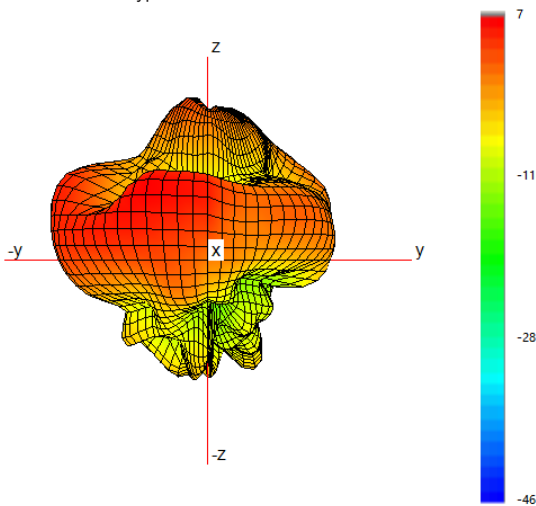


Typical H Plane- Cell C - Patterns- 3400-3800 MHz

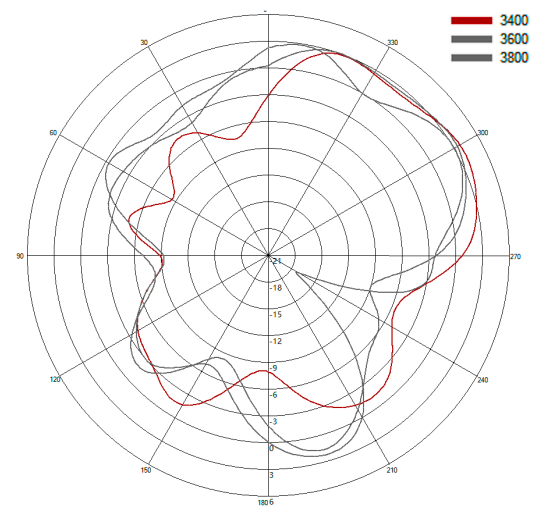


3D Pattern Data on Ground Plane Cell D


Typical 3D Pattern- Cell D - 750 MHz

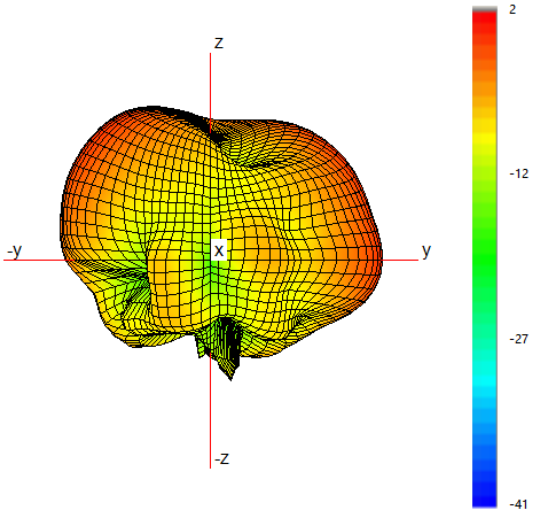


Typical H Plane- Cell D - Patterns- 700-800MHz

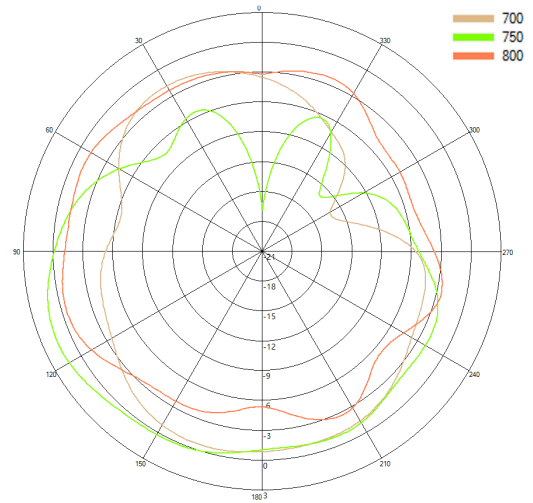


Typical 3D Pattern- Cell D - 850 MHz

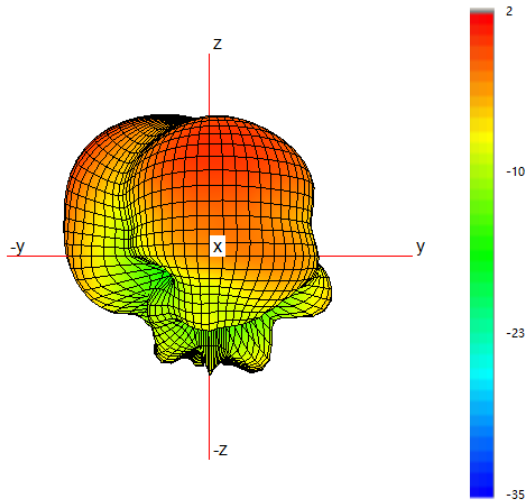


Typical H Plane- Cell D - Patterns- 800-900MHz

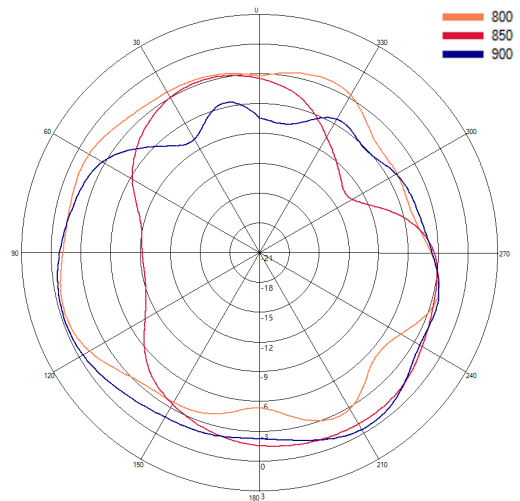

Typical 3D Pattern- Cell D - 1475 MHz

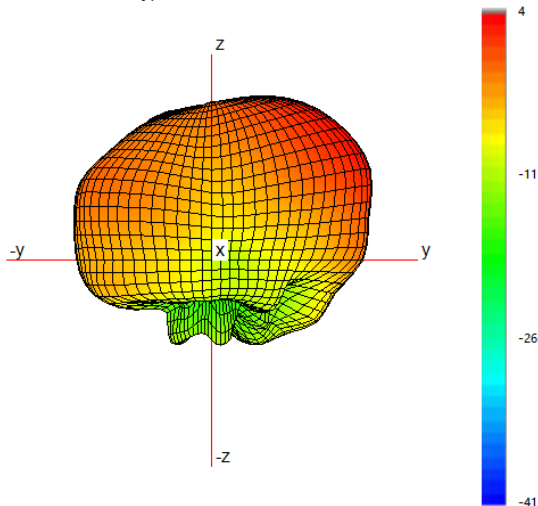


Typical H Plane- Cell D- Patterns- 1450-1500 MHz

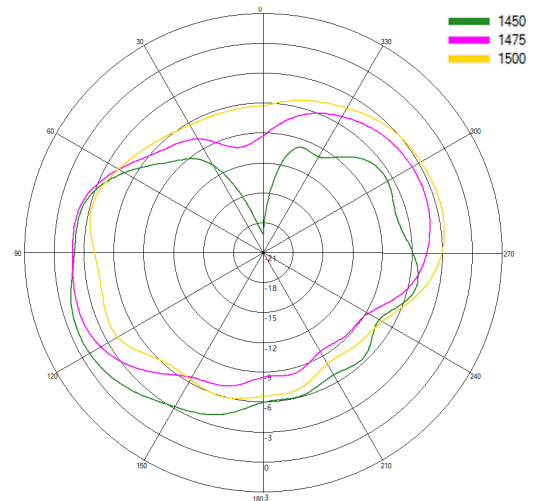


3D Pattern Data on
Ground Plane Cell D


Typical 3D Pattern- Cell D - 1800 MHz

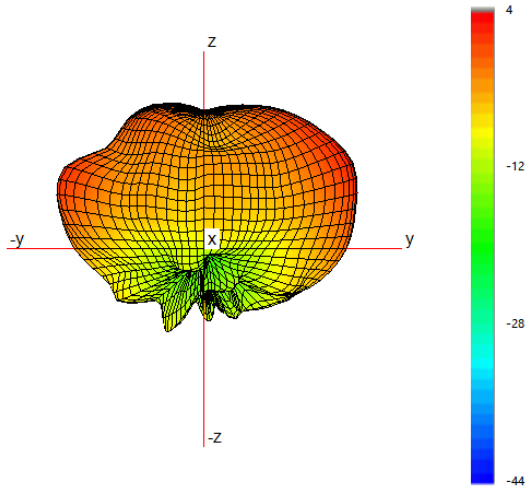


Typical H Plane- Cell D- Patterns- 1750-1850 MHz

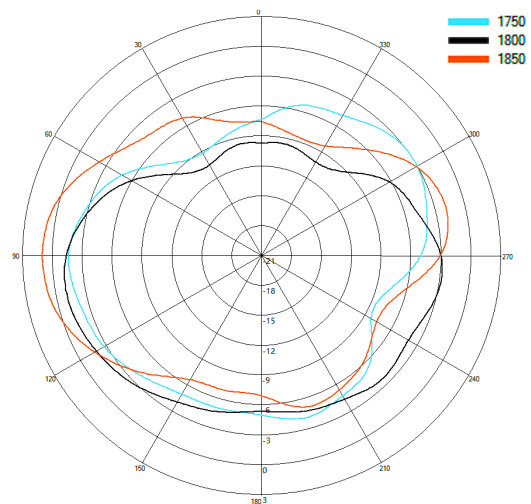


Typical 3D Pattern- Cell D - 2150 MHz

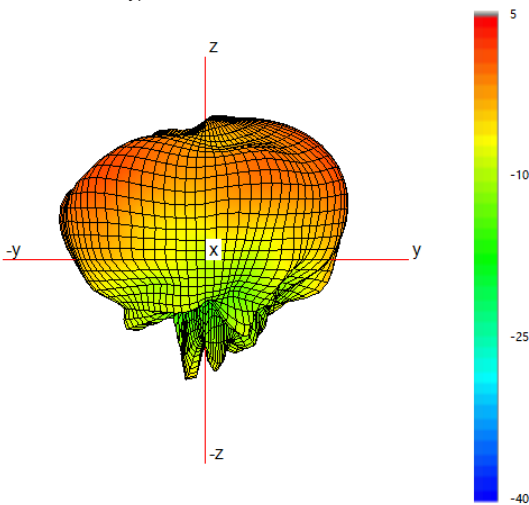


Typical H Plane- Cell D- Patterns- 2100-2200 MHz

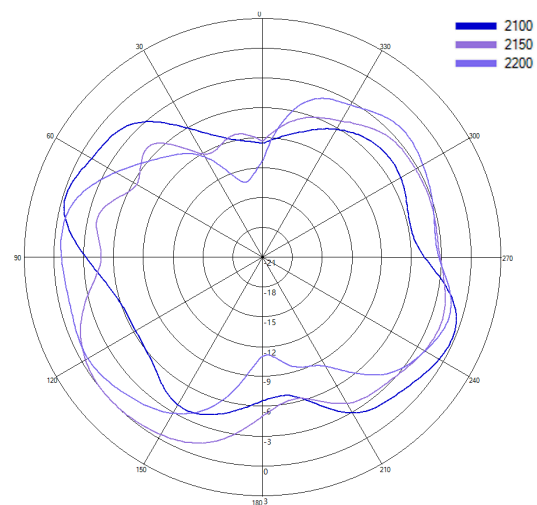

Typical 3D Pattern- Cell D - 2350 MHz

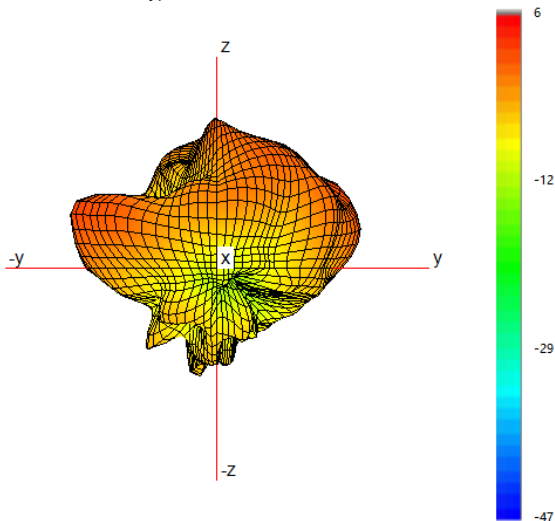


Typical H Plane- Cell D- Patterns- 2300-2400 MHz

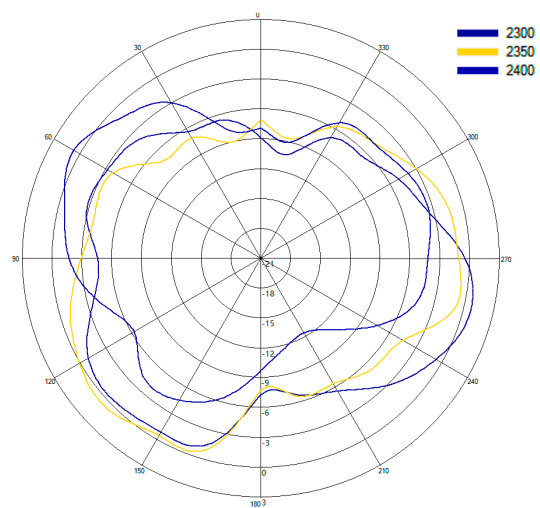


3D Pattern Data on
Ground Plane Cell D


Typical 3D Pattern- Cell D - 2650 MHz

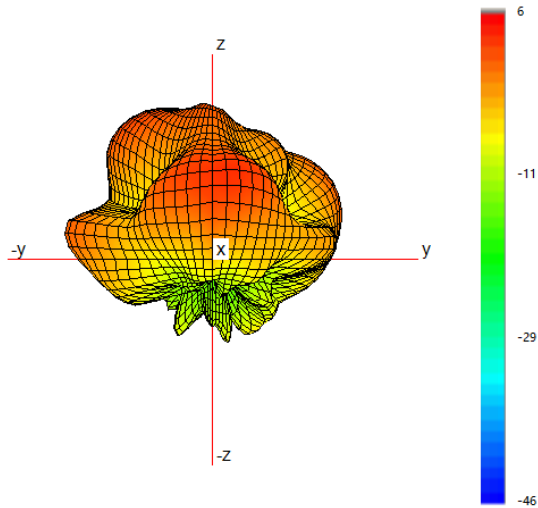


Typical H Plane- Cell D - Patterns- 2600-2700 MHz

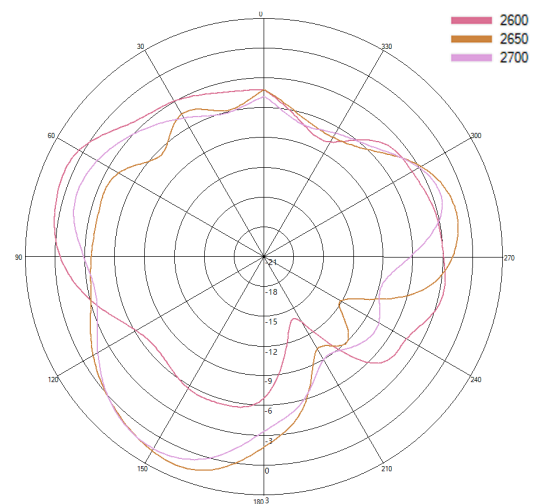

Typical 3D Pattern- Cell D - 3600 MHz

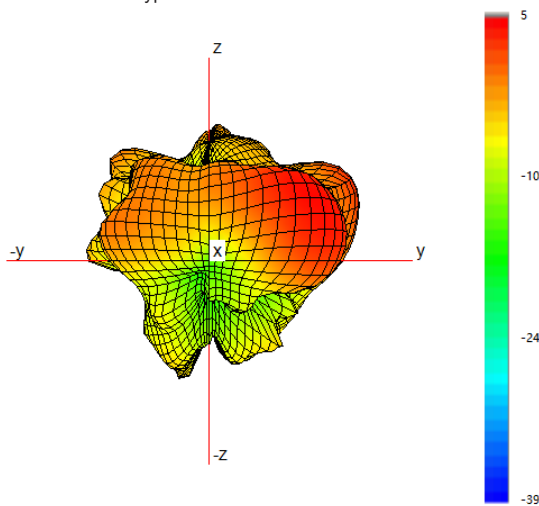


Typical H Plane- Cell D - Patterns- 3400-3800 MHz

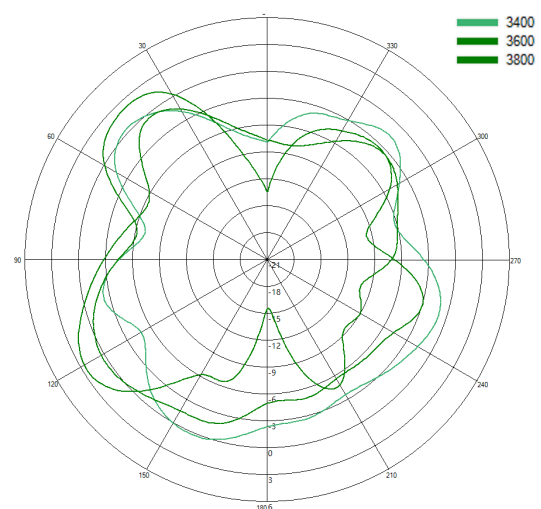


WiFi Pattern-Data on Ground Plane -WiFi -1


Typical 3D Pattern- WiFi - 1 - 2450 MHz

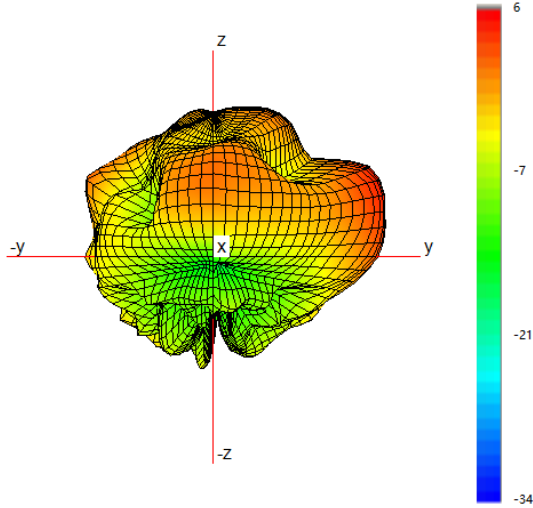


Typical H Plane- WiFi - 1 - Patterns- 2400-2475MHz

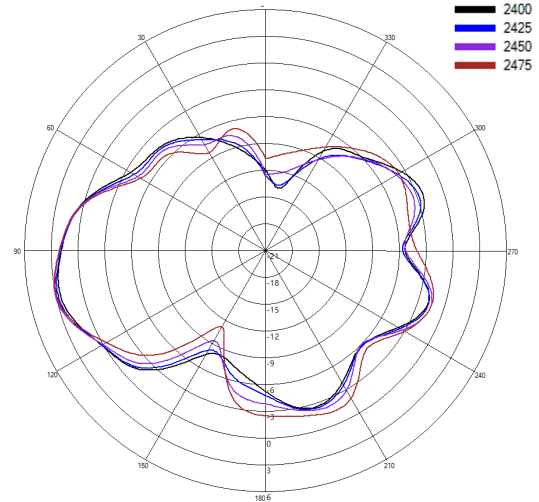


Typical 3D Pattern- WiFi - 1 - 5500 MHz

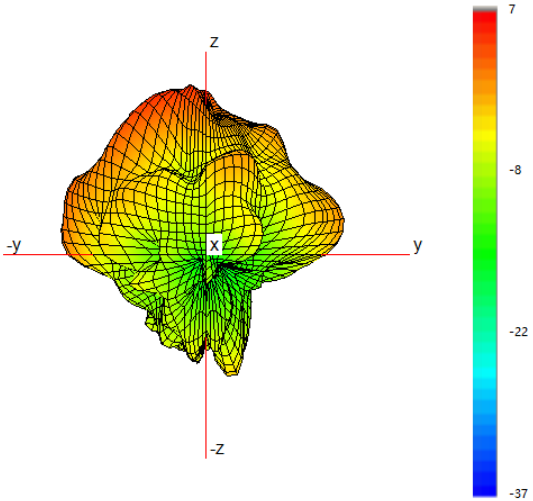


Typical H Plane- WiFi - 1 - Patterns- 5200-5800MHz

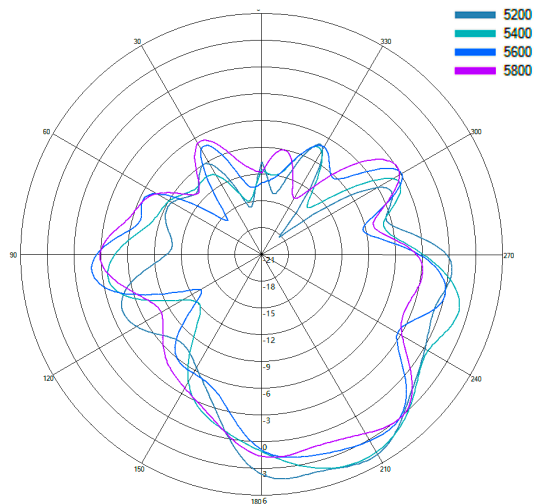

Typical 3D Pattern- WiFi - 1 - 6500 MHz

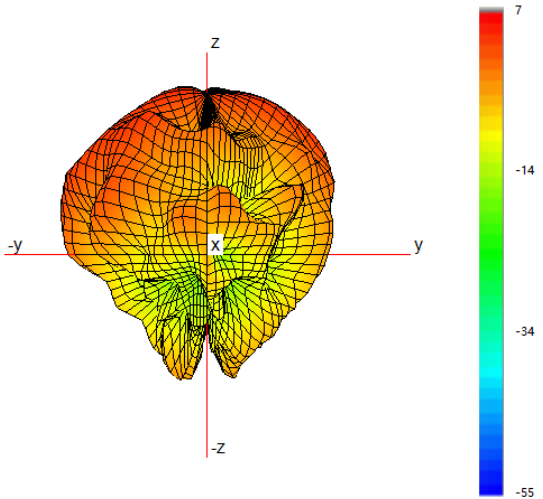


Typical H Plane- WiFi - 1 - Patterns- 6200-6800MHz

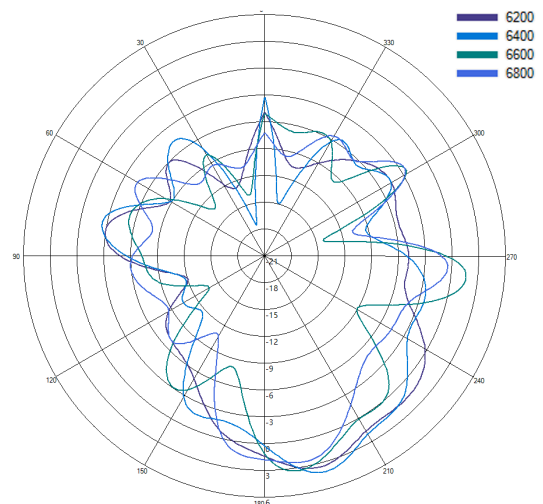


WiFi Pattern-Data on Ground Plane -WiFi -2


Typical 3D Pattern- WiFi - 2 - 2450 MHz

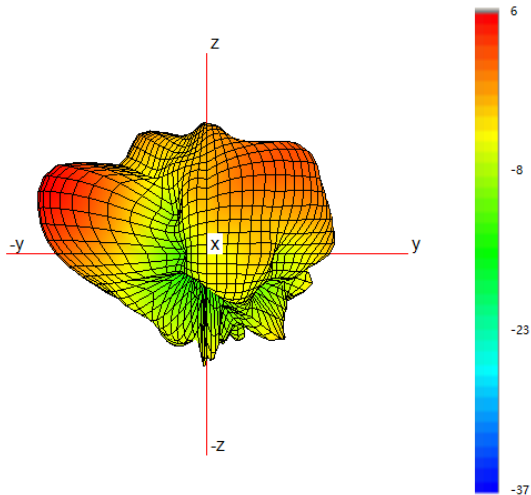


Typical H Plane- WiFi - 2 - Patterns- 2400-2475MHz

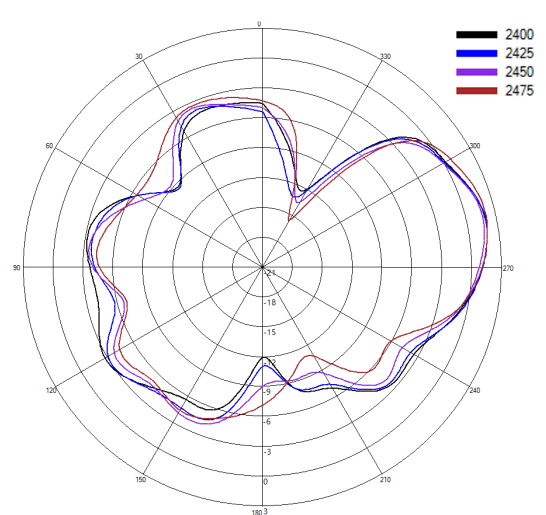


Typical 3D Pattern- WiFi - 2 - 5500 MHz

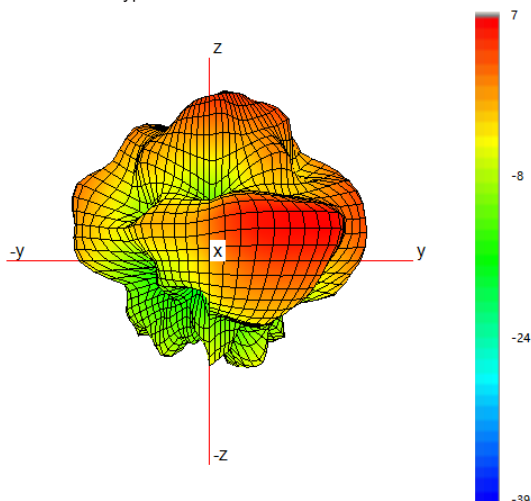


Typical H Plane- WiFi - 2 - Patterns- 5200-5800MHz

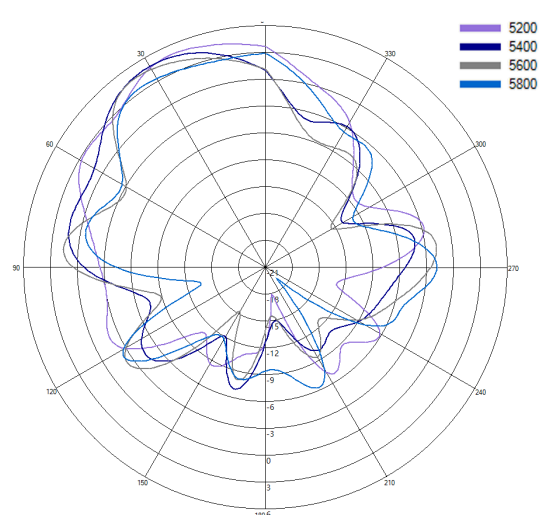

Typical 3D Pattern- WiFi - 2 - 6500 MHz

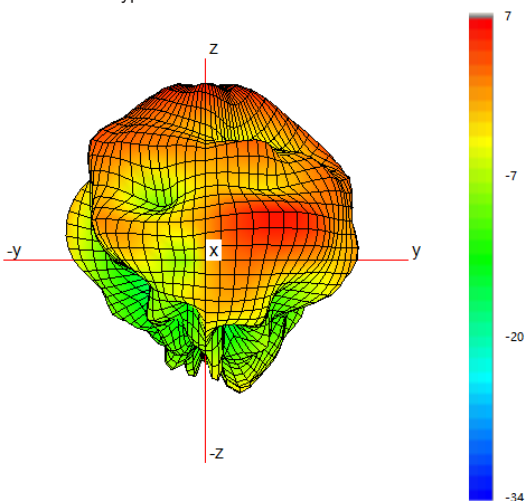


Typical H Plane- WiFi - 2 - Patterns- 6200-6800MHz

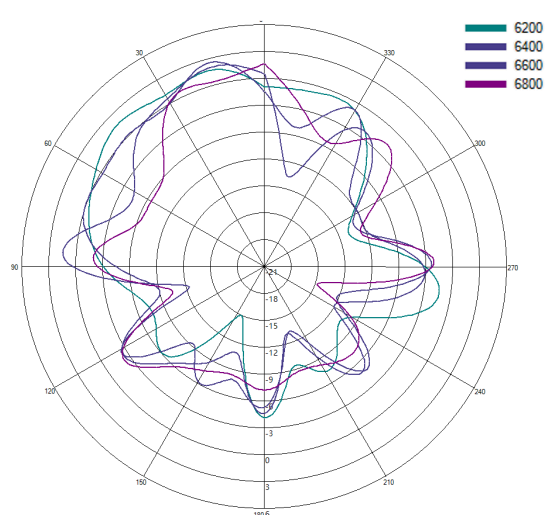


Electrical Data- L1
GPS/GNSS


Swept Gain GPS/GNSS

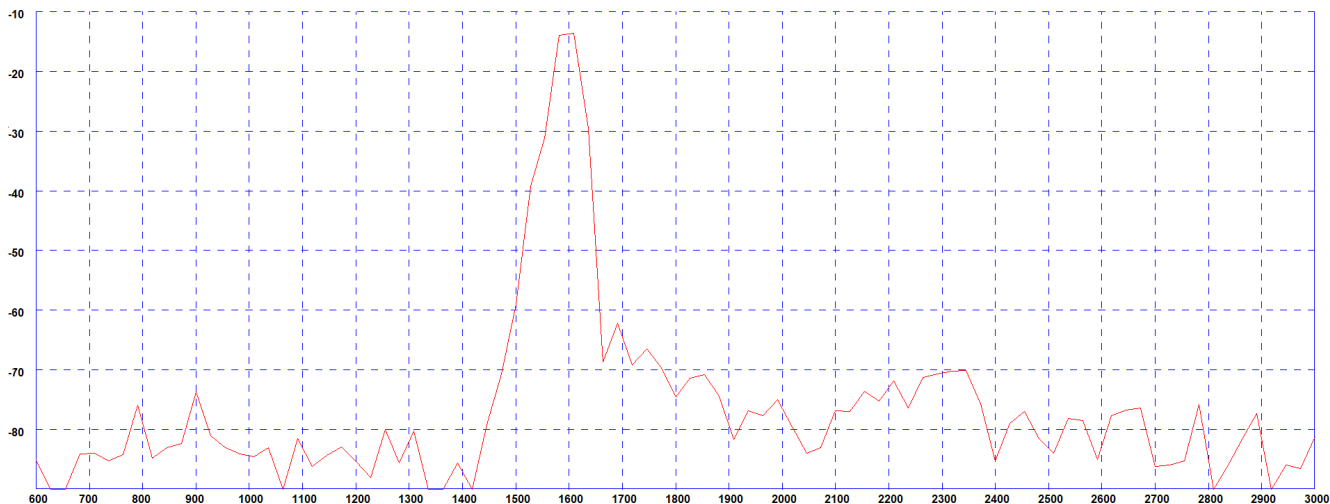


Typical E Plane Pattern - GPS/GNSS 1575 MHz

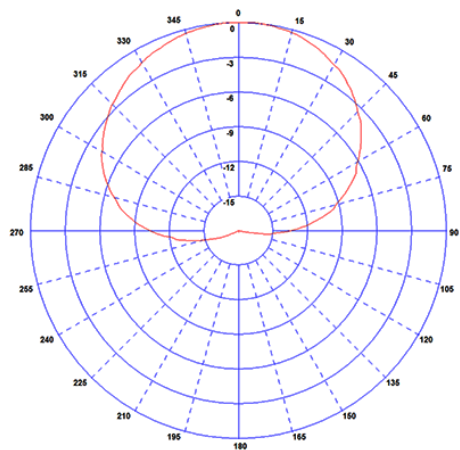


Typical E Plane Pattern - GPS/GNSS 1602 MHz

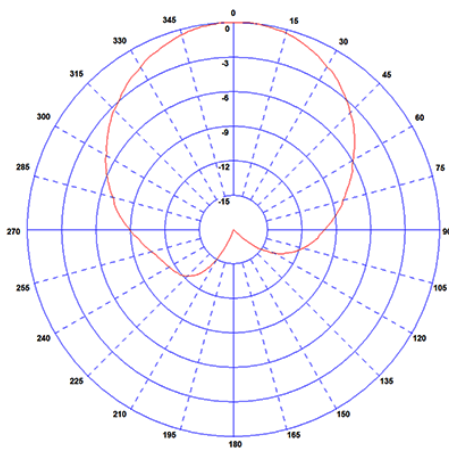


GPS/GNSS Measurements taken on 190x190mm (7.4" x 7.4") ground plane excluding cable loss

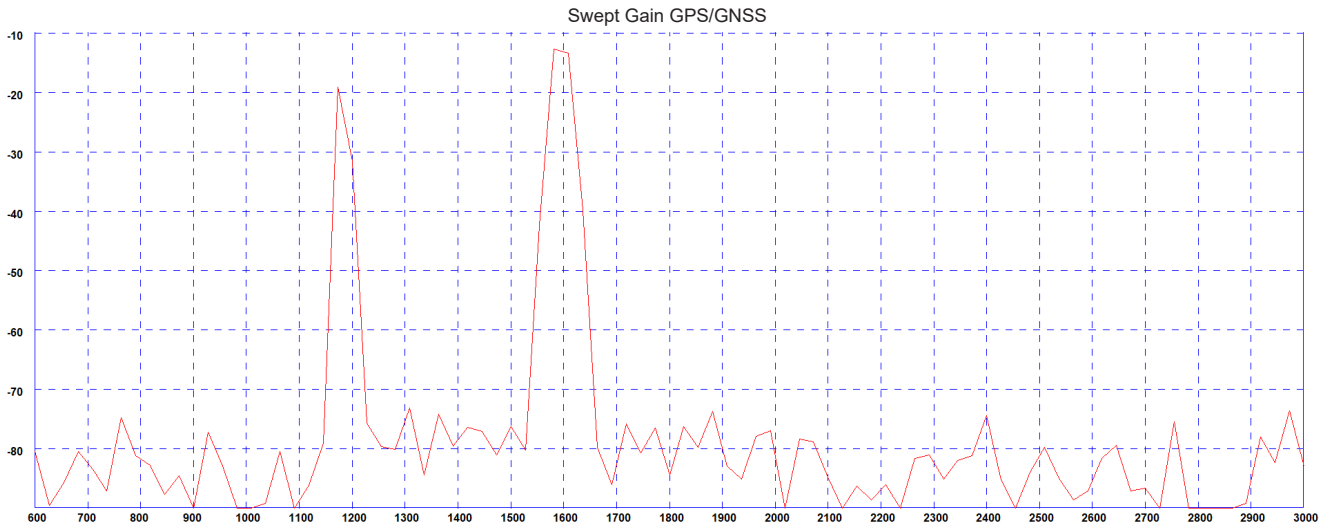


Typical E Plane Pattern - GPS/GNSS 1575 MHz

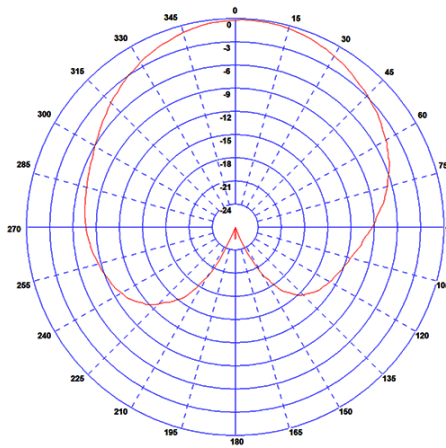

Typical E Plane Pattern - GPS/GNSS 1602 MHz

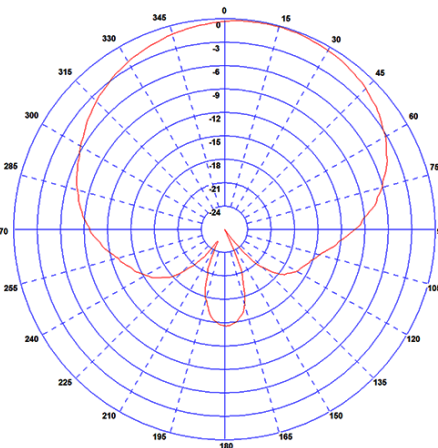

Typical E Plane Pattern - GPS/GNSS 1176 MHz

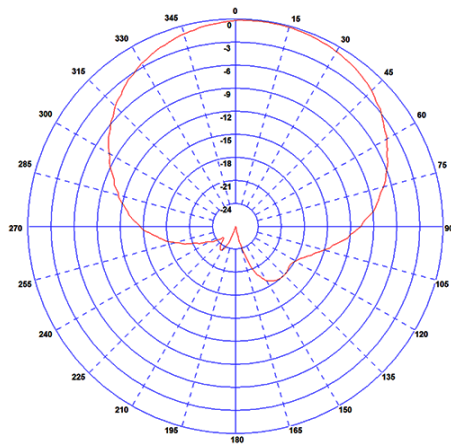

GPS/GNSS Measurements taken on 190x190mm (7.4" x 7.4") ground plane excluding cable loss