

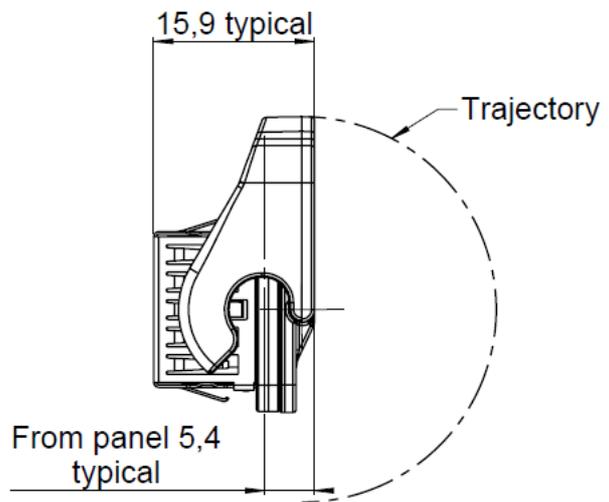
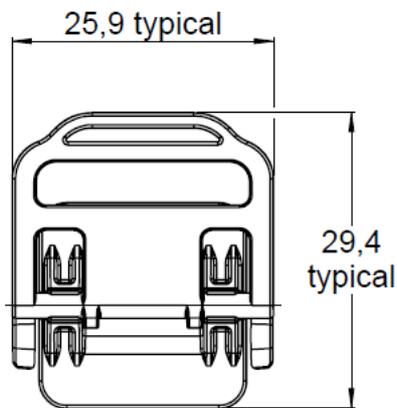


PAGE 1/2	ISSUE 05-02-19A	SERIES OCTIS	PART NUMBER OCTI957500
----------	------------------------	---------------------	-------------------------------

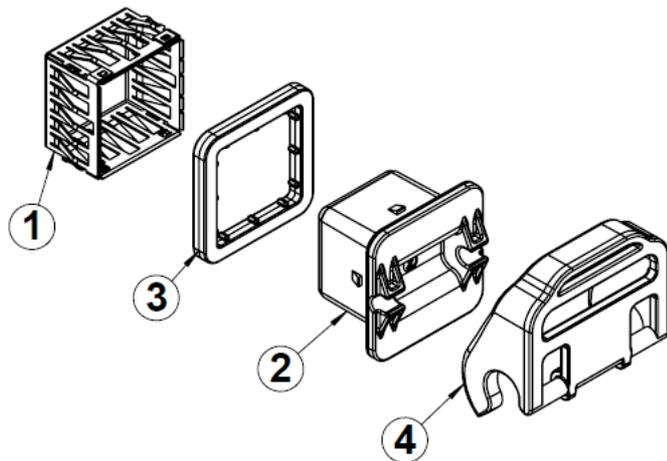

Packing configuration

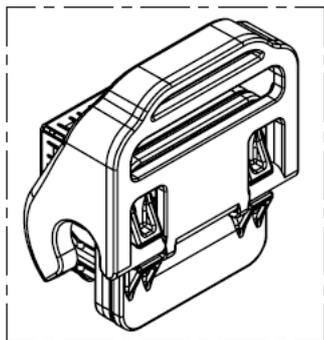

All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Grounding ring	STAINLESS STEEL	-
2	Protective cap	PBT GF	-
3	Interface sealing gasket	SILICONE	-
4	Lever	IXEF	-

PAGE 2/2	ISSUE 05-02-19A	SERIES OCTIS	PART NUMBER OCTI957500
----------	-----------------	--------------	------------------------

GENERAL CHARACTERISTICS

Mechanical Mating endurance (cycles) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-1 -	100 - 6.5100
Environmental Protection class Operating temperature (°C) Storage temperature (°C) Humidity (damp heat) (%RH) Salt Mist RoHS Flammability UVB Resist (h)	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154 cycle 2	IP67 * -40 / +85 -65 / +85 5 / 95 720h * Compliant V0 Compliant
Others: Installation Packaging	- -	For use with standard OCTIS™ panel interface or receptacle ** Unitary in plastic bag

* Mated condition

** If the interface is to be die casted into the equipment panel, please contact Radiall for license conditions and interface definition

INSTALLATION

